



Air Conditioning & Heating



PRODUCT SPECIFICATIONS

GSH14

14 SEER

1½ TO 5 TON

SPLIT SYSTEM HEAT PUMP

COOLING AND HEATING CAPACITIES
18,000 BTU/H TO 55,000 BTU/H



The Goodman® GSH14 14 SEER Heat Pump features the high-efficiency Copeland® scroll compressor that provides improved temperature and humidity control throughout the home. The GSH14 has an attractive louvered metal guard to protect the coil from damage and strengthen the unit, while the base pan elevates the unit above the slab for excellent water drainage. A powder-paint finish provides premium durability and improved UV protection.

Standard Features

- High-efficiency scroll compressor
- R-22 refrigerant-charged for 15' of refrigerant lines
- 850-RPM condenser fan motor
- Liquid refrigerant return protection
- Factory-installed bi-flow liquid-line filter dryer
- Copper tube/enhanced aluminum fin coil
- Low-pressure switch
- Reliable, time-initiated, temperature-terminated defrost control
- Sweat connection service valves with easy access to gauge ports
- ARI Certified; ETL Listed

Cabinet Features

- Unique Goodman® sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Contents

Nomenclature	2
Product Specifications	3
Expanded Cooling Data	4
Expanded Heating Data	18
ARI Performance Ratings	20
Dimensions	34
Accessories	35



NOMENCLATURE

	G	S	H	14	036	1	A	A	
	1	2	3	4,5	6,7,8	9	10	11	
Brand									Engineering *
G Goodman® (Standard Feature Set Models)									Minor Revision
S Goodman® (High Feature Set Models)									Engineering *
									Major Revision
Product Category									Electrical
S Split System									
Unit Type									
C Condenser R-22							1	208/230 V, 1 Phase, 60 Hz	
X Condenser R-410A							2	220/240 V, 1 Phase, 50 Hz	
H Heat Pump R-22							3	208/230 V, 3 Phase, 60 Hz	
Z Heat Pump R-410A							4	460 V, 3 Phase, 60 Hz	
							5	380/415 V, 3 Phase, 50 Hz	
Efficiency									Nominal Capacity
13 13 SEER							018	1½ Tons	048 4 Tons
14 14 SEER							024	2 Tons	060 5 Tons
16 16 SEER							030	2½ Tons	090 7½ tons
							036	3 Tons	120 10 Tons
							042	3½ Tons	

* Neither used for order entry or inventory management.

Important EnergyStar Notice: Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet EnergyStar criteria. Ask your contractor for details or visit www.energystar.gov.

SPECIFICATIONS

	GSH14 0181A	GSH14 0241A	GSH14 0301A	GSH14 0361A	GSH14 0421A	GSH14 0481A	GSH14 0601A
Capacities and Ratings							
Nominal Cooling (BTU/h)	18,000	24,000	28,000	34,600	39,600	46,000	55,000
Nominal Heating (BTU/h)	18,000	24,000	27,600	34,600	39,600	46,000	55,000
Decibels	70	72	72	73	73	74	75
Compressor							
RLA	9	10.9	12.2	13.4	16.0	18.3	19.8
LRA	41.0	54.0	63.0	73.0	88.0	109.0	137.0
Condenser Fan Motor							
Horsepower	1/12	1/6	1/6	1/4	1/4	1/4	1/4
FLA	0.6	1.10	1.10	1.50	1.50	1.50	1.50
Refrigeration System							
Refrigerant Line Size¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	160	160	165	220	220	280	285
Shipped with Orifice Size	TXV	TXV	TXV	TXV	TXV	TXV	TXV
Electrical Data							
Volts / Hz / Phase	208/230-60-1				208/230-60-1		
Minimum Circuit Ampacity ²	11.8	14.7	16.3	18.3	21.5	27.8	27.3
Max. Overcurrent Protection ³	20	20	20	30	30	40	40
Min / Max Volts	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253	197 / 253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Ship Weight (lbs)	199	207	207	242	242	266	280

¹ Tested and rated in accordance with ARI Standard 210/240

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Notes

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil. THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.

EXPANDED COOLING DATA — GSH140181A* / CA*F3131B6A*+TXV / MBR800**~1

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70	675	MBh	17.6	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	15.6	16.2	17.7	-	14.4	15.0	16.4	-	14.4	15.0	16.4	-	14.4	15.0	16.4	-															
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-															
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-															
		kW	1.20	1.22	1.26	-	1.29	1.32	1.36	-	1.37	1.40	1.44	-	1.44	1.47	1.51	-	1.49	1.53	1.58	-	1.55	1.58	1.63	-	1.55	1.58	1.63	-	1.55	1.58	1.63	-															
		Amps	4.4	4.5	4.6	-	4.7	4.8	5.0	-	5.1	5.3	5.4	-	5.5	5.6	5.8	-	5.8	6.0	6.2	-	6.2	6.3	6.5	-	6.2	6.3	6.5	-	6.2	6.3	6.5	-															
	Hi PR	140	151	159	-	157	169	179	-	179	193	204	-	204	220	232	-	229	247	261	-	254	273	288	-	254	273	288	-	254	273	288	-																
	Lo PR	63	67	73	-	67	71	77	-	69	74	80	-	73	77	84	-	76	81	88	-	79	84	91	-	79	84	91	-	79	84	91	-																
	600	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-	14.0	14.5	15.9	-	14.0	14.5	15.9	-															
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-															
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-	18	15	12	-															
kW		1.19	1.22	1.25	-	1.28	1.31	1.35	-	1.36	1.38	1.43	-	1.42	1.46	1.50	-	1.48	1.51	1.56	-	1.53	1.57	1.62	-	1.53	1.57	1.62	-	1.53	1.57	1.62	-																
Amps		4.4	4.5	4.6	-	4.7	4.8	5.0	-	5.1	5.2	5.4	-	5.4	5.6	5.7	-	5.8	5.9	6.1	-	6.1	6.2	6.5	-	6.1	6.2	6.5	-	6.1	6.2	6.5	-																
525	Hi PR	139	150	158	-	156	168	177	-	177	191	202	-	202	217	230	-	227	245	258	-	251	270	285	-	251	270	285	-	251	270	285	-																
	Lo PR	62	66	72	-	66	70	76	-	68	73	79	-	72	76	83	-	75	80	88	-	78	83	91	-	78	83	91	-	78	83	91	-																
	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-	12.9	13.4	14.7	-	12.9	13.4	14.7	-																
	S/T	0.69	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-																
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-	18	15	12	-																
75	675	kW	1.16	1.19	1.22	-	1.25	1.28	1.31	-	1.32	1.35	1.39	-	1.39	1.42	1.46	-	1.45	1.48	1.52	-	1.50	1.53	1.58	-	1.50	1.53	1.58	-	1.50	1.53	1.58	-															
		Amps	4.2	4.3	4.5	-	4.6	4.7	4.8	-	5.0	5.1	5.2	-	5.3	5.4	5.6	-	5.6	5.7	5.9	-	5.9	6.1	6.3	-	5.9	6.1	6.3	-	5.9	6.1	6.3	-															
		Hi PR	135	145	153	-	151	163	172	-	172	185	195	-	196	211	223	-	220	237	250	-	244	262	277	-	244	262	277	-	244	262	277	-															
		Lo PR	60	64	70	-	64	68	74	-	66	71	77	-	70	74	81	-	73	78	85	-	76	80	88	-	76	80	88	-	76	80	88	-															
		MBh	17.94	18.47	19.99	21.45	17.52	18.04	19.53	20.96	17.10	17.61	19.06	20.46	16.69	17.2	18.60	19.96	15.85	16.32	17.67	18.96	14.68	15.12	16.36	17.56	14.68	15.12	16.36	17.56	14.68	15.12	16.36	17.56															
	600	S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.97	0.87	0.66	0.42	0.97	0.87	0.66	0.42	0.97	0.87	0.66	0.42															
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	19	18	15	10	19	18	15	10															
		kW	1.21	1.23	1.27	1.31	1.30	1.33	1.37	1.41	1.38	1.41	1.45	1.50	1.45	1.48	1.53	1.58	1.51	1.54	1.59	1.64	1.56	1.59	1.64	1.70	1.56	1.59	1.64	1.70	1.56	1.59	1.64	1.70															
		Amps	4.4	4.5	4.7	4.8	4.8	4.9	5.0	5.2	5.2	5.3	5.5	5.7	5.5	5.7	5.8	6.1	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	6.2	6.4	6.6	6.8	6.2	6.4	6.6	6.8															
		Hi PR	142	153	161	168	159	171	181	189	181	195	206	214	206	222	234	244	232	249	263	275	256	276	291	304	256	276	291	304	256	276	291	304															
525	Lo PR	64	68	74	79	67	71	78	83	70	74	81	86	73	78	85	91	77	82	89	95	80	85	92	98	77	82	89	95	80	85	92	98																
	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1	14.3	14.7	15.9	17.1	14.3	14.7	15.9	17.1																
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40	0.93	0.83	0.63	0.40	0.93	0.83	0.63	0.40																
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	11	22	20	16	11	20	19	15	11	20	19	15	11	20	19	15	11																
	kW	1.20	1.23	1.26	1.30	1.29	1.32	1.36	1.40	1.37	1.40	1.44	1.49	1.44	1.47	1.51	1.56	1.49	1.53	1.58	1.63	1.55	1.58	1.63	1.68	1.55	1.58	1.63	1.68	1.55	1.58	1.63	1.68																
600	Amps	4.4	4.5	4.6	4.8	4.7	4.8	5.0	5.2	5.1	5.3	5.4	5.6	5.5	5.6	5.8	6.0	5.8	6.0	6.2	6.4	6.2	6.3	6.5	6.8	6.2	6.3	6.5	6.8	6.2	6.3	6.5	6.8																
	Hi PR	140	151	160	166	158	170	179	187	179	193	204	212	204	220	232	242	230	247	261	272	254	273	288	301	254	273	288	301	254	273	288	301																
	Lo PR	63	67	73	78	67	71	77	82	69	74	80	86	73	77	84	90	76	81	88	94	79	84	91	97	79	84	91	97	79	84	91	97																
	MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7	13.2	13.5	14.7	15.7	13.2	13.5	14.7	15.7																
	S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39																
525	ΔT	22	20	17	11	22	20	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11	21	19	16	11	21	19	16	11																
	kW	1.17	1.20	1.23	1.27	1.26	1.29	1.32	1.37	1.33	1.36	1.41	1.45	1.40	1.43	1.48	1.52	1.46	1.49	1.54	1.59	1.51	1.54	1.59	1.64	1.51	1.54	1.59	1.64	1.51	1.54	1.59	1.64																
	Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.0	5.0	5.1	5.3	5.5	5.3	5.5	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.1	6.3	6.6	6.0	6																						

EXPANDED COOLING DATA — GSH140181A* / CA*F3131B6A*+TXV / MBR800** -1 (CONT.)

IDB*		Outdoor Ambient Temperature																																																				
		65°F								75°F								85°F								95°F								105°F								115°F												
		Entering Indoor Wet Bulb Temperature																																																				
Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																						
80	MBh	18.26	18.65	19.93	21.31	17.83	18.22	19.47	20.81	17.41	17.79	19.00	20.31	16.98	17.35	18.54	19.82	16.13	16.49	17.61	18.83	14.94	15.27	16.32	17.44	10.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61					
	S/T	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	1.00	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61				
	ΔT	23	22	19	15	23	22	20	16	24	22	20	16	23	23	20	16	22	22	19	16	20	21	18	14	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15					
	kW	1.22	1.24	1.28	1.32	1.31	1.34	1.38	1.42	1.39	1.42	1.46	1.51	1.46	1.49	1.54	1.59	1.52	1.55	1.60	1.65	1.57	1.61	1.66	1.71	1.45	1.48	1.51	1.54	1.57	1.60	1.63	1.66	1.69	1.72	1.75	1.78	1.81	1.84	1.87	1.90	1.93	1.96	1.99	2.02	2.05	2.08	2.11						
	Amps	4.5	4.6	4.7	4.9	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.4	6.6	6.9	5.9	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5	7.7	7.9	8.1	8.3	8.5	8.7	8.9	9.1	9.3	9.5	9.7	9.9	10.1	10.3						
	Hi PR	143	154	163	170	161	173	183	190	183	197	208	217	208	224	237	247	234	252	266	278	259	278	294	307	245	264	283	302	321	340	359	378	397	416	435	454	473	492	511	530	549	568	587	606	625	644	663						
	Lo PR	64	68	75	79	68	72	79	84	71	75	82	87	74	79	86	92	78	83	90	96	80	85	93	99	64	68	75	79	68	72	79	84	71	75	82	87	74	79	86	92	78	83	90	96	80	85	93	99	64	68	75	79	
	MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	10.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.54	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58	1.00	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	21	16	24	23	20	16	22	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15					
kW	1.21	1.23	1.27	1.31	1.30	1.33	1.37	1.41	1.38	1.41	1.45	1.50	1.45	1.48	1.53	1.58	1.51	1.54	1.59	1.64	1.56	1.59	1.64	1.70	1.45	1.48	1.51	1.54	1.57	1.60	1.63	1.66	1.69	1.72	1.75	1.78	1.81	1.84	1.87	1.90	1.93	1.96	1.99	2.02	2.05	2.08	2.11							
Amps	4.4	4.5	4.7	4.8	4.8	4.9	5.0	5.2	5.2	5.3	5.5	5.7	5.5	5.7	5.8	6.1	5.9	6.0	6.2	6.4	6.2	6.4	6.6	6.8	5.9	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5	7.7	7.9	8.1	8.3	8.5	8.7	8.9	9.1	9.3	9.5	9.7	9.9	10.1	10.3							
Hi PR	142	153	161	168	159	171	181	189	181	195	206	214	206	222	234	244	232	250	263	275	256	276	291	304	245	264	283	302	321	340	359	378	397	416	435	454	473	492	511	530	549	568	587	606	625	644	663							
Lo PR	64	68	74	79	67	71	78	83	70	74	81	86	73	78	85	91	77	82	89	95	80	85	92	98	64	68	74	79	67	71	78	83	70	74	81	86	73	78	85	91	77	82	89	95	80	85	92	98	64	68	74	79		
MBh	16.4	16.7	17.9	19.1	16.0	16.3	17.4	18.6	15.6	15.9	17.0	18.2	15.2	15.6	16.6	17.8	14.5	14.8	15.8	16.9	13.4	13.7	14.6	15.6	10.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61		
S/T	0.86	0.80	0.65	0.49	0.89	0.83	0.68	0.51	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.98	0.91	0.74	0.56	1.00	0.96	0.78	0.58	1.00	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61	
ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15						
kW	1.18	1.21	1.24	1.28	1.27	1.30	1.33	1.38	1.35	1.37	1.42	1.46	1.41	1.44	1.49	1.54	1.47	1.50	1.55	1.60	1.52	1.55	1.60	1.66	1.45	1.48	1.51	1.54	1.57	1.60	1.63	1.66	1.69	1.72	1.75	1.78	1.81	1.84	1.87	1.90	1.93	1.96	1.99	2.02	2.05	2.08	2.11							
Amps	4.3	4.4	4.6	4.7	4.7	4.8	4.9	5.1	5.0	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.8	6.0	6.3	6.0	6.2	6.4	6.6	5.9	6.1	6.3	6.5	6.7	6.9	7.1	7.3	7.5	7.7	7.9	8.1	8.3	8.5	8.7	8.9	9.1	9.3	9.5	9.7	9.9	10.1	10.3							
Hi PR	138	148	156	163	154	166	175	183	176	189	199	208	200	215	227	237	225	242	256	267	248	267	282	295	245	264	283	302	321	340	359	378	397	416	435	454	473	492	511	530	549	568	587	606	625	644	663							
Lo PR	62	66	72	76	65	69	76	81	68	72	79	84	71	76	83	88	75	79	87	92	77	82	90	95	62	66	72	76	65	69	76	81	68	72	79	84	71	76	83	88	75	79	87	92	77	82	90	95						
85	MBh	18.58	18.93	19.83	21.16	18.14	18.49	19.37	20.66	17.71	18.05	18.91	20.17	17.28	17.61	18.45	19.68	16.42	16.73	17.52	18.70	15.21	15.50	16.23	17.32	10.93	0.98	0.81	0.66	1.00	0.98	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	1.00	1.00	0.98	0.79					
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79	1.00	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	25	24	23	20	25	25	23	20	24	25	23	20	24	24	23	20	22	23	23	20	21	21	22	19	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15					
	kW	1.23	1.25	1.29	1.33	1.32	1.35	1.39	1.43	1.40	1.43	1.48	1.52	1.47	1.50	1.55	1.60	1.53	1.56	1.62	1.67	1.58	1.62	1.67	1.73	1.45	1.48	1.51	1.54	1.57	1.60	1.63	1.66	1.69	1.72	1.75	1.78	1.81	1.84	1.87	1.90	1.93	1.96	1.99	2.02	2.05	2.08	2.11						
	Amps	4.5	4.6	4.8	4.9	4.9	5.0	5.1	5.3	5.3	5.4	5.6	5.8																																									

EXPANDED COOLING DATA — GSH140241A* / CA*F3636B6A* +TXV / MBR800**1

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	950	MBh	23.2	24.0	26.3	-	22.6	23.5	25.7	-	22.1	22.9	25.1	-	21.6	22.3	24.5	-	20.5	21.2	23.3	-	19.0	19.7	21.5	-											
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-											
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-											
		kW	1.62	1.65	1.70	-	1.73	1.77	1.82	-	1.84	1.87	1.93	-	1.93	1.97	2.03	-	2.00	2.04	2.11	-	2.07	2.11	2.18	-											
		Amps	10.1	10.2	10.4	-	10.5	10.7	10.9	-	11.1	11.2	11.4	-	11.5	11.7	11.9	-	11.9	12.1	12.4	-	12.4	12.6	12.8	-											
		Hi PR	134	145	153	-	151	162	171	-	172	185	195	-	195	210	222	-	220	237	250	-	243	261	276	-											
70	850	Lo PR	64	68	75	-	68	72	79	-	71	75	82	-	74	79	86	-	78	83	90	-	80	85	93	-											
		MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.2	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-											
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.64	0.45	-	0.80	0.66	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-											
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-											
		kW	1.61	1.64	1.69	-	1.73	1.76	1.81	-	1.83	1.86	1.92	-	1.92	1.95	2.01	-	1.99	2.03	2.10	-	2.06	2.10	2.16	-											
		Amps	10.1	10.2	10.4	-	10.5	10.6	10.8	-	11.0	11.2	11.4	-	11.5	11.6	11.9	-	11.9	12.1	12.3	-	12.3	12.5	12.8	-											
750	750	Hi PR	134	144	152	-	150	161	170	-	170	183	194	-	194	209	221	-	218	235	248	-	241	260	274	-											
		Lo PR	64	68	74	-	67	72	78	-	70	75	81	-	74	78	85	-	77	82	90	-	80	85	93	-											
		MBh	21.7	22.5	24.6	-	21.2	22.0	24.1	-	20.7	21.4	23.5	-	20.2	20.9	22.9	-	19.2	19.9	21.8	-	17.8	18.4	20.2	-											
		S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-											
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-											
		kW	1.59	1.62	1.67	-	1.70	1.73	1.79	-	1.80	1.84	1.89	-	1.89	1.92	1.98	-	1.96	2.00	2.06	-	2.02	2.07	2.13	-											
		Amps	10.0	10.1	10.3	-	10.4	10.5	10.7	-	10.9	11.1	11.3	-	11.3	11.5	11.7	-	11.8	11.9	12.2	-	12.2	12.4	12.6	-											
		Hi PR	131	141	149	-	147	158	167	-	167	180	190	-	190	205	216	-	214	230	243	-	236	254	269	-											
		Lo PR	63	67	73	-	66	70	77	-	69	73	80	-	72	77	84	-	76	80	88	-	78	83	91	-											

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
950	MBh	23.57	24.27	26.27	28.19	23.02	23.70	25.65	27.53	22.47	23.14	25.04	26.88	21.92	22.57	24.43	26.22	20.83	21.44	23.21	24.91	19.29	19.86	21.50	23.08	19.29	19.86	21.50	23.08	19.29	19.86	21.50	23.08	19.29	19.86	21.50	23.08
	S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.94	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43	0.99	0.88	0.67	0.43	0.99	0.88	0.67	0.43	0.99	0.88	0.67	0.43
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	15	10	10	18	15	10	10	18	15	10	10	18	15	10	10
	kW	1.63	1.66	1.71	1.76	1.75	1.78	1.84	1.89	1.85	1.89	1.95	2.01	1.94	1.98	2.04	2.11	2.02	2.06	2.12	2.19	2.08	2.13	2.19	2.26	2.08	2.13	2.19	2.26	2.08	2.13	2.19	2.26	2.08	2.13	2.19	2.26
	Amps	10.2	10.3	10.5	10.7	10.6	10.7	10.9	11.2	11.1	11.3	11.5	11.8	11.6	11.7	12.0	12.3	12.0	12.2	12.5	12.8	12.5	12.7	12.9	13.2	12.5	12.7	12.9	13.2	12.5	12.7	12.9	13.2	12.5	12.7	12.9	13.2
	Hi PR	136	146	154	161	152	164	173	181	173	187	197	205	197	212	224	234	222	239	252	263	245	264	279	291	245	264	279	291	245	264	279	291	245	264	279	291
850	Lo PR	65	69	75	80	69	73	80	85	71	76	83	88	75	80	87	93	78	83	91	97	81	86	94	100	81	86	94	100	81	86	94	100	81	86	94	100
	MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.1	22.8	24.7	26.5	21.6	22.2	24.1	25.8	20.5	21.1	22.9	24.5	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7
	S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	19	18	15	10	19	18	15	10	19	18	15	10
	kW	1.62	1.66	1.70	1.75	1.74	1.77	1.83	1.88	1.84	1.88	1.94	2.00	1.93	1.97	2.03	2.09	2.01	2.05	2.11	2.18	2.07	2.12	2.18	2.25	2.07	2.12	2.18	2.25	2.07	2.12	2.18	2.25	2.07	2.12	2.18	2.25
	Amps	10.1	10.2	10.4	10.6	10.6	10.7	10.9	11.1	11.1	11.2	11.5	11.7	11.5	11.7	11.9	12.2	12.0	12.2	12.4	12.7	12.4	12.6	12.9	13.2	12.4	12.6	12.9	13.2	12.4	12.6	12.9	13.2	12.4	12.6	12.9	13.2
750	Hi PR	135	145	153	160	151	163	172	179	172	185	196	204	196	211	223	232	221	237	251	261	244	262	277	289	244	262	277	289	244	262	277	289	244	262	277	289
	Lo PR	64	69	75	80	68	72	79	84	71	75	82	88	74	79	86	92	78	83	90	96	81	86	94	100	81	86	94	100	81	86	94	100	81	86	94	100
	MBh	22.1	22.7	24.6	26.4	21.5	22.2	24.0	25.8	21.0	21.7	23.4	25.2	20.5	21.13	22.9	24.5	19.5	20.1	21.7	23.3	18.1	18.6	20.1	21.6	18.1	18.6	20.1	21.6	18.1	18.6	20.1	21.6	18.1	18.6	20.1	21.6
	S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.40	0.91	0.81	0.61	0.40	0.91	0.81	0.61	0.40	0.91	0.81	0.61	0.40
	ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10
	kW	1.60	1.63	1.68	1.73	1.71	1.75	1.80	1.85	1.81	1.85	1.91	1.96	1.90	1.94	2.00	2.06	1.98	2.02	2.08	2.14	2.04	2.08	2.15	2.22	2.04	2.08	2.15	2.22	2.04	2.08	2.15	2.22	2.04	2.08	2.15	2.22
750	Amps	10.0	10.1	10.3	10.5	10.5	10.6	10.8	11.0	11.0	11.1	11.3	11.6	11.4	11.6	11.8	12.1	11.8	12.0	12.3	12.6	12.3	12.5	12.7	13.0	12.3	12.5	12.7	13.0	12.3	12.5	12.7	13.0	12.3	12.5	12.7	13.0
	Hi PR	132	142	150	157	148	160	169	176	169	182	192	200	192	207	218	228	216	233	246	256	239	257	271	283	239	257	271	283	239	257	271	283	239	257	271	283
	Lo PR	63	67	73	78	67	71	77	83	69	74	81	86	73	77	85	90	76	81	89	94	79	84	92	98	79	84	92	98	79	84	92	98	79	84	92	98

EXPANDED COOLING DATA — GSH140241A* / CA*F3636B6A* +TXV / MBR800**1 (CONT.)

		Outdoor Ambient Temperature																													
		65°F					75°F					85°F					95°F					105°F					115°F				
IDB*	Airflow	Entering Indoor Wet Bulb Temperature																													
80	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
		23.99	24.51	26.19	27.99	23.43	23.94	25.58	27.34	22.87	23.37	24.97	26.69	22.31	22.80	24.36	26.04	21.20	21.66	23.14	24.74	19.84	20.06	21.44	22.92						
	S/T	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62						
	ΔT	22	21	18	15	22	21	19	15	22	21	19	15	22	21	19	15	21	21	18	15	19	19	17	14						
	kW	1.64	1.68	1.73	1.78	1.76	1.80	1.85	1.91	1.86	1.90	1.96	2.02	1.96	2.00	2.06	2.12	2.03	2.08	2.14	2.21	2.10	2.14	2.21	2.28						
	Amps	10.2	10.3	10.5	10.7	10.7	10.8	11.0	11.2	11.2	11.3	11.6	11.8	11.6	11.8	12.0	12.3	12.1	12.3	12.5	12.8	12.5	12.7	13.0	13.3						
	Hi PR	137	148	156	163	154	166	175	182	175	188	199	208	199	215	227	236	224	241	255	266	248	267	282	294						
	Lo PR	66	70	76	81	69	74	80	86	72	77	84	89	76	80	88	94	79	84	92	98	82	87	95	101						
	MBh	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.3	22.8	24.4	19.3	19.8	21.1	22.6						
	S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.72	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.97	0.79	0.59						
ΔT	23	22	19	15	23	22	20	16	23	22	20	16	24	23	20	16	23	22	20	15	21	21	18	14							
850	kW	1.64	1.67	1.72	1.77	1.75	1.79	1.84	1.90	1.85	1.89	1.95	2.01	1.95	1.99	2.05	2.11	2.02	2.06	2.13	2.20	2.09	2.13	2.20	2.27						
	Amps	10.2	10.3	10.5	10.7	10.6	10.8	11.0	11.2	11.1	11.3	11.5	11.8	11.6	11.8	12.0	12.3	12.0	12.2	12.5	12.8	12.5	12.7	13.0	13.3						
	Hi PR	136	147	155	161	153	165	174	181	174	187	198	206	198	213	225	235	223	240	253	264	246	265	280	292						
	Lo PR	65	69	76	81	69	73	80	85	71	76	83	88	75	80	87	93	79	84	91	97	81	87	95	101						
	MBh	22.5	22.9	24.5	26.2	21.9	22.4	23.9	25.6	21.4	21.9	23.4	25.0	20.9	21.3	22.8	24.4	19.8	20.3	21.7	23.2	18.4	18.8	20.1	21.4						
	S/T	0.87	0.81	0.66	0.49	0.90	0.84	0.69	0.51	0.92	0.86	0.70	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	0.99	0.93	0.76	0.57						
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15						
	kW	1.61	1.64	1.69	1.74	1.73	1.76	1.81	1.87	1.83	1.86	1.92	1.98	1.92	1.95	2.01	2.08	1.99	2.03	2.10	2.16	2.06	2.10	2.16	2.23						
	Amps	10.1	10.2	10.4	10.6	10.5	10.6	10.8	11.1	11.0	11.2	11.4	11.6	11.5	11.6	11.9	12.1	11.9	12.1	12.3	12.6	12.3	12.5	12.8	13.1						
	Hi PR	134	144	152	158	150	161	170	178	170	183	194	202	194	209	221	230	218	235	248	259	241	260	274	286						
Lo PR	64	68	74	79	67	72	78	83	70	75	81	87	74	78	85	91	77	82	90	95	80	85	93	99							

		Outdoor Ambient Temperature																															
		65°F					75°F					85°F					95°F					105°F					115°F						
IDB*	Airflow	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75		
950	MBh	24.41	24.88	26.06	27.80	29.67	23.84	24.30	25.45	27.15	28.99	23.27	23.72	24.84	26.51	28.35	22.70	23.14	24.24	25.86	27.61	21.57	21.99	23.03	24.57	19.98	20.37	21.33	22.76	24.20	25.63	27.06	28.49
	S/T	0.99	0.96	0.86	0.70	0.54	1.00	0.99	0.89	0.73	0.57	1.00	1.00	0.92	0.74	0.58	1.00	1.00	0.95	0.77	0.60	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80	1.00	1.00	0.99	0.80
	ΔT	23	23	22	19	16	23	23	22	19	16	22	22	22	19	16	22	22	22	19	16	21	21	21	22	19	19	20	20	18	15	12	10
	kW	1.66	1.69	1.74	1.79	1.84	1.77	1.81	1.86	1.92	1.97	1.88	1.92	1.98	2.04	2.09	1.97	2.01	2.07	2.14	2.20	2.05	2.09	2.16	2.23	2.12	2.16	2.23	2.30	2.37	2.44	2.51	2.58
	Amps	10.3	10.4	10.6	10.8	11.0	10.7	10.9	11.1	11.3	11.5	11.2	11.4	11.6	11.9	12.1	11.7	11.9	12.1	12.4	12.6	12.8	13.0	13.2	13.5	12.6	12.8	13.1	13.4	13.7	14.0	14.3	14.6
850	Hi PR	139	149	157	164	170	155	167	177	184	190	177	190	201	210	217	201	217	229	239	247	244	258	269	280	250	269	285	297	309	321	333	345
	Lo PR	66	70	77	82	87	70	74	81	87	92	73	77	84	90	95	76	81	89	94	99	80	85	93	99	83	88	96	102	108	114	120	126
	MBh	24.0	24.5	25.7	27.4	29.2	23.5	23.9	25.1	26.8	28.5	22.9	23.4	24.5	26.1	27.7	22.4	22.8	23.9	25.5	27.1	21.2	21.7	22.7	24.2	19.7	20.1	21.0	22.4	23.9	25.4	26.9	28.4
	S/T	0.95	0.92	0.83	0.67	0.51	0.98	0.95	0.86	0.69	0.53	1.00	0.97	0.88	0.71	0.55	1.00	1.00	0.91	0.74	0.57	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77
	ΔT	25	24	23	20	17	25	25	23	20	17	24	25	23	20	17	24	25	23	20	17	23	23	23	20	21	22	22	19	16	13	10	8
750	kW	1.65	1.68	1.73	1.78	1.83	1.77	1.80	1.85	1.91	1.96	1.87	1.91	1.97	2.03	2.08	1.96	2.00	2.06	2.13	2.19	2.04	2.08	2.15	2.21	2.11	2.15	2.22	2.29	2.36	2.43	2.50	2.57
	Amps	10.2	10.4	10.5	10.8	11.0	10.7	10.8	11.0	11.3	11.5	11.2	11.4	11.6	11.8	12.0	11.7	11.8	12.1	12.4	12.6	12.8	13.0	13.2	13.5	12.6	12.8	13.0	13.4	13.7	14.0	14.3	14.6
	Hi PR	138	148	156	163	169	154	166	175	183	189	176	189	200	208	215	200	215	227	237	245	242	256	267	279	249	268	283	295	307	319	331	343
	Lo PR	66	70	76	81	86	69	74	81	86	92	72	77	84	89	94	76	81	88	94	99	79	84	92	98	82	87	95	102	109	116	123	130
	MBh	22.8	23.3	24.4	26.0	27.6	22.3	22.7	23.8	25.4	27.0	21.8	22.2	23.3	24.8	26.3	21.2	21.7	22.7	24.2	25.7	20.2	20.6	21.6	23.0	18.7	19.1	20.0	21.3	22.8	24.3	25.8	27.3
85	S/T	0.91	0.88	0.79	0.64	0.49	0.94	0.91	0.82	0.67	0.51	0.97	0.93	0.84	0.68	0.52	1.00	0.96	0.87	0.70	0.54	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74	1.00	1.00	0.91	0.74
	ΔT	25	25	24	20	17	26	25	24	21	18	26	25	24	21	18	26	26	24	21	18	25	25	24	21	23	23	22	19	16	13	10	
	kW	1.62	1.66	1.70	1.75	1.79	1.74	1.77	1.83	1.88	1.93	1.84	1.88	1.93	1.99	2.04	1.93	1.97	2.03	2.09	2.14	2.05	2.11	2.18	2.07	2.12	2.18	2.25	2.32	2.39	2.46	2.53	2.60
	Amps	10.1	10.2	10.4	10.6	10.8	10.6	10.7	10.9	11.1	11.3	11.1	11.2	11.5	11.7	11.9	12.0	11.9	12.2	12.4	12.6	12.8	13.0	13.2	13.4	12.4	12.6	12.9	13.2	13.5	13.8	14.1	14.4
	Hi PR	135	145	153	160	167	151	163	172	179	187	172	185	196	204	212	196	211	223	232	241	237	251	261	271	244	262	277	289	300	311	322	333
Lo PR	64	69	75	80	85	68	72	79	84	90	71	75	82	88	94	74	79	86	92	97	78	83	90	96	81	86	94	100	106	112	118	124	

EXPANDED COOLING DATA — GSH140301A* / CA*F3636B6A* + TXV / MBR1200** -1

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70	MBh	27.4	28.4	31.2	-	26.8	27.8	30.4	-	26.2	27.1	29.7	-	25.5	26.5	29.0	-	24.2	25.1	27.5	-	22.5	23.3	25.5	-	22.5	23.3	25.5	-	22.5	23.3	25.5	-																
	S/T	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.85	0.71	0.49	-	0.88	0.73	0.51	-	0.91	0.76	0.53	-	0.92	0.77	0.53	-	0.92	0.77	0.53	-	0.92	0.77	0.53	-																
	ΔT	17	14	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	14	11	-	16	14	10	-	16	14	10	-	16	14	10	-																
	1214	kW	1.84	1.87	1.93	-	1.97	2.00	2.06	-	2.08	2.12	2.18	-	2.18	2.22	2.29	-	2.26	2.31	2.38	-	2.33	2.38	2.46	-	2.33	2.38	2.46	-	2.33	2.38	2.46	-															
	Amps	6.4	6.6	6.8	-	6.9	7.1	7.3	-	7.5	7.7	7.9	-	8.0	8.2	8.4	-	8.5	8.7	9.0	-	9.0	9.2	9.5	-	9.0	9.2	9.5	-	9.0	9.2	9.5	-																
	Hi PR	137	148	156	-	154	166	175	-	175	188	199	-	199	215	227	-	224	241	255	-	248	267	282	-	248	267	282	-	248	267	282	-																
	Lo PR	64	68	75	-	68	72	79	-	70	75	82	-	74	79	86	-	78	83	90	-	80	85	93	-	80	85	93	-	80	85	93	-																
	MBh	26.6	27.6	30.3	-	26.0	27.0	29.5	-	25.4	26.3	28.8	-	24.8	25.7	28.1	-	23.5	24.4	26.7	-	21.8	22.6	24.8	-	21.8	22.6	24.8	-	21.8	22.6	24.8	-																
	S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-	0.88	0.73	0.51	-	0.88	0.73	0.51	-																
	ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	17	15	11	-	16	14	11	-	16	14	11	-	16	14	11	-																
945	1080	kW	1.82	1.86	1.91	-	1.95	1.99	2.05	-	2.06	2.10	2.17	-	2.16	2.20	2.27	-	2.24	2.29	2.36	-	2.32	2.36	2.44	-	2.32	2.36	2.44	-	2.32	2.36	2.44	-															
	Amps	6.4	6.5	6.7	-	6.8	7.0	7.2	-	7.4	7.6	7.8	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-	8.9	9.1	9.4	-	8.9	9.1	9.4	-	8.9	9.1	9.4	-																
	Hi PR	136	146	154	-	152	164	173	-	173	187	197	-	197	212	224	-	222	239	252	-	245	264	279	-	245	264	279	-	245	264	279	-																
	Lo PR	64	68	74	-	67	71	78	-	70	74	81	-	73	78	85	-	77	82	89	-	79	85	92	-	79	85	92	-	79	85	92	-																
	MBh	24.6	25.5	27.9	-	24.0	24.9	27.3	-	23.4	24.3	26.6	-	22.9	23.7	26.0	-	21.7	22.5	24.7	-	20.1	20.9	22.9	-	20.1	20.9	22.9	-	20.1	20.9	22.9	-																
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-																
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-	17	14	11	-																
	945	kW	1.79	1.82	1.87	-	1.91	1.94	2.00	-	2.02	2.06	2.12	-	2.11	2.15	2.22	-	2.19	2.24	2.30	-	2.26	2.31	2.38	-	2.26	2.31	2.38	-	2.26	2.31	2.38	-															
	Amps	6.2	6.3	6.5	-	6.7	6.8	7.0	-	7.2	7.4	7.6	-	7.7	7.9	8.1	-	8.2	8.4	8.6	-	8.6	8.8	9.1	-	8.6	8.8	9.1	-	8.6	8.8	9.1	-																
	Hi PR	132	142	150	-	148	159	168	-	168	181	191	-	191	206	218	-	215	232	245	-	238	256	270	-	238	256	270	-	238	256	270	-																
Lo PR	62	66	72	-	65	69	76	-	68	72	79	-	71	76	83	-	74	79	87	-	77	82	89	-	77	82	89	-	77	82	89	-																	
75	MBh	27.90	28.73	31.10	33.37	27.25	28.06	30.37	32.60	26.60	27.39	29.65	31.82	25.96	26.72	28.93	31.05	24.66	25.39	27.48	29.49	22.84	23.52	25.46	27.32	22.84	23.52	25.46	27.32	22.84	23.52	25.46	27.32																
	S/T	0.91	0.81	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	1.00	0.89	0.68	0.44	1.00	0.93	0.70	0.45	1.00	0.94	0.71	0.46	1.00	0.94	0.71	0.46	1.00	0.94	0.71	0.46																
	ΔT	19	18	15	10	19	18	15	10	19	18	15	10	20	18	15	10	19	18	15	10	17	17	14	9	17	17	14	9	17	17	14	9																
	1214	kW	1.85	1.89	1.94	2.00	1.98	2.02	2.08	2.14	2.09	2.14	2.20	2.27	2.19	2.24	2.31	2.38	2.28	2.33	2.40	2.47	2.35	2.40	2.48	2.55	2.35	2.40	2.48	2.55	2.35	2.40	2.48	2.55															
	Amps	6.5	6.6	6.8	7.1	7.0	7.1	7.4	7.6	7.5	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.8	9.0	9.4	9.0	9.3	9.6	9.9	9.0	9.3	9.6	9.9	9.0	9.3	9.6	9.9																
	Hi PR	139	149	157	164	155	167	177	184	177	190	201	210	201	217	229	239	227	244	257	269	250	269	284	297	250	269	284	297	250	269	284	297																
	Lo PR	65	69	75	80	68	73	80	85	71	76	83	88	75	80	87	92	78	83	91	97	81	86	94	100	81	86	94	100	81	86	94	100																
	MBh	27.1	27.9	30.2	32.4	26.5	27.2	29.5	31.6	25.8	26.6	28.8	30.9	25.2	25.9	28.1	30.1	23.9	24.6	26.7	28.6	22.2	22.8	24.7	26.5	22.2	22.8	24.7	26.5	22.2	22.8	24.7	26.5																
	S/T	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.92	0.83	0.62	0.40	0.95	0.85	0.64	0.41	0.99	0.88	0.67	0.43	1.00	0.89	0.67	0.43	1.00	0.89	0.67	0.43	1.00	0.89	0.67	0.43																
	ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	19	15	11	19	17	14	10	19	17	14	10	19	17	14	10																
945	1080	kW	1.84	1.87	1.93	1.98	1.97	2.00	2.06	2.12	2.08	2.12	2.18	2.25	2.18	2.22	2.29	2.36	2.26	2.31	2.38	2.45	2.33	2.38	2.46	2.53	2.33	2.38	2.46	2.53	2.33	2.38	2.46	2.53															
	Amps	6.4	6.6	6.8	7.0	6.9	7.1	7.3	7.6	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.8	9.0	9.2	9.5	9.8	9.0	9.2	9.5	9.8																
	Hi PR	137	148	156	163	154	166	175	182	175	188	199	208	199	215	227	236	224	241	255	266	248	267	282	294	248	267	282	294	248	267	282	294																
	Lo PR	64	68	75	79	68	72	79	84	70	75	82	87	74	79	86	92	78	83	90	96	80	85	93	99	80	85	93	99	80	85	93	99																
	MBh	25.0	25.7	27.9	29.9	24.4	25.1	27.2	29.2	23.8	24.5	26.6	28.5	23.3	23.9	25.9	27.8	22.1	22.8	24.6	26.4	20.5	21.1	22.8	24.5	20.5	21.1	22.8	24.5	20.5	21.1	22.8	24.5																
	S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42																
	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	15	11	19	18	14	10	19	18	14	10	19	18	14	10																
	945	kW	1.80	1.83	1.88	1.94	1.92	1.96	2.02	2.08	2.03	2.07	2.13	2.20	2.13	2.17	2.24	2.30	2.21	2.25	2.32	2.40	2.28	2.33	2.40	2.47	2.28	2.33	2.40	2.47	2.28	2.33	2.40	2.47															
	Amps	6.2	6.4	6.6	6.8	6.7	6.9	7.1	7.4	7.3	7.5	7.7	8.0	7.8	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6	8.7	8.9	9.2	9																				

EXPANDED COOLING DATA — GSH140301A* / CA*F3636B6A* + TXV / MBR1200** -1 (CONT.)

		Outdoor Ambient Temperature																115°F							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1214	MBh	28.40	29.02	31.00	33.14	27.74	28.34	30.28	32.37	27.08	27.67	29.56	31.60	26.42	26.99	28.84	30.83	25.10	25.64	27.40	29.29	23.25	23.75	25.38	27.13
	S/T	1.00	0.94	0.76	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.84	0.63	1.00	1.00	0.87	0.65	1.00	1.00	0.88	0.65
	ΔT	21	21	18	14	20	21	18	14	20	21	18	14	20	20	18	15	19	19	18	14	18	18	17	13
	kW	1.86	1.90	1.95	2.01	1.99	2.03	2.09	2.16	2.11	2.15	2.22	2.28	2.21	2.26	2.32	2.40	2.30	2.34	2.42	2.49	2.37	2.42	2.50	2.57
	Amps	6.5	6.7	6.9	7.1	7.0	7.2	7.4	7.7	7.6	7.8	8.0	8.3	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	9.1	9.3	9.6	10.0
1080	HiPR	140	151	159	166	157	169	178	186	179	192	203	212	203	219	231	241	229	246	260	271	253	272	287	300
	Lo PR	65	70	76	81	69	74	80	86	72	76	84	89	76	80	88	93	79	84	92	98	82	87	95	101
	MBh	27.6	28.2	30.1	32.2	26.9	27.5	29.4	31.4	26.3	26.9	28.7	30.7	25.6	26.2	28.0	29.9	24.4	24.9	26.6	28.4	22.6	23.1	24.6	26.3
	S/T	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62
	ΔT	22	21	19	15	23	22	19	15	22	22	19	15	22	22	19	15	21	21	19	15	19	20	18	14
945	kW	1.85	1.89	1.94	2.00	1.98	2.02	2.08	2.14	2.09	2.14	2.20	2.27	2.19	2.24	2.31	2.38	2.28	2.33	2.40	2.47	2.35	2.40	2.48	2.55
	Amps	6.5	6.6	6.8	7.1	7.0	7.1	7.4	7.6	7.5	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.8	9.0	9.4	9.0	9.3	9.6	9.9
	HiPR	139	149	157	164	156	167	177	184	177	190	201	210	201	217	229	239	227	244	258	269	250	269	285	297
	Lo PR	65	69	75	80	68	73	80	85	71	76	83	88	75	80	87	92	78	83	91	97	81	86	94	100
	MBh	25.4	26.0	27.8	29.7	24.9	25.4	27.1	29.0	24.3	24.8	26.5	28.3	23.7	24.2	25.8	27.6	22.5	23.0	24.6	26.2	20.8	21.3	22.7	24.3

1214	MBh	28.89	29.45	30.85	32.91	28.22	28.77	30.13	32.14	27.55	28.08	29.41	31.38	26.88	27.40	28.70	30.61	25.53	26.03	27.26	29.08	23.65	24.11	25.25	26.94
	S/T	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.77	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.84	1.00	1.00	1.00	0.85
	ΔT	22	22	21	18	21	22	22	19	21	21	22	19	20	21	22	19	19	20	21	19	18	18	19	17
	kW	1.88	1.91	1.97	2.03	2.01	2.05	2.11	2.17	2.13	2.17	2.23	2.30	2.23	2.27	2.34	2.42	2.31	2.36	2.44	2.51	2.39	2.44	2.52	2.60
	Amps	6.6	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.5	9.2	9.4	9.7	10.1
1080	HiPR	141	152	161	168	159	171	180	188	180	194	205	214	205	221	234	244	231	249	263	274	255	275	290	303
	Lo PR	66	70	77	82	70	74	81	86	73	77	84	90	76	81	89	94	80	85	93	99	83	88	96	102
	MBh	28.1	28.6	29.9	32.0	27.4	27.9	29.3	31.2	26.7	27.3	28.6	30.5	26.1	26.6	27.9	29.7	24.8	25.3	26.5	28.2	23.0	23.4	24.5	26.2
	S/T	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.81
	ΔT	24	23	22	19	23	24	22	19	23	23	22	19	22	23	23	20	21	22	22	19	20	20	21	18
945	kW	1.86	1.90	1.95	2.01	1.99	2.03	2.09	2.16	2.11	2.15	2.22	2.28	2.21	2.26	2.32	2.40	2.30	2.34	2.42	2.49	2.37	2.42	2.50	2.57
	Amps	6.5	6.7	6.9	7.1	7.0	7.2	7.4	7.7	7.6	7.8	8.0	8.3	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5	9.1	9.3	9.6	10.0
	HiPR	140	151	159	166	157	169	178	186	179	192	203	212	203	219	231	241	229	246	260	271	253	272	287	300
	Lo PR	65	70	76	81	69	74	80	86	72	76	84	89	76	80	88	93	79	84	92	98	82	87	95	101
	MBh	25.9	26.4	27.6	29.5	25.3	25.8	27.0	28.8	24.7	25.2	26.4	28.1	24.1	24.6	25.7	27.4	22.9	23.3	24.4	26.1	21.2	21.6	22.6	24.1
945	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78
	ΔT	24	24	23	20	25	24	23	20	24	24	23	20	23	24	23	20	22	23	23	20	21	21	21	18
	kW	1.82	1.86	1.91	1.97	1.95	1.99	2.05	2.11	2.06	2.10	2.17	2.23	2.16	2.20	2.27	2.34	2.24	2.29	2.36	2.43	2.32	2.36	2.44	2.51
	Amps	6.4	6.5	6.7	6.9	6.8	7.0	7.2	7.5	7.4	7.6	7.8	8.1	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2	8.9	9.1	9.4	9.7
	HiPR	136	146	154	161	152	164	173	181	173	186	197	205	197	212	224	234	222	239	252	263	245	264	279	291
	Lo PR	64	68	74	79	67	71	78	83	70	74	81	86	73	78	85	91	77	82	89	95	79	84	92	98

Shaded area is ARI Rating Conditions IDB: Entering Indoor Dry Bulb Temperature kW= Total system power Amps = outdoor unit amps (comp. + fan)
 High and low pressures are measured at the liquid and suction service valves. Design Subcooling, 9 ± 3 °F @ the liquid service valve, ARI 95 test conditions

EXPANDED COOLING DATA — GSH140361A* / CA*F4860C6A* +TXV / MBR1600** -1

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70		MBh	33.9	35.1	38.5	-	33.1	34.3	37.6	-	32.3	33.5	36.7	-	31.5	32.7	35.8	-	30.0	31.1	34.0	-	27.8	28.8	31.5	-											
		S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-											
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-											
	1198	kW	2.32	2.37	2.44	-	2.49	2.54	2.61	-	2.63	2.69	2.77	-	2.76	2.82	2.91	-	2.87	2.93	3.02	-	2.96	3.03	3.12	-											
		Amps	8.6	8.8	9.1	-	9.3	9.5	9.8	-	10.0	10.3	10.6	-	10.7	10.9	11.3	-	11.3	11.6	12.0	-	12.0	12.3	12.6	-											
		Hi PR	138	148	157	-	155	167	176	-	176	189	200	-	201	216	228	-	226	243	256	-	249	268	283	-											
		Lo PR	63	67	73	-	66	71	77	-	69	73	80	-	72	77	84	-	76	81	88	-	78	83	91	-											
70		MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.6	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	26.9	27.9	30.6	-											
		S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-											
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-											
	1065	kW	2.31	2.35	2.42	-	2.47	2.52	2.59	-	2.61	2.67	2.75	-	2.74	2.80	2.88	-	2.85	2.91	3.00	-	2.94	3.00	3.10	-											
		Amps	8.5	8.7	9.0	-	9.2	9.4	9.7	-	9.9	10.2	10.5	-	10.6	10.8	11.2	-	11.2	11.5	11.9	-	11.9	12.1	12.5	-											
		Hi PR	137	147	155	-	153	165	174	-	174	188	198	-	199	214	226	-	223	240	254	-	247	266	280	-											
		Lo PR	62	66	72	-	66	70	76	-	68	73	79	-	72	76	83	-	75	80	87	-	78	83	90	-											
932		MBh	30.4	31.5	34.5	-	29.7	30.8	33.7	-	29.0	30.0	32.9	-	28.3	29.3	32.1	-	26.9	27.8	30.5	-	24.9	25.8	28.2	-											
		S/T	0.66	0.55	0.38	-	0.68	0.57	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.75	0.63	0.44	-											
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-											
	932	kW	2.26	2.30	2.37	-	2.41	2.46	2.53	-	2.55	2.61	2.68	-	2.68	2.73	2.82	-	2.78	2.84	2.93	-	2.87	2.93	3.02	-											
		Amps	8.3	8.5	8.8	-	9.0	9.2	9.4	-	9.7	9.9	10.2	-	10.3	10.5	10.9	-	10.9	11.2	11.5	-	11.5	11.8	12.2	-											
		Hi PR	132	143	151	-	149	160	169	-	169	182	192	-	193	207	219	-	217	233	246	-	239	258	272	-											
		Lo PR	60	64	70	-	64	68	74	-	66	70	77	-	69	74	81	-	73	77	85	-	75	80	87	-											

EXPANDED COOLING DATA — GSH140361A* / CA*F4860C6A* +TXV / MBR1600** -1 (CONT.)

		Outdoor Ambient Temperature																115°F							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	35.09	35.86	38.31	40.95	34.28	35.03	37.42	40.00	33.46	34.19	36.53	39.05	32.64	33.36	35.64	38.10	31.01	31.69	33.86	36.19	28.73	29.35	31.36	33.53
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.53	0.94	0.89	0.72	0.54	1.00	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.96	0.78	0.58
	DT	24	23	20	16	24	23	20	16	24	23	20	16	25	23	20	16	24	23	20	16	22	22	19	15
	kW	2.36	2.40	2.47	2.55	2.53	2.58	2.65	2.74	2.67	2.73	2.81	2.90	2.81	2.86	2.95	3.05	2.92	2.98	3.07	3.17	3.01	3.08	3.17	3.28
	Amps	8.8	9.0	9.2	9.6	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.1	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6	12.2	12.5	12.9	13.3
	Hi PR	141	151	160	167	158	170	179	187	180	193	204	213	205	220	233	242	230	248	262	273	254	274	289	301
	Lo PR	64	68	74	79	68	72	79	84	70	75	82	87	74	79	86	91	77	82	90	96	80	85	93	99
	MBh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.4	32.5
	S/T	0.85	0.79	0.65	0.48	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.97	0.91	0.74	0.56
	DT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	20	16
932	kW	2.34	2.39	2.46	2.53	2.51	2.56	2.63	2.71	2.65	2.71	2.79	2.88	2.78	2.84	2.93	3.02	2.89	2.95	3.05	3.14	2.99	3.05	3.15	3.25
	Amps	8.7	8.9	9.2	9.5	9.3	9.6	9.9	10.2	10.1	10.3	10.7	11.1	10.8	11.0	11.4	11.8	11.4	11.7	12.1	12.5	12.1	12.4	12.8	13.2
	Hi PR	139	150	158	165	156	168	178	185	178	191	202	211	203	218	230	240	228	245	259	270	252	271	286	298
	Lo PR	63	67	74	78	67	71	78	83	70	74	81	86	73	78	85	90	77	82	89	95	79	84	92	98
	MBh	31.4	32.1	34.3	36.7	30.7	31.4	33.5	35.8	30.0	30.6	32.7	35.0	29.3	29.9	31.9	34.1	27.8	28.4	30.3	32.4	25.7	26.3	28.1	30.0
	S/T	0.82	0.77	0.62	0.47	0.85	0.79	0.65	0.48	0.87	0.81	0.66	0.50	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.94	0.88	0.72	0.54
	DT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	26	24	21	17	24	23	20	16
	kW	2.29	2.33	2.40	2.47	2.45	2.50	2.57	2.65	2.59	2.65	2.73	2.81	2.72	2.77	2.86	2.95	2.83	2.88	2.97	3.07	2.92	2.98	3.07	3.17
	Amps	8.5	8.7	8.9	9.2	9.1	9.3	9.6	9.9	9.8	10.1	10.4	10.8	10.5	10.7	11.1	11.5	11.1	11.4	11.7	12.2	11.8	12.0	12.4	12.9
	Hi PR	135	145	154	160	152	163	172	180	173	186	196	204	196	211	223	233	221	238	251	262	244	263	278	289
	Lo PR	61	65	71	76	65	69	75	80	68	72	78	83	71	75	82	88	74	79	86	92	77	82	89	95

85	MBh	35.71	36.40	38.12	40.67	34.88	35.55	37.23	39.72	34.04	34.70	36.35	38.78	33.21	33.86	35.46	37.83	31.55	32.16	33.69	35.94	29.23	29.79	31.20	33.29
	S/T	0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
	DT	26	25	24	21	26	25	24	21	26	25	24	21	25	26	24	21	24	25	24	21	22	23	22	19
	kW	2.38	2.42	2.49	2.57	2.55	2.60	2.67	2.76	2.70	2.75	2.83	2.92	2.83	2.89	2.98	3.07	2.94	3.00	3.10	3.19	3.04	3.10	3.20	3.30
	Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.0	10.4	10.3	10.5	10.9	11.2	11.0	11.2	11.6	12.0	11.6	11.9	12.3	12.7	12.3	12.6	13.0	13.5
	Hi PR	142	153	162	169	160	172	181	189	181	195	206	215	207	222	235	245	232	250	264	276	257	276	292	304
	Lo PR	65	69	75	80	68	73	79	84	71	76	82	88	75	79	87	92	78	83	91	97	81	86	94	100
	MBh	34.7	35.3	37.0	39.5	33.9	34.5	36.1	38.6	33.1	33.7	35.3	37.6	32.2	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	0.98	0.89	0.72
	DT	27	26	25	21	27	26	25	22	27	27	25	22	27	27	25	22	26	26	25	22	24	25	23	20
932	kW	2.36	2.40	2.47	2.55	2.53	2.58	2.65	2.74	2.67	2.73	2.81	2.90	2.81	2.86	2.95	3.05	2.92	2.98	3.07	3.17	3.01	3.08	3.17	3.28
	Amps	8.8	9.0	9.2	9.6	9.4	9.6	9.9	10.3	10.2	10.4	10.8	11.1	10.9	11.1	11.5	11.9	11.5	11.8	12.2	12.6	12.2	12.5	12.9	13.3
	Hi PR	141	151	160	167	158	170	179	187	180	193	204	213	205	220	233	242	230	248	262	273	254	274	289	301
	Lo PR	64	68	74	79	68	72	79	84	70	75	82	87	74	79	86	91	77	82	90	96	80	85	93	99
	MBh	32.0	32.6	34.2	36.4	31.3	31.9	33.4	35.6	30.5	31.1	32.6	34.7	29.8	30.3	31.8	33.9	28.3	28.8	30.2	32.2	26.2	26.7	28.0	29.8
	S/T	0.86	0.83	0.75	0.61	0.89	0.86	0.77	0.63	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.66	0.98	0.94	0.85	0.69	0.98	0.95	0.86	0.70
	DT	27	27	25	22	27	27	25	22	27	27	25	22	28	27	26	22	27	27	25	22	25	25	24	20
	kW	2.31	2.35	2.42	2.49	2.47	2.52	2.59	2.67	2.61	2.67	2.75	2.83	2.74	2.80	2.88	2.97	2.85	2.91	3.00	3.09	2.94	3.00	3.10	3.20
	Amps	8.5	8.7	9.0	9.3	9.2	9.4	9.7	10.0	9.9	10.2	10.5	10.9	10.6	10.8	11.2	11.6	11.2	11.5	11.9	12.3	11.9	12.1	12.5	13.0
	Hi PR	137	147	155	162	153	165	174	182	174	188	198	207	198	214	226	235	223	240	254	265	247	265	280	292
	Lo PR	62	66	72	77	66	70	76	81	68	73	79	84	72	76	83	89	75	80	87	93	78	83	90	96

Shaded area is ARI Rating Conditions IDB: Entering Indoor Dry Bulb Temperature kW=Total system power Amps = outdoor unit amps (comp.+fan)
 High and low pressures are measured at the liquid and suction service valves. Design Subcooling, 9 ±3 °F @ the liquid service valve, ARI 95 test conditions

EXPANDED COOLING DATA — GSH140421A* / CA*F4860D6A*+TXV / MBR2000**-1

IDB*		Outdoor Ambient Temperature												115°F																																				
		65°F						75°F						85°F						95°F						105°F																								
		Entering Indoor Wet Bulb Temperature																																																
70	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																					
	MBh	38.8	40.2	44.1	-	37.9	39.3	43.0	-	37.0	38.3	42.0	-	36.1	37.4	41.0	-	34.3	35.5	38.9	-	31.8	32.9	36.1	-	31.8	32.9	36.1	-																					
	S/T	0.78	0.66	0.45	-	0.81	0.68	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.89	0.75	0.52	-	0.90	0.75	0.52	-	0.90	0.75	0.52	-																					
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-																					
	1575	kW	2.58	2.63	2.71	-	2.76	2.82	2.90	-	2.92	2.98	3.07	-	3.06	3.13	3.22	-	3.18	3.25	3.35	-	3.29	3.35	3.46	-	3.29	3.35	3.46	-																				
	Amps	3.1	3.4	3.7	-	3.9	4.1	4.4	-	4.7	5.0	5.3	-	5.4	5.7	6.1	-	6.1	6.4	6.8	-	6.9	7.2	7.6	-	6.9	7.2	7.6	-																					
	Hi PR	136	146	155	-	153	164	173	-	174	187	197	-	198	213	225	-	222	239	253	-	246	265	279	-	246	265	279	-																					
	Lo PR	63	67	73	-	67	71	77	-	69	74	80	-	73	77	84	-	76	81	89	-	79	84	92	-	79	84	92	-																					
	70	MBh	37.7	39.0	42.8	-	36.8	38.1	41.8	-	35.9	37.2	40.8	-	35.0	36.3	39.8	-	33.3	34.5	37.8	-	30.8	32.0	35.0	-	30.8	32.0	35.0	-																				
		S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.66	0.46	-	0.82	0.69	0.48	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-																				
ΔT		19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-	17	15	11	-																					
1400		kW	2.57	2.62	2.69	-	2.74	2.80	2.88	-	2.90	2.96	3.05	-	3.04	3.10	3.20	-	3.16	3.22	3.32	-	3.26	3.33	3.43	-	3.26	3.33	3.43	-																				
Amps		3.1	3.3	3.6	-	3.8	4.0	4.3	-	4.6	4.9	5.2	-	5.3	5.6	6.0	-	6.0	6.3	6.7	-	6.7	7.0	7.5	-	6.7	7.0	7.5	-																					
Hi PR		135	145	153	-	151	163	172	-	172	185	195	-	196	211	223	-	220	237	250	-	243	262	277	-	243	262	277	-																					
Lo PR		62	66	73	-	66	70	77	-	69	73	80	-	72	77	84	-	75	80	88	-	78	83	91	-	78	83	91	-																					
1225		MBh	34.8	36.0	39.5	-	34.0	35.2	38.6	-	33.2	34.4	37.7	-	32.3	33.5	36.7	-	30.7	31.9	34.9	-	28.5	29.5	32.3	-	28.5	29.5	32.3	-																				
		S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-																				
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-																				
	1225	kW	2.51	2.56	2.63	-	2.68	2.74	2.82	-	2.84	2.89	2.98	-	2.97	3.03	3.12	-	3.09	3.15	3.24	-	3.18	3.25	3.35	-	3.18	3.25	3.35	-																				
	Amps	2.8	3.0	3.3	-	3.5	3.7	4.1	-	4.3	4.6	4.9	-	5.0	5.3	5.6	-	5.7	6.0	6.4	-	6.4	6.7	7.1	-	6.4	6.7	7.1	-																					
	Hi PR	131	141	148	-	147	158	167	-	167	179	190	-	190	204	216	-	214	230	243	-	236	254	268	-	236	254	268	-																					
	Lo PR	61	64	70	-	64	68	74	-	67	71	77	-	70	74	81	-	73	78	85	-	76	81	88	-	76	81	88	-																					
	75	MBh	39.46	40.63	43.98	47.20	38.54	39.69	42.96	46.10	37.63	38.74	41.93	45.01	36.71	37.80	40.91	43.91	34.87	35.91	38.86	41.71	32.30	33.26	36.00	38.64	32.30	33.26	36.00	38.64																				
		S/T	0.89	0.80	0.60	0.39	0.92	0.83	0.63	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	1.00	0.91	0.69	0.44	1.00	0.92	0.69	0.45	1.00	0.92	0.69	0.45																				
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	16	11	19	18	15	10	19	18	15	10																				
1575		kW	2.60	2.65	2.73	2.81	2.79	2.84	2.92	3.01	2.95	3.01	3.10	3.19	3.09	3.15	3.25	3.35	3.21	3.27	3.38	3.48	3.31	3.38	3.49	3.60	3.31	3.38	3.49	3.60																				
Amps		3.2	3.4	3.7	4.1	4.0	4.2	4.5	4.9	4.8	5.1	5.4	5.8	5.5	5.8	6.2	6.6	6.3	6.5	7.0	7.4	7.0	7.3	7.7	8.2	7.0	7.3	7.7	8.2																					
Hi PR		137	148	156	163	154	166	175	183	175	189	199	208	200	215	227	237	225	242	255	266	248	267	282	294	248	267	282	294																					
Lo PR		64	68	74	79	67	72	78	83	70	74	81	87	73	78	85	91	77	82	89	95	80	85	93	99	80	85	93	99																					
75		MBh	38.3	39.4	42.7	45.8	37.4	38.5	41.7	44.8	36.5	37.6	40.7	43.7	35.6	36.7	39.7	42.6	33.9	34.9	37.7	40.5	31.4	32.3	35.0	37.5	31.4	32.3	35.0	37.5																				
		S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.87	0.66	0.43	0.98	0.87	0.66	0.43																				
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	20	19	15	10	20	19	15	10																				
	1400	kW	2.58	2.63	2.71	2.79	2.76	2.82	2.90	2.99	2.92	2.98	3.07	3.17	3.06	3.13	3.22	3.32	3.18	3.25	3.35	3.45	3.29	3.36	3.46	3.57	3.29	3.36	3.46	3.57																				
	Amps	3.1	3.4	3.7	4.0	3.9	4.1	4.4	4.8	4.7	5.0	5.3	5.7	5.4	5.7	6.1	6.5	6.1	6.4	6.8	7.3	6.9	7.2	7.6	8.1	6.9	7.2	7.6	8.1																					
	Hi PR	136	146	155	161	153	164	174	181	174	187	197	206	198	213	225	234	223	239	253	264	246	265	279	291	246	265	279	291																					
	Lo PR	63	67	73	78	67	71	77	82	69	74	80	86	73	77	84	90	76	81	89	94	79	84	92	98	79	84	92	98																					
	75	MBh	35.4	36.4	39.4	42.3	34.5	35.6	38.5	41.3	33.7	34.7	37.6	40.3	32.9	33.87	36.7	39.3	31.3	32.2	34.8	37.4	28.9	29.8	32.3	34.6	28.9	29.8	32.3	34.6																				
		S/T	0.82	0.73	0.56	0.36	0.85	0.76	0.58	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.93	0.84	0.63	0.41	0.94	0.84	0.64	0.41	0.94	0.84	0.64	0.41																				
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	17	11	20	19	15	11	20	19	15	11																				
1225		kW	2.53	2.58	2.65	2.73	2.70	2.76	2.84	2.92	2.86	2.91	3.00	3.09	2.99	3.05	3.15	3.24	3.11	3.17	3.27	3.37	3.21	3.28	3.38	3.48	3.21	3.28	3.38	3.48																				
Amps		2.9	3.1	3.4	3.7	3.6	3.8	4.1	4.5	4.4	4.7	5.0	5.4	5.1	5.4	5.8	6.2	5.8	6.1	6.5	7.0	6.5	6.8	7.2	7.7	6.5	6.8	7.2	7.7																					
Hi PR		132	142	150	156	148	159	168	176	168	181	191	200	192	206	218	227	216	232	245	256	238	257	271	283	238	257	271	283																					
Lo PR		61	65	71	76	65	69	75	80	67	71	78	83	71	75	82	87	74	79	86	91	76	81	89	95	76	81	89	95																					
Shaded area is ACCA (TVA) conditions																														kW=Total system power										Amps = outdoor unit amps (comp.*fan)										
High and low pressures are measured at the liquid and suction service valves.																														IDB: Entering Indoor Dry Bulb Temperature										Design Subcooling, 9 ±3 °F @ the liquid service valve, ARI 95 test conditions										

EXPANDED COOLING DATA — GSH140421A* / CA*F4860D6A*+TXV / MBR2000** -1 (CONT.)

		Outdoor Ambient Temperature																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		Entering Indoor Wet Bulb Temperature																							
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	40.16	41.04	43.85	46.87	38.30	39.13	41.81	44.69	37.36	38.18	40.79	43.60	35.49	36.27	38.75	41.42	32.88	33.60	35.89	38.37				
	S/T	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.64	1.00	1.00	0.86	0.64
	ΔT	23	22	19	15	23	22	19	15	22	22	19	15	22	22	20	16	21	21	19	15	19	20	18	14
	kW	2.62	2.67	2.75	2.83	2.81	2.86	2.95	3.03	2.97	3.03	3.12	3.22	3.11	3.18	3.27	3.37	3.23	3.30	3.40	3.51	3.34	3.41	3.51	3.63
	Amps	3.3	3.5	3.8	4.2	4.0	4.3	4.6	5.0	4.9	5.2	5.5	5.9	5.6	5.9	6.3	6.8	6.4	6.7	7.1	7.6	7.1	7.4	7.9	8.4
	Hi PR	139	149	158	165	156	168	177	185	177	191	201	210	202	217	229	239	227	244	258	269	251	270	285	297
	Lo PR	64	68	75	80	68	72	79	84	71	75	82	87	74	79	86	92	78	83	90	96	80	86	93	100
	MBh	39.0	39.8	42.6	45.5	38.1	38.9	41.6	44.4	37.2	38.0	40.6	43.4	36.3	37.1	39.6	42.3	34.5	35.2	37.6	40.2	31.9	32.6	34.8	37.3
	S/T	0.93	0.88	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.57	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.61	1.00	1.00	0.82	0.61
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15
1400	kW	2.60	2.65	2.73	2.81	2.79	2.84	2.92	3.01	2.95	3.01	3.10	3.19	3.09	3.15	3.25	3.35	3.21	3.27	3.38	3.48	3.31	3.38	3.49	3.60
	Amps	3.2	3.4	3.7	4.1	4.0	4.2	4.5	4.9	4.8	5.1	5.4	5.8	5.5	5.8	6.2	6.6	6.3	6.6	7.0	7.4	7.0	7.3	7.7	8.2
	Hi PR	137	148	156	163	154	166	175	183	175	189	199	208	200	215	227	237	225	242	255	266	248	267	282	294
	Lo PR	64	68	74	79	67	72	78	83	70	74	81	87	73	78	85	91	77	82	89	95	80	85	93	99
	MBh	36.0	36.8	39.3	42.0	35.2	35.9	38.4	41.0	34.3	35.1	37.5	40.0	33.5	34.2	36.6	39.1	31.8	32.5	34.7	37.1	29.5	30.1	32.2	34.4
	S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.75	0.56	1.02	0.96	0.78	0.58	1.03	0.97	0.79	0.59
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	23	20	16	23	22	19	15
	kW	2.55	2.60	2.67	2.75	2.72	2.78	2.86	2.94	2.88	2.94	3.02	3.12	3.02	3.08	3.17	3.27	3.13	3.20	3.30	3.40	3.23	3.30	3.40	3.51
	Amps	3.0	3.2	3.5	3.8	3.7	3.9	4.2	4.6	4.5	4.8	5.1	5.5	5.2	5.5	5.9	6.3	5.9	6.2	6.6	7.1	6.6	6.9	7.3	7.9
	Hi PR	133	143	152	158	150	161	170	177	170	183	193	202	194	209	220	230	218	235	248	258	241	259	274	286
Lo PR	62	66	72	76	65	69	76	81	68	72	79	84	71	76	83	88	75	79	87	92	77	82	90	96	

1575	MBh	40.87	41.66	43.63	46.54	39.92	40.69	42.61	45.46	38.96	39.72	41.60	44.38	38.01	38.75	40.58	43.30	36.11	36.81	38.55	41.13	33.45	34.10	35.71	38.10
	S/T	1.00	0.99	0.89	0.72	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.98	0.83	1.00	1.00	0.98	0.83
	ΔT	24	24	23	20	23	24	23	20	23	23	23	20	22	23	23	20	21	21	23	20	20	20	21	19
	kW	2.64	2.69	2.77	2.85	2.83	2.88	2.97	3.06	2.99	3.05	3.14	3.24	3.14	3.20	3.30	3.40	3.26	3.33	3.43	3.54	3.36	3.44	3.54	3.65
	Amps	3.4	3.6	3.9	4.3	4.1	4.4	4.7	5.1	5.0	5.3	5.6	6.1	5.7	6.0	6.4	6.9	6.5	6.8	7.2	7.7	7.2	7.5	8.0	8.5
	Hi PR	140	151	159	166	157	169	179	186	179	193	203	212	204	219	232	242	229	247	261	272	253	273	288	300
	Lo PR	65	69	75	80	69	73	80	85	71	76	83	88	75	80	87	93	79	84	91	97	81	86	94	101
	MBh	39.7	40.4	42.4	45.2	38.8	39.5	41.4	44.1	37.8	38.6	40.4	43.1	36.9	37.6	39.4	42.0	35.1	35.7	37.4	39.9	32.5	33.1	34.7	37.0
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79
	ΔT	25	25	24	21	25	25	24	21	25	25	24	21	24	25	24	21	23	23	24	21	21	22	22	19
1400	kW	2.62	2.67	2.75	2.83	2.81	2.86	2.95	3.03	2.97	3.03	3.12	3.22	3.11	3.18	3.27	3.37	3.23	3.30	3.40	3.51	3.34	3.41	3.51	3.63
	Amps	3.3	3.5	3.8	4.2	4.0	4.3	4.6	5.0	4.9	5.2	5.5	5.9	5.6	5.9	6.3	6.8	6.4	6.7	7.1	7.6	7.1	7.4	7.9	8.4
	Hi PR	139	149	158	165	156	168	177	185	177	191	201	210	202	217	229	239	227	244	258	269	251	270	285	297
	Lo PR	64	68	75	80	68	72	79	84	71	75	82	87	74	79	86	92	78	83	90	96	80	86	93	100
	MBh	36.6	37.3	39.1	41.7	35.8	36.5	38.2	40.7	34.9	35.6	37.3	39.8	34.1	34.7	36.4	38.8	32.4	33.0	34.5	36.9	30.0	30.6	32.0	34.1
	S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.94	0.77
	ΔT	26	26	24	21	26	26	24	21	26	26	24	21	26	26	25	21	24	25	24	21	22	23	23	20
	kW	2.57	2.61	2.69	2.77	2.74	2.80	2.88	2.97	2.90	2.96	3.05	3.14	3.04	3.10	3.20	3.29	3.16	3.22	3.32	3.43	3.26	3.33	3.43	3.54
	Amps	3.1	3.3	3.6	3.9	3.8	4.0	4.3	4.7	4.6	4.9	5.2	5.6	5.3	5.6	6.0	6.4	6.0	6.3	6.7	7.2	6.7	7.0	7.5	8.0
	Hi PR	135	145	153	160	151	163	172	179	172	185	195	204	196	211	222	232	220	237	250	261	243	262	276	288
	Lo PR	62	66	72	77	66	70	77	82	69	73	80	85	72	77	84	89	75	80	88	93	78	83	91	97

Shaded area is ARI Rating Conditions IDB: Entering Indoor Dry Bulb Temperature kW=Total system power Amps = outdoor unit amps (comp.+fan)
 High and low pressures are measured at the liquid and suction service valves. Design Subcooling, 9 ±3 °F @ the liquid service valve, ARI 95 test conditions

EXPANDED COOLING DATA — GSH140481A* / CA*F4860D6A*+TXV / MBR2000**-1

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70		MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-	36.9	38.2	41.9	-															
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-															
	1744	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-	17	14	11	-															
		kW	3.09	3.15	3.25	-	3.31	3.38	3.48	-	3.51	3.58	3.69	-	3.68	3.76	3.88	-	3.83	3.91	4.03	-	3.96	4.04	4.17	-	3.96	4.04	4.17	-	3.96	4.04	4.17	-															
		Amps	3.8	4.1	4.5	-	4.7	5.0	5.4	-	5.8	6.1	6.6	-	6.7	7.0	7.5	-	7.6	8.0	8.5	-	8.5	8.9	9.5	-	8.5	8.9	9.5	-	8.5	8.9	9.5	-															
		Hi PR	130	140	148	-	146	157	166	-	166	179	188	-	189	203	215	-	213	229	242	-	235	253	267	-	235	253	267	-	235	253	267	-															
		Lo PR	62	66	72	-	65	69	76	-	68	72	79	-	71	76	83	-	75	79	87	-	77	82	90	-	77	82	90	-	77	82	90	-															
		MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-	35.8	37.1	40.7	-															
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-	0.81	0.68	0.47	-	0.81	0.68	0.47	-															
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-	17	15	11	-															
	1550	kW	3.07	3.13	3.22	-	3.29	3.36	3.46	-	3.48	3.56	3.66	-	3.65	3.73	3.85	-	3.80	3.88	4.00	-	3.93	4.01	4.14	-	3.93	4.01	4.14	-	3.93	4.01	4.14	-															
	Amps	3.7	4.0	4.4	-	4.6	4.9	5.3	-	5.7	6.0	6.4	-	6.6	6.9	7.4	-	7.5	7.8	8.4	-	8.4	8.8	9.3	-	8.4	8.8	9.3	-	8.4	8.8	9.3	-																
	Hi PR	129	138	146	-	144	155	164	-	164	177	187	-	187	201	213	-	210	226	239	-	233	250	264	-	233	250	264	-	233	250	264	-																
	Lo PR	61	65	71	-	65	69	75	-	67	71	78	-	70	75	82	-	74	79	86	-	76	81	89	-	76	81	89	-	76	81	89	-																
1356		MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-	33.1	34.3	37.5	-															
		S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-															
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	13	-	19	16	12	-	18	15	12	-	18	15	12	-	18	15	12	-															
	1356	kW	3.00	3.06	3.15	-	3.21	3.28	3.38	-	3.40	3.47	3.58	-	3.57	3.64	3.76	-	3.71	3.79	3.91	-	3.83	3.91	4.04	-	3.83	3.91	4.04	-	3.83	3.91	4.04	-															
		Amps	3.4	3.7	4.0	-	4.3	4.6	5.0	-	5.3	5.6	6.0	-	6.2	6.5	7.0	-	7.1	7.4	7.9	-	7.9	8.3	8.8	-	7.9	8.3	8.8	-	7.9	8.3	8.8	-															
		Hi PR	125	134	142	-	140	151	159	-	159	171	181	-	181	195	206	-	204	220	232	-	226	243	256	-	226	243	256	-	226	243	256	-															
		Lo PR	59	63	69	-	63	67	73	-	65	69	76	-	68	73	79	-	72	76	83	-	74	79	86	-	74	79	86	-	74	79	86	-															
	75		MBh	45.84	47.20	51.09	54.83	44.77	46.10	49.90	53.55	43.71	45.00	48.71	52.28	42.64	43.90	47.52	51.00	40.51	41.71	45.15	48.45	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88	37.52	38.64	41.82	44.88														
			S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.61	0.39	0.92	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.86	0.65	0.42	0.97	0.86	0.65	0.42	0.97	0.86	0.65	0.42														
		1744	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10	19	18	14	10	19	18	14	10														
			kW	3.12	3.18	3.27	3.37	3.34	3.41	3.51	3.62	3.54	3.61	3.72	3.84	3.71	3.79	3.91	4.03	3.86	3.94	4.07	4.20	3.99	4.07	4.20	4.34	3.99	4.07	4.20	4.34	3.99	4.07	4.20	4.34														
		Amps	3.9	4.2	4.6	5.0	4.8	5.1	5.6	6.0	5.9	6.2	6.7	7.2	6.8	7.2	7.7	8.2	7.7	8.1	8.6	9.3	8.7	9.1	9.6	10.3	8.7	9.1	9.6	10.3	8.7	9.1	9.6	10.3															
		Hi PR	131	141	149	156	147	159	167	175	168	180	190	199	191	205	217	226	215	231	244	254	237	255	270	281	237	255	270	281	237	255	270	281															
		Lo PR	62	66	72	77	66	70	76	81	68	73	79	85	72	76	83	89	75	80	87	93	78	83	91	96	78	83	91	96	78	83	91	96															
		MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6	36.4	37.5	40.6	43.6															
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40	0.92	0.82	0.62	0.40	0.92	0.82	0.62	0.40															
		ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	20	18	15	10	20	18	15	10															
1550		kW	3.09	3.15	3.25	3.34	3.31	3.38	3.48	3.59	3.51	3.58	3.69	3.81	3.68	3.76	3.88	4.00	3.83	3.91	4.03	4.16	3.96	4.04	4.17	4.31	3.96	4.04	4.17	4.31	3.96	4.04	4.17	4.31															
	Amps	3.8	4.1	4.5	4.9	4.7	5.0	5.4	5.9	5.8	6.1	6.6	7.1	6.7	7.0	7.5	8.1	7.6	8.0	8.5	9.1	8.5	8.9	9.5	10.1	8.5	8.9	9.5	10.1	8.5	8.9	9.5	10.1																
	Hi PR	130	140	148	154	146	157	166	173	166	179	189	197	189	203	215	224	213	229	242	252	235	253	267	278	235	253	267	278	235	253	267	278																
	Lo PR	62	66	72	76	65	69	76	81	68	72	79	84	71	76	83	88	75	79	87	92	77	82	90	95	77	82	90	95	77	82	90	95																
	MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2	33.6	34.6	37.5	40.2	33.6	34.6	37.5	40.2																
	S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.80	0.60	0.39	0.89	0.80	0.60	0.39	0.89	0.80	0.60	0.39																
	ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11	20	19	15	11	20	19	15	11																
1356	kW	3.02	3.08	3.17	3.27	3.24	3.30	3.40	3.51	3.43	3.50	3.61	3.72	3.60	3.67	3.79	3.90	3.74	3.82	3.94	4.06	3.86	3.94	4.07	4.20	3.86	3.94	4.07	4.20	3.86	3.94	4.07	4.20																
	Amps	3.5	3.8	4.1	4.6																																												

EXPANDED COOLING DATA — GSH140481A* / CA*F4860D6A*+TXV / MBR2000** -1 (CONT.)

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB*	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
80	MBh	46.66	47.67	50.93	54.45	45.57	46.57	49.75	53.18	44.49	45.48	48.56	51.92	43.40	44.35	47.38	50.65	41.23	42.13	45.01	48.12	38.19	39.03	41.69	44.57																								
	S/T	0.92	0.87	0.70	0.53	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.81	0.60																								
	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	20	21	18	14																								
	kW	3.14	3.20	3.30	3.40	3.37	3.43	3.54	3.65	3.57	3.64	3.75	3.87	3.74	3.82	3.94	4.07	3.89	3.97	4.10	4.23	4.02	4.11	4.24	4.38																								
	Amps	4.0	4.3	4.7	5.1	5.0	5.3	5.7	6.2	6.0	6.4	6.8	7.4	7.0	7.3	7.8	8.4	7.9	8.3	8.8	9.4	8.8	9.2	9.8	10.4																								
	Hi PR	133	143	151	157	149	160	169	176	169	182	192	201	193	207	219	228	217	233	246	257	240	258	272	284																								
	Lo PR	63	67	73	78	67	71	77	82	69	74	80	86	73	77	84	90	76	81	88	94	79	84	91	97																								
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3																								
	S/T	0.88	0.83	0.67	0.50	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.53	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.57	1.00	0.95	0.77	0.58																								
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	22	21	19	15																								
	kW	3.12	3.18	3.27	3.37	3.34	3.41	3.51	3.62	3.54	3.61	3.72	3.84	3.71	3.79	3.91	4.03	3.86	3.94	4.07	4.20	3.99	4.08	4.20	4.34																								
Amps	3.9	4.2	4.6	5.0	4.8	5.1	5.6	6.0	5.9	6.2	6.7	7.2	6.8	7.2	7.7	8.2	7.8	8.1	8.7	9.3	8.7	9.1	9.6	10.3																									
Hi PR	131	141	149	156	147	159	167	175	168	180	190	199	191	205	217	226	215	231	244	255	237	255	270	281																									
Lo PR	62	66	72	77	66	70	76	81	68	73	79	85	72	76	84	89	75	80	88	93	78	83	91	96																									
1550	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9																								
	S/T	0.85	0.80	0.65	0.48	0.88	0.83	0.67	0.50	0.90	0.85	0.69	0.51	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.97	0.91	0.74	0.56																								
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	20	16	24	23	20	16	23	22	19	15																								
	kW	3.05	3.11	3.20	3.29	3.26	3.33	3.43	3.53	3.46	3.53	3.63	3.75	3.63	3.70	3.82	3.94	3.77	3.85	3.97	4.10	3.89	3.98	4.10	4.23																								
	Amps	3.6	3.9	4.2	4.7	4.5	4.8	5.2	5.7	5.5	5.9	6.3	6.8	6.4	6.8	7.3	7.8	7.3	7.7	8.2	8.8	8.2	8.6	9.1	9.8																								
	Hi PR	127	137	145	151	143	154	162	169	163	175	185	193	185	199	210	219	208	224	237	247	230	248	262	273																								
	Lo PR	60	64	70	75	64	68	74	79	66	71	77	82	70	74	81	86	73	78	85	90	76	80	88	94																								

1744	MBh	47.47	48.39	50.68	54.07	46.37	47.26	49.50	52.81	45.26	46.14	48.32	51.55	44.16	45.01	47.14	50.29	41.95	42.76	44.79	47.78	38.86	39.61	41.49	44.26										
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79										
	ΔT	24	24	23	19	24	24	23	20	24	24	23	20	23	24	23	20	22	23	23	20	20	21	21	18										
	kW	3.16	3.23	3.32	3.42	3.39	3.46	3.57	3.68	3.59	3.67	3.78	3.90	3.77	3.85	3.97	4.10	3.92	4.01	4.13	4.27	4.05	4.14	4.27	4.41										
	Amps	4.1	4.4	4.8	5.3	5.1	5.4	5.8	6.3	6.2	6.5	7.0	7.5	7.1	7.5	8.0	8.5	8.0	8.4	9.0	9.6	9.0	9.4	9.9	10.6										
	Hi PR	134	144	152	159	150	162	171	178	171	184	194	203	195	210	221	231	219	236	249	260	242	260	275	287										
	Lo PR	64	68	74	79	67	71	78	83	70	74	81	86	73	78	85	91	77	82	89	95	79	85	92	98										
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0										
	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75										
	ΔT	25	25	23	20	26	25	24	21	26	25	24	21	25	25	24	21	24	25	24	20	22	23	22	19										
	kW	3.14	3.20	3.30	3.40	3.37	3.43	3.54	3.65	3.57	3.64	3.75	3.87	3.74	3.82	3.94	4.07	3.89	3.97	4.10	4.23	4.02	4.11	4.24	4.38										
1550	Amps	4.0	4.3	4.7	5.1	5.0	5.3	5.7	6.2	6.0	6.4	6.8	7.4	7.0	7.3	7.8	8.4	7.9	8.3	8.8	9.4	8.8	9.2	9.8	10.4										
	Hi PR	133	143	151	157	149	160	169	176	169	182	192	201	193	207	219	228	217	233	246	257	240	258	272	284										
	Lo PR	63	67	73	78	67	71	77	82	69	74	80	86	73	77	84	90	76	81	88	94	79	84	91	97										
	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7										
	S/T	0.89	0.86	0.78	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	0.99	0.89	0.72										
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21	24	24	22	19										
	kW	3.07	3.13	3.22	3.32	3.29	3.35	3.46	3.56	3.48	3.55	3.66	3.78	3.65	3.73	3.85	3.97	3.80	3.88	4.00	4.13	3.93	4.01	4.14	4.27										
	Amps	3.7	4.0	4.4	4.8	4.6	4.9	5.3	5.8	5.7	6.0	6.4	6.9	6.6	6.9	7.4	7.9	7.5	7.8	8.3	8.9	8.4	8.7	9.3	9.9										
	Hi PR	129	138	146	152	144	155	164	171	164	177	187	195	187	201	212	222	210	226	239	249	232	250	264	275										
	Lo PR	61	65	71	76	65	69	75	80	67	71	78	83	70	75	82	87	74	79	86	91	76	81	89	94										

Shaded area is ARI Rating Conditions IDB: Entering Indoor Dry Bulb Temperature kW= Total system power Amps = outdoor unit amps (comp.+fan)
 High and low pressures are measured at the liquid and suction service valves. Design Subcooling, 9 ±3 °F @ the liquid service valve, ARI 95 test conditions

EXPANDED COOLING DATA — GSH140601A* / CA*F4860D6A* +TXV / MBR2000** -1

IDB*		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71									
2081	MBh	54.4	56.4	61.8	-	53.1	55.1	60.3	-	51.9	53.7	58.9	-	50.6	52.4	57.5	-	48.1	49.8	54.6	-	44.5	46.1	50.6	-	44.5	46.1	50.6	-								
	S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.87	0.73	0.50	-	0.88	0.73	0.51	-	0.88	0.73	0.51	-								
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-								
	kW	3.32	3.39	3.49	-	3.57	3.65	3.77	-	3.80	3.88	4.01	-	4.00	4.09	4.22	-	4.17	4.26	4.40	-	4.31	4.41	4.56	-	4.31	4.41	4.56	-								
	Amps	12.1	12.4	12.8	-	13.1	13.4	13.9	-	14.2	14.6	15.1	-	15.2	15.6	16.1	-	16.2	16.6	17.2	-	17.2	17.6	18.2	-	17.2	17.6	18.2	-								
	Hi PR	132	142	150	-	148	160	169	-	169	182	192	-	192	207	218	-	216	233	246	-	239	257	271	-	239	257	271	-								
	Lo PR	59	63	69	-	63	67	73	-	65	69	76	-	69	73	80	-	72	76	83	-	74	79	86	-	74	79	86	-								
	MBh	52.8	54.7	60.0	-	51.6	53.5	58.6	-	50.3	52.2	57.2	-	49.1	50.9	55.8	-	46.7	48.4	53.0	-	43.2	44.8	49.1	-	43.2	44.8	49.1	-								
	S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.48	-	0.84	0.70	0.48	-								
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-								
	1850	kW	3.29	3.36	3.47	-	3.54	3.62	3.74	-	3.77	3.85	3.98	-	3.97	4.05	4.19	-	4.13	4.23	4.37	-	4.28	4.37	4.52	-	4.28	4.37	4.52	-							
Amps		12.0	12.3	12.7	-	13.0	13.3	13.7	-	14.1	14.5	14.9	-	15.1	15.5	16.0	-	16.1	16.5	17.0	-	17.1	17.5	18.1	-	17.1	17.5	18.1	-								
Hi PR		131	141	149	-	147	158	167	-	167	180	190	-	190	205	216	-	214	230	243	-	236	254	269	-	236	254	269	-								
Lo PR		59	63	68	-	62	66	72	-	65	69	75	-	68	72	79	-	71	76	83	-	74	78	85	-	74	78	85	-								
MBh		48.7	50.5	55.3	-	47.6	49.3	54.1	-	46.5	48.2	52.8	-	45.3	47.0	51.5	-	43.1	44.6	48.9	-	39.9	41.4	45.3	-	39.9	41.4	45.3	-								
S/T		0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	0.81	0.67	0.47	-								
ΔT		19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-								
kW		3.21	3.28	3.38	-	3.46	3.53	3.65	-	3.68	3.76	3.88	-	3.87	3.95	4.08	-	4.03	4.12	4.25	-	4.17	4.26	4.40	-	4.17	4.26	4.40	-								
Amps		11.7	11.9	12.3	-	12.6	12.9	13.3	-	13.7	14.1	14.5	-	14.7	15.0	15.5	-	15.6	16.0	16.6	-	16.6	17.0	17.6	-	16.6	17.0	17.6	-								
Hi PR		127	137	144	-	142	153	162	-	162	174	184	-	185	199	210	-	208	223	236	-	229	247	261	-	229	247	261	-								
Lo PR		57	61	66	-	60	64	70	-	63	67	73	-	66	70	76	-	69	73	80	-	71	76	83	-	71	76	83	-								

2081	MBh	55.31	56.94	61.64	66.15	54.02	55.62	60.20	64.61	52.73	54.30	58.77	63.08	51.45	52.97	57.34	61.54	48.88	50.32	54.47	58.46	45.27	46.61	50.46	54.15
	S/T	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.99	0.88	0.67	0.43	1.00	0.89	0.67	0.43
	ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
	kW	3.34	3.42	3.52	3.64	3.60	3.68	3.80	3.92	3.83	3.91	4.04	4.18	4.03	4.12	4.26	4.40	4.20	4.30	4.44	4.59	4.35	4.45	4.60	4.75
	Amps	12.2	12.5	12.9	13.4	13.2	13.5	14.0	14.5	14.4	14.7	15.2	15.8	15.4	15.8	16.3	16.9	16.4	16.8	17.4	18.0	17.4	17.8	18.4	19.1
	Hi PR	134	144	152	158	150	161	170	178	170	183	194	202	194	209	221	230	218	235	248	259	241	260	274	286
	Lo PR	60	64	70	74	63	67	74	78	66	70	77	82	69	74	80	86	73	77	84	90	75	80	87	93
	MBh	53.7	55.3	59.8	64.2	52.4	54.0	58.4	62.7	51.2	52.7	57.1	61.2	50.0	51.4	55.7	59.7	47.5	48.9	52.9	56.8	44.0	45.3	49.0	52.6
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.59	0.38	0.91	0.81	0.61	0.40	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
	ΔT	22	20	17	11	22	21	17	12	22	21	17	12	23	21	17	12	22	20	17	12	21	19	16	11
1850	kW	3.32	3.39	3.50	3.61	3.57	3.65	3.77	3.89	3.80	3.88	4.01	4.14	4.00	4.09	4.22	4.36	4.17	4.26	4.40	4.55	4.31	4.41	4.56	4.71
	Amps	12.1	12.4	12.8	13.3	13.1	13.4	13.9	14.4	14.2	14.6	15.1	15.7	15.2	15.6	16.1	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.3	19.0
	Hi PR	132	142	150	157	148	160	169	176	169	182	192	200	192	207	218	228	216	233	246	256	239	257	271	283
	Lo PR	59	63	69	73	63	67	73	78	65	69	76	81	69	73	80	85	72	76	83	89	74	79	86	92
	MBh	49.6	51.0	55.2	59.3	48.4	49.8	53.9	57.9	47.3	48.7	52.7	56.5	46.1	47.5	51.4	55.1	43.8	45.1	48.8	52.4	40.6	41.8	45.2	48.5
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.40	0.92	0.82	0.62	0.40
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
	kW	3.24	3.31	3.41	3.52	3.49	3.56	3.68	3.80	3.71	3.79	3.91	4.04	3.90	3.99	4.12	4.25	4.06	4.15	4.29	4.44	4.21	4.30	4.44	4.59
	Amps	11.8	12.0	12.4	12.9	12.7	13.0	13.5	14.0	13.8	14.2	14.7	15.2	14.8	15.2	15.7	16.3	15.8	16.2	16.7	17.4	16.7	17.1	17.7	18.4
	Hi PR	128	138	146	152	144	155	164	171	164	176	186	194	186	201	212	221	210	226	238	249	232	249	263	275
Lo PR	58	61	67	71	61	65	71	75	63	67	74	78	66	71	77	82	70	74	81	86	72	77	84	89	
1619	MBh	49.6	51.0	55.2	59.3	48.4	49.8	53.9	57.9	47.3	48.7	52.7	56.5	46.1	47.5	51.4	55.1	43.8	45.1	48.8	52.4	40.6	41.8	45.2	48.5
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.40	0.92	0.82	0.62	0.40
	ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
	kW	3.24	3.31	3.41	3.52	3.49	3.56	3.68	3.80	3.71	3.79	3.91	4.04	3.90	3.99	4.12	4.25	4.06	4.15	4.29	4.44	4.21	4.30	4.44	4.59
	Amps	11.8	12.0	12.4	12.9	12.7	13.0	13.5	14.0	13.8	14.2	14.7	15.2	14.8	15.2	15.7	16.3	15.8	16.2	16.7	17.4	16.7	17.1	17.7	18.4
	Hi PR	128	138	146	152	144	155	164	171	164	176	186	194	186	201	212	221	210	226	238	249	232	249	263	275
	Lo PR	58	61	67	71	61	65	71	75	63	67	74	78	66	71	77	82	70	74	81	86	72	77	84	89

EXPANDED COOLING DATA — GSH140601A* / CA*F4860D6A* +TXV / MBR2000**-1 (CONT.)

IDB*	Airflow	Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	2081	MBh	56.29	57.52	61.45	65.69	54.38	56.18	60.02	64.16	53.67	54.84	58.59	62.64	52.36	53.51	57.17	61.11	49.74	50.83	54.31	58.05	46.08	47.09	50.31	53.78											
		S/T	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62											
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	23	24	20	16	22	22	20	16	20	21	19	15											
		kW	3.37	3.44	3.55	3.67	3.63	3.71	3.83	3.96	3.86	3.95	4.08	4.21	4.07	4.16	4.29	4.44	4.24	4.33	4.48	4.63	4.39	4.49	4.64	4.80											
		Amps	12.3	12.6	13.0	13.5	13.3	13.7	14.1	14.7	14.5	14.9	15.4	16.0	15.5	15.9	16.5	17.1	16.5	17.0	17.5	18.2	17.5	18.0	18.6	19.3											
	Hi PR	135	145	153	160	151	163	172	179	172	185	196	204	196	211	223	232	221	237	251	261	244	262	277	289												
	Lo PR	61	64	70	75	64	68	74	79	67	71	77	82	70	74	81	86	73	78	85	91	76	81	88	94												
	MBh	54.7	55.8	59.7	63.8	53.4	54.5	58.3	62.3	52.1	53.2	56.9	60.8	50.8	51.9	55.5	59.3	48.3	49.4	52.7	56.4	44.7	45.7	48.8	52.2												
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.98	0.79	0.59												
	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	24	24	21	17	22	22	19	15												
1850	kW	3.34	3.42	3.52	3.64	3.60	3.68	3.80	3.92	3.83	3.92	4.04	4.18	4.03	4.12	4.26	4.40	4.20	4.30	4.44	4.59	4.35	4.45	4.60	4.76												
	Amps	12.2	12.5	12.9	13.4	13.2	13.5	14.0	14.5	14.4	14.7	15.2	15.8	15.4	15.8	16.3	16.9	16.4	16.8	17.4	18.0	17.4	17.8	18.4	19.1												
	Hi PR	134	144	152	158	150	161	170	178	170	183	194	202	194	209	221	230	218	235	248	259	241	260	274	286												
	Lo PR	60	64	70	74	63	67	74	78	66	70	77	82	69	74	80	86	73	77	84	90	75	80	87	93												
	MBh	50.4	51.5	55.1	58.9	49.3	50.3	53.8	57.5	48.1	49.1	52.5	56.1	46.9	47.9	51.2	54.8	44.6	45.6	48.7	52.0	41.3	42.2	45.1	48.2												
1619	S/T	0.87	0.82	0.67	0.50	0.91	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	1.00	0.93	0.76	0.57	1.00	0.94	0.77	0.57												
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	26	25	21	17	25	24	21	17	24	23	20	16												
	kW	3.26	3.33	3.44	3.55	3.52	3.59	3.71	3.83	3.74	3.82	3.94	4.07	3.93	4.02	4.15	4.29	4.10	4.19	4.33	4.47	4.24	4.34	4.48	4.63												
	Amps	11.9	12.2	12.6	13.0	12.8	13.2	13.6	14.1	14.0	14.3	14.8	15.4	15.0	15.3	15.8	16.4	15.9	16.3	16.9	17.5	16.9	17.3	17.9	18.6												
	Hi PR	130	139	147	154	145	156	165	172	165	178	188	196	188	203	214	223	212	228	241	251	234	252	266	277												
Lo PR	58	62	68	72	62	65	71	76	64	68	74	79	67	71	78	83	70	75	82	87	73	77	85	90													

2081	MBh	57.27	58.38	61.15	65.23	55.94	57.02	59.72	63.72	54.61	55.67	58.30	62.20	53.28	54.31	56.88	60.68	50.61	51.59	54.04	57.65	46.88	47.79	50.05	53.40
	S/T	1.00	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	1.00	0.81
	ΔT	25	25	23	20	25	25	24	21	24	25	24	21	24	24	24	21	22	23	24	20	21	21	22	19
	KW	3.40	3.47	3.58	3.70	3.66	3.74	3.86	3.99	3.89	3.98	4.11	4.25	4.10	4.19	4.33	4.48	4.27	4.37	4.52	4.67	4.43	4.53	4.68	4.84
	Amps	12.4	12.7	13.2	13.7	13.5	13.8	14.3	14.8	14.6	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.2	18.8	19.5
	Hi PR	136	147	155	161	153	165	174	181	174	187	198	206	198	213	225	235	223	240	253	264	246	265	280	292
	Lo PR	61	65	71	76	65	69	75	80	67	72	78	83	71	75	82	87	74	79	86	92	77	81	89	95
	MBh	55.6	56.7	59.4	63.3	54.3	55.4	58.0	61.9	53.0	54.0	56.6	60.4	51.7	52.7	55.2	58.9	49.1	50.1	52.5	56.0	45.5	46.4	48.6	51.8
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	26	26	24	21	27	26	25	21	26	26	25	21	26	26	25	22	24	25	25	21	23	23	23	20
1850	KW	3.37	3.44	3.55	3.67	3.63	3.71	3.83	3.96	3.86	3.95	4.08	4.21	4.07	4.16	4.29	4.44	4.24	4.33	4.48	4.63	4.39	4.49	4.64	4.80
	Amps	12.3	12.6	13.0	13.5	13.3	13.7	14.1	14.7	14.5	14.9	15.4	16.0	15.5	15.9	16.5	17.1	16.5	17.0	17.5	18.2	17.5	18.0	18.6	19.3
	Hi PR	135	145	153	160	151	163	172	179	172	185	196	204	196	211	223	232	221	237	251	261	244	262	277	289
	Lo PR	61	64	70	75	64	68	74	79	67	71	77	82	70	74	81	86	73	78	85	91	76	81	88	94
	MBh	51.3	52.3	54.8	58.5	50.1	51.1	53.5	57.1	48.9	49.9	52.2	55.7	47.7	48.7	51.0	54.4	45.4	46.2	48.4	51.7	42.0	42.8	44.9	47.9
	S/T	0.92	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.74
	ΔT	27	26	25	22	27	27	25	22	27	27	25	22	27	27	25	22	26	26	25	22	24	24	23	20
	KW	3.29	3.36	3.47	3.58	3.54	3.62	3.74	3.86	3.77	3.85	3.97	4.11	3.96	4.05	4.19	4.33	4.13	4.22	4.36	4.51	4.28	4.37	4.52	4.67
	Amps	12.0	12.3	12.7	13.2	13.0	13.3	13.7	14.2	14.1	14.5	14.9	15.5	15.1	15.5	16.0	16.6	16.1	16.5	17.0	17.7	17.0	17.5	18.1	18.8
	Hi PR	131	141	149	155	147	158	167	174	167	180	190	198	190	205	216	225	214	230	243	254	236	254	269	280
Lo PR	59	63	68	73	62	66	72	77	65	69	75	80	68	72	79	84	71	76	83	88	74	78	85	91	

Shaded area is ARI Rating Conditions
High and low pressures are measured at the liquid and suction service valves.

IDB: Entering Indoor Dry Bulb Temperature
kW=Total system power
Amps = outdoor unit amps (comp.+fan)
Design Subcooling, 9 ±3 °F @ the liquid service valve, ARI 95 test conditions

EXPANDED HEATING DATA

GSH140181A* / CA*F3131B6A*+TXV / MBR800-1**

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	22.6	21.4	20.2	18.8	18.0	17.4	16.2	14.9	13.6	12.5	11.5	10.9	10.5	9.4	8.3	7.3	6.2	5.1
ΔT	34.9	33.1	31.1	29.1	27.8	26.9	25.0	23.1	20.9	19.3	17.8	16.8	16.2	14.5	12.9	11.2	9.6	7.8
kW	1.56	1.53	1.50	1.47	1.5	1.44	1.41	1.38	1.38	1.35	1.32	1.30	1.28	1.25	1.22	1.19	1.16	1.13
Amps	7.1	6.5	6.1	5.8	5.6	5.5	5.2	4.9	4.7	4.5	4.3	4.2	4.1	3.9	3.7	3.5	3.2	2.9
COP	4.23	4.09	3.93	3.75	3.62	3.54	3.36	3.16	2.88	2.72	2.56	2.45	2.39	2.19	1.99	1.78	1.56	1.31
EER	14.5	14.0	13.4	12.8	12.4	12.1	11.5	10.8	9.8	9.3	8.8	8.4	8.2	7.5	6.8	6.1	5.3	4.5
Hi PR	248	237	228	218	213	209	201	193	185	176	169	165	162	156	150	144	139	134
Lo PR	82	76	71	66	62	60	55	49	44	39	35	32	31	26	23	19	17	13

GSH140241A* / CA*F3636B6A*+TXV / MBR8001**

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	30.2	28.6	26.9	25.1	24.0	23.3	21.6	19.9	18.8	17.3	15.9	15.1	14.5	13.0	11.5	10.1	8.6	7.0
ΔT	32.9	31.1	29.3	27.4	26.1	25.3	23.5	21.7	20.4	18.9	17.4	16.4	15.8	14.2	12.6	11.0	9.4	7.7
kW	2.06	2.02	1.98	1.94	1.9	1.90	1.86	1.83	1.89	1.85	1.81	1.78	1.77	1.73	1.68	1.64	1.60	1.56
Amps	7.9	7.6	7.5	7.3	7.2	7.2	7.1	7.0	6.9	6.8	6.7	6.7	6.6	6.5	6.4	6.4	6.2	6.1
COP	4.30	4.14	3.98	3.79	3.66	3.58	3.39	3.19	2.91	2.74	2.58	2.47	2.40	2.21	2.00	1.79	1.57	1.32
EER	14.7	14.2	13.6	13.0	12.5	12.2	11.6	10.9	9.9	9.4	8.8	8.4	8.2	7.5	6.8	6.1	5.4	4.5
Hi PR	227	218	209	200	195	192	184	177	169	162	155	152	149	143	138	132	127	123
Lo PR	80	74	70	64	61	58	54	48	43	38	34	31	30	26	22	19	16	13

GSH140301A* / CA*F3636B6A*+TXV / MBR1200-1**

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	34.7	32.8	30.9	28.9	27.6	26.7	24.8	22.9	20.9	19.3	17.8	16.8	16.2	14.5	12.9	11.2	9.6	7.8
ΔT	29.8	28.2	26.5	24.8	23.7	22.9	21.3	19.6	18.0	16.6	15.3	14.4	13.9	12.4	11.0	9.6	8.2	6.7
kW	2.24	2.20	2.16	2.12	2.1	2.08	2.04	2.00	2.06	2.02	1.98	1.95	1.93	1.89	1.85	1.80	1.76	1.72
Amps	9.6	8.9	8.4	7.9	7.6	7.5	7.1	6.7	6.4	6.2	5.9	5.7	5.7	5.4	5.0	4.8	4.4	4.0
COP	4.53	4.37	4.19	4.00	3.86	3.77	3.57	3.36	2.97	2.80	2.63	2.52	2.45	2.25	2.04	1.82	1.59	1.34
EER	15.5	14.9	14.3	13.7	13.2	12.9	12.2	11.5	10.1	9.6	9.0	8.6	8.4	7.7	7.0	6.2	5.4	4.6
Hi PR	216	208	200	191	186	183	176	169	162	154	148	145	142	137	131	126	121	117
Lo PR	80	74	69	64	60	58	53	47	43	38	34	31	30	25	22	19	16	13

GSH140361A* / CA*F4860C6A*+TXV / MBR1600-1**

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	43.5	41.2	38.8	36.2	34.6	33.5	31.1	28.7	26.9	24.9	22.9	21.6	20.8	18.7	16.6	14.4	12.3	10.1
ΔT	37.8	35.8	33.7	31.5	30.1	29.1	27.1	25.0	23.4	21.6	19.9	18.8	18.1	16.2	14.4	12.6	10.7	8.8
kW	2.91	2.86	2.80	2.75	2.7	2.69	2.64	2.59	2.64	2.58	2.53	2.50	2.47	2.41	2.36	2.30	2.24	2.19
Amps	13.1	12.2	11.4	10.8	10.4	10.2	9.7	9.2	8.8	8.5	8.1	7.9	7.8	7.4	7.0	6.6	6.1	5.6
COP	4.37	4.22	4.04	3.86	3.73	3.64	3.45	3.25	2.98	2.82	2.65	2.54	2.46	2.26	2.06	1.84	1.61	1.35
Hi PR	229	219	211	202	197	193	186	178	171	163	157	153	150	144	139	133	128	124
Lo PR	83	77	72	66	63	60	55	49	44	40	35	32	31	26	23	19	17	13

High pressure is measured at the suction service valve (the larger valve).

Amps = Outdoor unit amps (comp.+ fan)

Low pressure is measured at the gauge port connection.

kW = Total system power

EXPANDED HEATING DATA (CONT.)

GSH140421A* / CA*F4860D6A**TXV / MBR2000**-1

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	49.8	47.1	44.4	41.5	39.6	38.4	35.6	32.9	31.2	28.8	26.6	25.1	24.1	21.7	19.2	16.8	14.3	11.7
DT	32.9	31.2	29.3	27.4	26.2	25.4	23.6	21.7	20.7	19.1	17.6	16.6	16.0	14.3	12.7	11.1	9.5	7.7
kW	3.20	3.14	3.08	3.02	3.0	2.96	2.91	2.85	2.89	2.83	2.77	2.73	2.71	2.65	2.59	2.53	2.46	2.40
Amps	16.1	14.4	13.1	11.9	11.2	10.9	9.9	9.1	8.4	7.8	7.1	6.8	6.6	5.9	5.1	4.4	3.6	2.6
COP	4.56	4.39	4.21	4.02	3.88	3.79	3.59	3.38	3.16	2.98	2.81	2.69	2.61	2.40	2.17	1.94	1.70	1.43
EER	15.6	15.0	14.4	13.7	13.3	13.0	12.3	11.5	10.8	10.2	9.6	9.2	8.9	8.2	7.4	6.6	5.8	4.9
Hi PR	222	213	205	196	191	188	180	173	166	158	152	148	146	140	135	129	125	120
Lo PR	82	76	71	66	62	60	55	49	44	39	35	32	31	26	23	19	17	13

GSH140481A* / CA*F4860D6A**TXV / MBR2000**-1

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	57.8	54.7	51.5	48.2	46.0	44.6	41.4	38.2	37.7	34.8	32.0	30.2	29.1	26.1	23.2	20.2	17.2	14.1
DT	34.5	32.7	30.8	28.8	27.5	26.6	24.7	22.8	22.5	20.8	19.1	18.1	17.4	15.6	13.8	12.1	10.3	8.4
kW	4.02	3.94	3.86	3.79	3.7	3.71	3.64	3.56	3.62	3.54	3.46	3.41	3.38	3.30	3.22	3.14	3.06	2.98
Amps	20.9	18.7	17.0	15.5	14.6	14.2	12.9	11.8	10.9	10.1	9.2	8.8	8.6	7.7	6.6	5.8	4.7	3.4
COP	4.21	4.07	3.90	3.72	3.60	3.52	3.33	3.14	3.05	2.88	2.71	2.59	2.52	2.32	2.10	1.88	1.65	1.38
EER	14.4	13.9	13.3	12.7	12.3	12.0	11.4	10.7	10.4	9.8	9.3	8.9	8.6	7.9	7.2	6.4	5.6	4.7
Hi PR	231	221	213	204	199	195	187	180	172	165	158	154	151	146	140	134	130	125
Lo PR	76	70	66	60	57	55	51	45	41	36	32	30	29	24	21	18	15	12

GSH140601A* / CA*F4860D6A* +TXV / MBR2000**-1

	Outdoor Ambient Temperature																	
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5	-10
MBh	69.1	65.5	61.6	57.6	55.0	53.3	49.5	45.7	41.0	37.9	34.9	32.9	31.7	28.4	25.2	22.0	18.8	15.4
DT	34.6	32.8	30.8	28.8	27.5	26.7	24.8	22.8	20.5	18.9	17.5	16.5	15.9	14.2	12.6	11.0	9.4	7.7
kW	4.21	4.12	4.04	3.96	3.9	3.87	3.79	3.71	3.71	3.62	3.54	3.49	3.45	3.36	3.28	3.20	3.11	3.02
Amps	19.3	17.8	16.7	15.6	15.1	14.8	13.9	13.2	12.6	12.0	11.4	11.2	11.0	10.4	9.7	9.1	8.4	7.5
COP	4.81	4.65	4.46	4.26	4.12	4.03	3.82	3.60	3.24	3.06	2.89	2.76	2.69	2.47	2.25	2.01	1.77	1.49
EER	16.4	15.9	15.2	14.6	14.1	13.8	13.1	12.3	11.1	10.5	9.9	9.4	9.2	8.5	7.7	6.9	6.0	5.1
Hi PR	228	219	210	201	197	193	185	178	170	163	156	152	150	144	139	133	128	124
Lo PR	74	68	64	59	55	53	49	44	39	35	31	29	28	23	20	17	15	12

High pressure is measured at the suction service valve (the larger valve).

Low pressure is measured at the gauge port connection.

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

PERFORMANCE RATINGS

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0181A*	AEPF183016A**+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1031670
	AEPF183016B**+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1277853
	AEPF183016C**+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1492587
	AEPF030-00*-1*		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890457
	AR*F193116A**+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1386360
	AR*F193116B**+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1492588
	ASPF183016A**+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.50	1288553
	ASPF183016B**+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.50	1492589
	AT*F193116A**+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1483540
	CA*F042*2**+MBE1200**-1+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890104
	CA*F042*2**+MBR0800**-1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	18,000	8.20	893640
	CA*F042*2**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890074
	CA*F042*2**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890287
	CA*F3131*6A**+MBE1200**-1+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890224
	CA*F3131*6A**+MBR0800**-1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	18,000	8.20	890314
	CA*F3131*6A**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1273320
	CA*F3131*6A**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890132
	CA*F3131*6A**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	890124
	CA*F3131*6A**+TXV	G*V950704C**	18,600	13,800	15.00	12.50	17,200	13,600	18,000	8.30	1032074
	CA*F3131*6B**+EEP+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1346706
	CA*F3131*6B**+MBE1200**-1+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1346700
	CA*F3131*6B**+MBR0800**-1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	18,000	8.20	1346701
	CA*F3131*6B**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1346702
	CA*F3131*6B**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1346703
	CA*F3131*6B**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1346704
	CA*F3131*6B**+TXV	G*V950704C**	18,600	13,800	15.00	12.50	17,200	13,600	18,000	8.30	1346705
	CA*F3131*6C**+EEP+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1386241
	CA*F3131*6C**+MBE1200**-1+TXV		18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1386243
	CA*F3131*6C**+MBR0800**-1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	18,000	8.20	1386245
	CA*F3131*6C**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1401052
	CA*F3131*6C**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1401053
	CA*F3131*6C**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	18,000	8.20	1401054
	CA*F3131*6C**+TXV	G*V950704C**	18,600	13,800	15.00	12.50	17,200	13,600	18,000	8.30	1401055
	CAPF3131*6A+EEP+TXV		19,000	14,100	14.00	12.00	17,600	13,900	18,000	8.30	1038379
	CHPF042B2**+MBR0800**-1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	18,000	8.20	1031665

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)		TVA Ratings ³		Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	
GSH14 0181A* (cont.)	CHPF042B2*+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	890035
	CHPF042B2*+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	890128
	CHPF2430B6A**+MBR0800**_1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	1031646
	CHPF2430B6A**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1273321
	CHPF2430B6A**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	890236
	CHPF2430B6A**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	890383
	CHPF2430B6A**+TXV		18,000	13,300	13.50	11.80	16,700	13,200	1293998
	CHPF2430B6B**+EEP+TXV		18,000	13,300	13.50	11.80	16,700	13,200	1347584
	CHPF2430B6B**+MBE1200**_1A**+TXV		18,600	13,800	15.00	12.50	17,200	13,600	1352849
	CHPF2430B6B**+MBR0800**_1A**+TXV		18,000	13,300	14.00	12.00	16,700	13,200	1330328
	CHPF2430B6B**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1347585
	CHPF2430B6B**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1330329
	CHPF2430B6B**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	1330330
	CSCF3036N6A**+MBR800**_1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	890322
	CSCF3036N6A**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1273322
	CSCF3036N6A**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	890350
	CSCF3036N6A**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	890285
	CSCF3036N6B**+MBR0800**_1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	1296854
	CSCF3036N6B**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1296641
	CSCF3036N6B**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1296642
	CSCF3036N6B**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	1296643
	CT*F3131*6A**+EEP+TXV		19,000	14,100	14.00	12.00	17,600	13,900	1449977
	CT*F3131*6A**+MBE1200**_1+TXV		18,000	13,300	15.00	12.50	16,700	13,200	1449978
	CT*F3131*6A**+MBR0800**_1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	1449979
	CT*F3131*6A**+TXV	G*E80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1449980
	CT*F3131*6A**+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	1449981
	CT*F3131*6A**+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	1449982
	CT*F3131*6A**+TXV	G*V950704C**	18,600	13,800	15.00	12.50	17,200	13,600	1449983
	H49F+MBR0800**_1+TXV		18,000	13,300	14.00	12.00	16,700	13,200	890116
	H49F+TXV	G*V80704B**	18,000	13,300	15.00	12.50	16,700	13,200	890049
	H49F+TXV	G*V950453B**	18,000	13,300	15.00	12.50	16,700	13,200	890409

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

Notes:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S, Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 024JA*	ADPF304216A**+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	1031666
	ADPF304216B**+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	1492590
	AEPF036-00*-1*		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	890324
	AEPF303616A**+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	1031650
	AEPF303616B**+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	1277864
	AEPF303616C**+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	1443958
	AR*F193116A**+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.50	1492395
	AR*F193116B**+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.50	1492591
	ARUF193116A**+TXV		24,000	18,200	14.00	12.50	22,200	18,000	24,000	8.50	1032064
	ASPF303616A**+TXV		24,000	18,200	15.00	12.50	22,200	18,000	22,000	8.50	1288554
	ASPF303616B**+TXV		24,000	18,200	15.00	12.50	22,200	18,000	22,000	8.50	1443985
	AT*F193116A**+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.50	1483541
	CA*F048*2*	G*V950453B**	23,600	17,900	14.00	12.00	21,800	17,700	23,600	8.20	890211
	CA*F048*2**+MBE1200**-.1+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	890304
	CA*F048*2**+MBR0800**-.1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.40	890171
	CA*F048*2**+TXV	G*V80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	890066
	CA*F3636*6A*	G*V90704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1328874
	CA*F3636*6A*	G*V950453B**	23,600	17,900	14.00	12.00	21,800	17,700	23,600	8.20	890335
	CA*F3636*6A**+EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1038375
	CA*F3636*6A**+MBE1200**-.1+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	890044
	CA*F3636*6A**+MBR0800**-.1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.40	890125
GSH14 024JA*	CA*F3636*6A**+TXV	G*E80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	1273323
	CA*F3636*6A**+TXV	G*V80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	890241
	CA*F3636*6A**+TXV	G*V950704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1328873
	CA*F3636*6B*	G*V90704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1347214
	CA*F3636*6B*	G*V950453B**	23,600	17,900	14.00	12.00	21,800	17,700	23,600	8.20	1347215
	CA*F3636*6B**+EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1346707
	CA*F3636*6B**+MBE1200**-.1+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	1346708
	CA*F3636*6B**+MBR0800**-.1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.40	1346709
	CA*F3636*6B**+TXV	G*E80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	1346710
	CA*F3636*6B**+TXV	G*V80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	1346711
	CA*F3636*6B**+TXV	G*V950704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1346712
	CA*F3642*6A**+EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1169092
	CA*F3743*6A**+EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1347216

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)			TVA Ratings ³		Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0241A* (cont.)	CHPF3636*6A**MBE1200**-1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	890090
	CHPF3636B6A**EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1038814
	CHPF3636B6A**MBR0800**-1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	1032324
	CHPF3636B6A**TXV	G*E80704B**	24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.40	1273324
	CHPF3636B6A**TXV	G*V80704B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890398
	CHPF3636B6A**TXV	G*V950453B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890047
	CHPF3636B6B**EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1330332
	CHPF3636B6B**MBE1200**-1A**TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	1330331
	CHPF3636B6B**MBR0800**-1A**TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.20	1330333
	CHPF3636B6B**TXV	G*E80704B**	24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.40	1347588
	CHPF3636B6B**TXV	G*V80704B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	1330334
	CHPF3636B6B**TXV	G*V950453B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	1330335
	CSCF3036N6A**TXV	G*E80704B**	24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.40	1273325
	CSCF3036N6A**TXV	G*V80704B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890411
	CSCF3036N6A**TXV	G*V950453B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890267
	CSCF3036N6B**TXV	G*E80704B**	24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.40	1296644
	CSCF3036N6B**TXV	G*V80704B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	1296645
	CSCF3036N6B**TXV	G*V950453B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	1296646
	CT*F3636*6A*	G*V90704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1449984
	CT*F3636*6A**MBE1200**-1+TXV		24,000	18,200	15.00	12.50	22,200	18,000	24,000	8.20	1449986
	CT*F3636*6A**MBR0800**-1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.40	1449987
H49F+TXV	CT*F3636*6A**TXV	G*E80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	1449989
	CT*F3636*6A**TXV	G*V80704B**	23,000	17,500	15.00	12.50	21,300	17,300	23,000	8.20	1449990
	CT*F3636*6A**TXV	G*V950453B**	23,600	17,900	14.00	12.00	21,800	17,700	23,600	8.20	1449985
	CT*F3636*6A**TXV	G*V950704C**	23,600	17,900	15.00	12.50	21,800	17,700	23,600	8.20	1449991
	CT*F3642*6A**EEP+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,800	8.50	1449992
	H49F+MBR0800**-1+TXV		24,000	18,200	14.00	12.00	22,200	18,000	24,000	8.40	890318
	H49F+TXV	G*V80704B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890188
	H49F+TXV	G*V950453B**	24,000	18,200	14.50	12.20	22,200	18,000	24,000	8.40	890413

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0301A*	ADPF304216A**+TXV		27,400	21,900	13.50	11.80	25,300	21,500	28,000	8.50	1293999
	ADPF304216B**+TXV		27,400	21,900	13.50	11.80	25,300	21,500	28,000	8.50	1492592
	AEPF183016A**+TXV		26,000	20,800	14.50	12.20	24,100	20,500	27,600	8.40	1346417
	AEPF303616A**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	1031671
	AEPF303616B**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	1277865
	AEPF303616C**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	1443959
	AEPT036-00*-I*		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	890431
	AR*F193116B**+TXV		28,000	22,400	14.00	12.00	25,900	22,000	26,600	8.30	1492593
	ARPF193116A*		28,000	22,400	14.00	12.00	25,900	22,000	26,600	8.30	1169091
	ARUF193116A**+TXV		28,000	22,400	14.00	12.00	25,900	22,000	26,600	8.30	1032068
	ASPF303616A**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	28,000	8.50	1288555
	ASPF303616B**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	28,000	8.50	1443986
	AT*F193116A**+TXV		28,000	22,400	14.00	12.00	25,900	22,000	26,600	8.30	1483542
	CA*F048*2**+MBR1200**-.1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	890302
	CA*F060*2**+MBE1600**-.1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	890110
	CA*F060*2**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	890033
	CA*F060*2**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	890120
	CA*F3642*6A*	G*V90704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	1328875
	CA*F3642*6A*	G*V90905D**	28,800	23,000	15.00	12.50	26,600	22,600	28,000	8.50	1328876
	CA*F3642*6A**+EEP+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	1038374
	CA*F3642*6A**+MBE1600**-.1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.50	1031648
	CA*F3642*6A**+MBR1200**-.1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.40	890208
	CA*F3642*6A**+MBR1600**-.1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	1032065
	CA*F3642*6A**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	1273350
	CA*F3642*6A**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	1273364
	CA*F3642*6A**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	890404
	CA*F3642*6A**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	890276
	CA*F3642*6A**+TXV	G*V950704C**	28,000	22,400	14.50	12.50	25,900	22,000	27,000	8.50	1032067
	CA*F3743*6A*	G*V90704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	1347217

¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F

² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F

⁴ HSPF = Heating Seasonal Performance Factor

Notes:

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low	
GSH14 0301A* (cont.)	CA*F3743*6A*	G*V90905D**	28,800	23,000	15.00	12.50	26,600	22,600	28,000	8.50	18,000	1347218
	CA*F3743*6A**+EEP+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1347219
	CA*F3743*6A**+MBE1600**-1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.50	16,800	1346713
	CA*F3743*6A**+MBR1200**-1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1347176
	CA*F3743*6A**+MBR1600**-1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1346714
	CA*F3743*6A**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1346715
	CA*F3743*6A**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1346716
	CA*F3743*6A**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1346717
	CA*F3743*6A**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1346718
	CA*F3743*6A**+TXV	G*V950704C**	28,000	22,400	14.50	12.50	25,900	22,000	27,000	8.50	18,000	1346719
	CHPF048D2**+MBE1600**-1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	16,800	1032315
	CHPF048D2**+MBR1600**-1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1032327
	CHPF048D2**+TXV	G*V80905C**	28,000	22,400	14.50	12.50	25,900	22,000	27,600	8.40	16,800	1032314
	CHPF048D2**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1032320
	CHPF048D2**+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1032318
	CHPF3642*6A**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1273351
	CHPF3642*6A**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1273365
	CHPF3642*6A**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890180
	CHPF3642*6A**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890226
	CHPF3642*6A**+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890070
	CHPF3642*6A**+EEP+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1044494
	CHPF3642C6A**+MBE1600**-1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	16,800	1032313
	CHPF3642C6A**+MBR1600**-1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1032321
	CHPF3642C6B**+MBE1600**-1A**+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.40	16,800	1330340
	CHPF3642C6B**+MBR1600**-1A**+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1330341
	CHPF3642C6B**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1347590
	CHPF3642C6B**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1347592
	CHPF3642C6B**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1330336
	CHPF3642C6B**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1330337
	CHPF3642C6B**+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1330338
	CHPF3642C6B+EEP+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1330339
	CSCF3642N6A**+MBR1600**-1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1031656
	CSCF3642N6A**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1273352
	CSCF3642N6A**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1273366
	CSCF3642N6A**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890405

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low	
GSH14 0301A* (cont.)	CSCF3642N6A**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890328
	CSCF3642N6A**+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890079
	CSCF3642N6C**+MBR1600**_1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1296594
	CSCF3642N6C**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1296587
	CSCF3642N6C**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1296588
	CSCF3642N6C**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1296589
	CSCF3642N6C**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1296590
	CSCF3642N6C**+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1296591
	CT*F3642*6A*	G*V90704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1449993
	CT*F3642*6A*	G*V90905D**	28,800	23,000	15.00	12.50	26,600	22,600	28,000	8.50	18,000	1449994
	CT*F3642*6A**+EEP+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1449995
	CT*F3642*6A**+MBE1600**_1+TXV		28,000	22,400	15.00	12.50	25,900	22,000	27,600	8.50	16,800	1449996
	CT*F3642*6A**+MBR1200**_1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	1449997
	CT*F3642*6A**+MBR1600**_1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,000	8.50	18,000	1449998
	CT*F3642*6A**+TXV	G*E80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1449999
	CT*F3642*6A**+TXV	G*E81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1450000
CT*F3642*6A**+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1450001	
CT*F3642*6A**+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	1450002	
CT*F3642*6A**+TXV	G*V950704C**	28,000	22,400	14.50	12.50	25,900	22,000	27,000	8.50	18,000	1450003	
H60F+MBR1600**_1+TXV		28,000	22,400	14.00	12.00	25,900	22,000	27,600	8.40	16,800	890158	
H60F+TXV	G*V80905C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890342	
H60F+TXV	G*V81155C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890367	
H60F+TXV	G*V950704C**	28,000	22,400	14.50	12.20	25,900	22,000	27,600	8.40	16,800	890216	
GSH14 0361A*	ADPF486016A**+TXV		34,000	24,100	13.50	11.80	31,500	23,900	32,600	8.30	22,000	1294000
	AEPF303616B**+TXV		33,400	23,700	14.50	12.20	30,900	23,500	34,600	8.75	21,600	1430202
	AEPF303616C**+TXV		33,400	23,700	14.50	12.20	30,900	23,500	34,600	8.75	21,600	1443960
	AEPF426016A**+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	1031644
	AEPF426016B**+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	1277854
	AEPF426016C**+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	1492594
	AEPF426016C**+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	890320
	AEPT060-00*-1*		35,000	24,900	15.00	12.50	32,400	24,200	32,600	8.30	22,000	1273422
	AR*F363616A**+TXV		34,400	24,400	13.50	11.80	31,800	24,200	32,600	8.30	22,000	1492595
	AR*F363616B**+TXV		34,400	24,400	13.50	11.80	31,800	24,200	32,600	8.30	22,000	1464051
AR*F364216A**+TXV		33,000	23,400	13.50	11.80	30,500	23,200	34,600	8.30	21,600	1486997	
AR*F364216B**+TXV		33,000	23,400	13.50	11.80	30,500	23,200	34,600	8.30	21,600	1486997	
AR*F374316B**+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	8.75	22,000	1492646	

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³		Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0361A* (cont.)	ARPF374316A**+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	8.75	1044503
	ARUF374316A**+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	9.00	1032069
	ASPF303616A**+TXV		34,200	24,300	14.50	12.00	31,600	24,000	34,600	9.00	1288556
	ASPF303616B**+TXV		34,200	24,300	14.50	12.00	31,600	24,000	34,600	9.00	1443987
	ASPF426016A**+TXV		35,000	24,900	15.00	13.00	32,400	24,600	34,600	9.00	1288557
	ASPF426016B**+TXV		35,000	24,900	15.00	13.00	32,400	24,600	34,600	9.00	1492596
	AT*F363616A**+TXV		34,400	24,400	13.50	11.80	31,800	24,200	32,600	8.30	1483543
	AT*F364216A**+TXV		33,000	23,400	13.50	11.80	30,500	23,200	34,600	8.30	1483563
	AT*F374316A**+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	8.75	1483544
	CA*F061*2**+MBE1600**-1+TXV		34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890402
	CA*F061*2**+MBE2000**-1+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890196
	CA*F061*2**+MBR1600**-1+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	890298
	CA*F061*2**+TXV	G*V81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890115
	CA*F061*2**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890274
	CA*F061*2**+TXV	G*V950704C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890101
	CA*F061*2**+TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890381
	CA*F061*2**+TXV	G*V951155D**	34,600	24,600	15.00	13.00	32,000	24,300	34,600	9.00	1031663
	CA*F4860*6A*	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1163817
	CA*F4860*6A**+EEP+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	8.75	1038369
	CA*F4860*6A**+MBE1600**-1+TXV		34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890437
	CA*F4860*6A**+MBE2000**-1+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890209
GSH14 0361A* (cont.)	CA*F4860*6A**+MBR1600**-1+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	890227
	CA*F4860*6A**+TXV	G*E80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1273353
	CA*F4860*6A**+TXV	G*E81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1273367
	CA*F4860*6A**+TXV	G*V80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890257
	CA*F4860*6A**+TXV	G*V81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890463
	CA*F4860*6A**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890054
	CA*F4860*6A**+TXV	G*V950704C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	890144
	CA*F4860*6A**+TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	890440
	CA*F4860*6A**+TXV	G*V951155D**	34,600	24,600	15.00	13.00	32,000	24,300	34,600	9.00	1031645
	CA*F4961*6A*	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1347220
	CA*F4961*6A**+EEP+TXV		36,000	25,600	14.00	12.00	33,300	25,300	34,600	8.75	1347221
	CA*F4961*6A**+MBE1600**-1+TXV		34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1346720
	CA*F4961*6A**+MBE2000**-1+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1346721
	CA*F4961*6A**+MBR1600**-1+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	1346722

See Notes on Page 24.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³				Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low			
GSH14 0361A* (cont.)	CA*F4961*6A**+TXV	G*E80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	21,600	1346723		
	CA*F4961*6A**+TXV	G*E81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	21,600	1346724		
	CA*F4961*6A**+TXV	G*V80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	21,600	1346725		
	CA*F4961*6A**+TXV	G*V81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	21,600	1346726		
	CA*F4961*6A**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	21,600	1346727		
	CA*F4961*6A**+TXV	G*V950704C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	21,600	1346728		
	CA*F4961*6A**+TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	21,600	1346729		
	CA*F4961*6A**+TXV	G*V951155D**	34,600	24,600	15.00	13.00	32,000	24,300	34,600	9.00	21,600	1347177		
	CHPF3642C6A**+MBE1600**-1+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	1278396		
	CHPF3743C6A**+MBE1600**-1A**+TXV		35,000	24,900	15.00	12.50	32,400	24,600	34,600	8.75	21,600	1347604		
	CHPF4860D6A**+EEP+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	22,000	1145048		
	CHPF4860D6A**+MBE1600**-1+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1145058		
	CHPF4860D6A**+MBE2000**-1A**+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1145314		
	CHPF4860D6A**+TXV	G*E80905C**	35,200	25,000	14.50	12.20	32,600	24,800	34,600	8.75	21,600	1294001		
	CHPF4860D6A**+TXV	G*V80905C**	35,200	25,000	14.50	12.20	32,600	24,800	34,600	8.75	21,600	1294002		
	CHPF4860D6A**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1145047		
	CHPF4860D6A**+TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1128622		
	CHPF4860D6A**+TXV	G*V951155D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1128625		
	CHPF4860D6C**+EEP+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	22,000	1330342		
	CHPF4860D6C**+MBE1600**-1A**+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1330343		
	CHPF4860D6C**+MBE2000**-1A**+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1330344		
CHPF4860D6C**+TXV	G*E80905C**	35,200	25,000	14.50	12.20	32,600	24,800	34,600	8.75	21,600	1347602			
CHPF4860D6C**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1330345			
CHPF4860D6C**+TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1330346			
CHPF4860D6C**+TXV	G*V951155D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	9.00	21,600	1330347			
CSCF4860N6A**+EEP+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	22,000	1145049			
CSCF4860N6A**+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	21,600	1128626			
CSCF4860N6A**+TXV	G*V951155D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	21,600	1128627			
CSCF4860N6C**+EEP+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	22,000	1296647			

- ¹ Seasonal Energy Efficiency Ratio; Certified per ARI 210/240 @ 80°F/ 67°F/ 95°F
² Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F
³ TVA Rating: BTU/h @ 75°F/ 63°F - 95°F
⁴ HSPF = Heating Seasonal Performance Factor
- Notes:**
- Always check the S&R plate for electrical data on the unit being installed.
 - When matching the outdoor unit to the indoor unit, use the piston supplied with the indoor unit.
 - EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)			TVA Ratings ³			Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0361A* (cont.)	CSCF4860N6C**TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1296648
	CSCF4860N6C**TXV	G*V951155D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1296649
	CT*F4860*6A*	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1450004
	CT*F4860*6A**MBE1600**-1+TXV		34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450005
	CT*F4860*6A**MBE2000**-1+TXV		34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1450006
	CT*F4860*6A**MBR1600**-1+TXV		34,600	24,600	14.00	12.00	32,000	24,300	34,600	8.75	1450007
	CT*F4860*6A**TXV	G*E80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450008
	CT*F4860*6A**TXV	G*E81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450009
	CT*F4860*6A**TXV	G*V80905C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450010
	CT*F4860*6A**TXV	G*V81155C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450011
	CT*F4860*6A**TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1450012
	CT*F4860*6A**TXV	G*V950704C**	34,600	24,600	14.50	12.20	32,000	24,300	34,600	8.75	1450013
GSH14 0421A*	CT*F4860*6A**TXV	G*V950905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1450014
	H61F+TXV	G*V90905D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1128623
	H61F+TXV	G*V951155D**	34,600	24,600	15.00	12.50	32,000	24,300	34,600	8.75	1128624
	ADPF486016A**TXV		38,500	30,000	13.50	11.80	35,600	29,500	39,500	9.00	1294003
	ADPF486016B**TXV		38,500	30,000	13.50	11.80	35,600	29,500	39,500	9.00	1492597
	AEPF426016A**TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	1031664
	AEPF426016B**TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	1277855
	AEPF426016C**TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	1492598
	AEPF426016C**TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	890338
	AEPT060-00*1*		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	1492647
	AR*F374316B**TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	1044501
	ARPF374316A**TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	1031668
GSH14 0421A*	ARUF374316A**TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	1288558
	ASPF426016A**TXV		39,500	30,800	15.00	12.50	36,500	30,300	40,000	9.00	1492599
	ASPF426016B**TXV		39,500	30,800	15.00	12.50	36,500	30,300	40,000	9.00	1483545
	AT*F374316A**TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	890337
	CA*F061*2**MBE2000**-1+TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	890260
	CA*F061*2**MBR2000**-1+TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	890072
	CA*F061*2**TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	890072
	CA*F061*2**TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	890250
	CA*F4860*6A**EHP+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	1038367
	CA*F4860*6A**MBE2000**-1+TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	890456
	CA*F4860*6A**MBR2000**-1+TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	890434
	CA*F4860*6A**TXV	G*V80905C**	39,500	30,800	14.50	12.50	36,500	30,300	39,500	8.75	1169090

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³				Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low			
GSH14 0421A* (cont.)	CA*F4860*6A**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890105		
	CA*F4860*6A**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890313		
	CA*F4961*6A**+EEP+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	25,000	1347222		
	CA*F4961*6A**+MBE2000**_1+TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1346730		
	CA*F4961*6A**+MBR2000**_1+TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	25,000	1347178		
	CA*F4961*6A**+TXV	G*V80905C**	39,500	30,800	14.50	12.50	36,500	30,300	39,500	8.75	24,000	1346731		
	CA*F4961*6A**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1346732		
	CA*F4961*6A**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1346733		
	CHPF060D2**+MBR2000**_1+TXV		39,500	30,800	14.00	12.50	36,500	30,300	39,500	9.00	25,000	890347		
	CHPF060D2**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890264		
	CHPF4860*6A**+MBE2000**_1+TXV		39,500	30,800	15.00	12.00	36,500	30,300	39,500	9.00	25,000	890025		
	CHPF4860*6A**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890117		
	CHPF4860*6A**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890280		
	CHPF4860D6A**+EEP+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	25,000	1046124		
	CHPF4860D6A**+MBR2000**_1+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	25,000	1031772		
	CHPF4860D6A**+TXV	G*V80704B**	39,500	30,800	14.50	12.50	36,500	30,300	39,500	8.75	24,000	1328877		
	CHPF4860D6C**+EEP+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	25,000	1330351		
	CHPF4860D6C**+MBE2000**_1A**+TXV		39,500	30,800	15.00	12.00	36,500	30,300	39,500	9.00	25,000	1330348		
	CHPF4860D6C**+MBR2000**_1A**+TXV		40,000	31,200	14.00	12.00	37,000	30,700	39,000	9.00	25,000	1330352		
	CHPF4860D6C**+TXV	G*V80704B**	39,500	30,800	14.50	12.50	36,500	30,300	39,500	8.75	24,000	1347603		
	CHPF4860D6C**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1330349		
	CHPF4860D6C**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1330350		
	CSCF4860N6A**+EEP+TXV		39,000	30,400	14.00	12.00	36,100	30,000	38,500	9.00	25,000	1145050		
	CSCF4860N6A**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1031657		
	CSCF4860N6A**+TXV	G*V951155D**	39,500	30,800	15.00	13.00	36,500	30,300	39,500	9.00	25,000	1031662		
	CSCF4860N6C**+EEP+TXV		39,000	30,400	14.00	12.00	36,100	30,000	38,500	9.00	25,000	1296650		
	CSCF4860N6C**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1296651		
	CSCF4860N6C**+TXV	G*V951155D**	39,500	30,800	15.00	13.00	36,500	30,300	39,500	9.00	25,000	1296652		
	CT*F4860*6A**+MBE2000**_1+TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1450015		
	CT*F4860*6A**+MBR2000**_1+TXV		39,500	30,800	14.00	12.00	36,500	30,300	39,500	9.00	25,000	1450016		
	CT*F4860*6A**+TXV	G*V80905C**	39,500	30,800	14.50	12.50	36,500	30,300	39,500	8.75	24,000	1450017		
	CT*F4860*6A**+TXV	G*V950905D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1450018		
	CT*F4860*6A**+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1450019		
	H61F+MBR2000**_1+TXV		39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	890349		
	H61F+TXV	G*V951155D**	39,500	30,800	15.00	12.50	36,500	30,300	39,500	9.00	25,000	1031654		

See Notes on Page 28.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³				Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low			
GSH14 0481A*	ADPF48601A**+TXV		46,000	34,000	13.50	11.75	42,600	33,700	46,000	8.50	30,000	890391		
	AEPF426016A**+TXV		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	1031651		
	AEPF426016B**+TXV		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	1277856		
	AEPF426016C**+TXV		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	1492600		
	AEPT060-00*-1*		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	890135		
	AR*F374316B**+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	1492648		
	AR*F486016A**+TXV		45,000	33,300	14.00	12.00	41,600	32,900	46,000	8.50	30,000	1438577		
	AR*F486016B**+TXV		45,000	33,300	14.00	12.00	41,600	32,900	46,000	8.50	30,000	1492601		
	ARPF374316A**+TXV		47,000	34,800	14.00	12.00	43,500	34,400	46,000	9.00	29,000	1044498		
	ARUF374316A**+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	1031655		
	ASPF426016A**+TXV		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	1288559		
	ASPF426016B**+TXV		45,500	33,700	15.00	12.50	42,100	33,300	46,000	8.75	30,000	1492602		
	AT*F374316A**+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	1483546		
	AT*F486016A**+TXV		45,000	33,300	14.00	12.00	41,600	32,900	46,000	8.50	30,000	1483547		
	CA*F061*2*	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890373		
	CA*F061*2**+MBE2000**-1+TXV		46,000	34,000	15.00	12.50	42,600	33,700	46,000	8.75	30,000	890426		
	CA*F061*2**+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890083		
	CA*F061*2**+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1031649		
	CA*F4860*6A*	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890265		
	CA*F4860*6A**+EEP+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	29,000	1038368		
	CA*F4860*6A**+MBE2000**-1+TXV		46,000	34,000	15.00	12.50	42,600	33,700	46,000	8.75	30,000	890449		
CA*F4860*6A**+MBR2000**-1+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	890119			
CA*F4860*6A**+TXV	G*V91155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890361			
CA*F4860*6A**+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890126			
CA*F4860*6A**+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1031667			
CA*F4961*6A*	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1347223			
CA*F4961*6A**+EEP+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	29,000	1347224			
CA*F4961*6A**+MBE2000**-1+TXV		46,000	34,000	15.00	12.50	42,600	33,700	46,000	8.75	30,000	1346734			
CA*F4961*6A**+MBR2000**-1+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	1347179			
CA*F4961*6A**+TXV	G*V91155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1346735			
CA*F4961*6A**+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1346736			
CA*F4961*6A**+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1346737			
CHPF060D2*	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890300			
CHPF4860D6A**+EEP+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	29,000	1046125			
CHPF4860D6A**+MBR2000**-1+TXV		46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890362			

See Notes on Page 28.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)				TVA Ratings ³				Heating Capacity (BTU/h)			ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	Low			
GSH14 0481A* (cont.)	CHPF4860D6A*+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1031660		
	CHPF4860D6C*+EHP+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	29,000	1330353		
	CHPF4860D6C*+MBR2000**-1A*+TXV		46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1330354		
	CHPF4860D6C*+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1330355		
	CSCF4860N6A*+MBR2000**-1+TXV		46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1031647		
	CSCF4860N6A*+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890133		
	CSCF4860N6A*+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890403		
	CSCF4860N6C*+MBR2000**-1+TXV		46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1296595		
	CSCF4860N6C*+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1296653		
	CSCF4860N6C*+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1296654		
	CT*F4860*6A*+MBE2000**-1+TXV		46,000	34,000	15.00	12.50	42,600	33,700	46,000	8.75	30,000	1450020		
	CT*F4860*6A*+MBR2000**-1+TXV		46,000	34,000	14.00	12.00	42,600	33,700	46,000	8.50	30,000	1450021		
	CT*F4860*6A*+TXV	G*V91155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1450022		
	CT*F4860*6A*+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1450023		
	CT*F4860*6A*+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	1450024		
	H61F	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.80	30,000	890189		
H61F+MBR2000**-1+TXV		46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890192			
H61F+TXV	G*V950905D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890323			
H61F+TXV	G*V951155D**	46,000	34,000	14.50	12.00	42,600	33,700	46,000	8.50	30,000	890242			
GSH14 0601A*	ADPF486016A*+TXV		55,000	41,800	13.50	11.80	50,900	41,200	55,000	8.50	34,000	1294004		
	AEPF426016A*+TXV		55,500	42,200	14.50	12.00	51,300	41,600	54,000	9.00	33,000	1031669		
	AEPF426016B*+TXV		55,500	42,200	14.50	12.00	51,300	41,600	54,000	9.00	33,000	1277857		
	AEPF426016C*+TXV		55,500	42,200	14.50	12.00	51,300	41,600	54,000	9.00	33,000	1492604		
	AEPT060-00*-1*		55,500	42,200	14.50	12.00	51,300	41,600	54,000	9.00	33,000	890240		
	AR*F496116A*+TXV		55,000	41,800	14.00	11.80	50,900	41,200	55,000	8.50	34,000	1492603		
	ARPF486016A*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	1186276		
	ARPF48601A*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	890395		
	ARPT061-00*-1*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	890406		
	ARUF061-00*-1*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	890148		
	ARUF486016A*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	1186277		
	ARUF48601A*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	890388		
	ASPF426016A*+TXV		55,500	42,200	14.50	12.00	51,300	41,600	56,000	8.75	33,000	1288560		
	ASPF426016B*+TXV		55,500	42,200	14.50	12.00	51,300	41,600	56,000	8.75	33,000	1492605		
	AT*F486016A*+TXV		55,500	42,200	13.50	11.50	51,300	41,600	55,000	8.50	33,000	1483548		
	CA*F061*2*+MBE2000**-1+TXV		55,500	42,200	15.00	12.50	51,300	41,600	54,000	9.00	33,000	890198		
	CA*F061*2*+MBR2000**-1+TXV		55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	33,000	890131		
	CA*F061*2*+TXV	G*V81155C**	55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	34,000	1032076		


See Notes on Page 28.

PERFORMANCE RATINGS (CONT.)

Outdoor Unit	Indoor Units		Cooling Capacity (BTU/h)			TVA Ratings ³			Heating Capacity (BTU/h)		ARI #
	Coil & Blower Units	Furnace	Total	Sens.	SEER ¹	EER ²	Total	Sens.	High	HSPF ⁴	
GSH14 0601A* (cont.)	CA*F061*2*+TXV	G*V951155D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	890344
	CA*F4860*6A**+EEP+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1038365
	CA*F4860*6A**+MBE2000**_1+TXV		55,500	42,200	15.00	12.50	51,300	41,600	54,000	9.00	890336
	CA*F4860*6A**+MBR2000**_1+TXV		55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	890334
	CA*F4860*6A**+TXV	G*V950905D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	890042
	CA*F4860*6A**+TXV	G*V951155D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.75	1032326
	CA*F4961*6A**+EEP+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1347225
	CA*F4961*6A**+MBE2000**_1+TXV		55,500	42,200	15.00	12.50	51,300	41,600	54,000	9.00	1346738
	CA*F4961*6A**+MBR2000**_1+TXV		55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	1347180
	CA*F4961*6A**+TXV	G*V950905D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	1346739
	CA*F4961*6A**+TXV	G*V951155D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.75	1346740
	CHPF060*2*+MBR2000**_1+TXV		55,500	42,200	14.00	12.50	51,300	41,600	54,000	8.50	890379
	CHPF060D2*+TXV	G*V950905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890427
	CHPF060D2*+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890073
	CHPF4860*6A**+MBE2000**_1+TXV		55,500	42,200	15.00	12.00	51,300	41,600	55,000	8.50	890248
	CHPF4860D6A**+EEP+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1046126
	CHPF4860D6A**+MBR2000**_1+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1031773
	CHPF4860D6A**+TXV	G*V950905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890270
	CHPF4860D6A**+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890368
	CHPF4860D6C**+EEP+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1330357
	CHPF4860D6C**+MBE2000**_1A**+TXV		55,500	42,200	15.00	12.00	51,300	41,600	55,000	8.50	1330356
	CHPF4860D6C**+MBR2000**_1A**+TXV		55,000	41,800	14.00	12.00	50,900	41,200	55,000	8.50	1330358
	CHPF4860D6C**+TXV	G*V950905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	1330359
	CHPF4860D6C**+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	1330360
	CSCF4860N6A**+MBR2000**_1+TXV		55,500	42,200	14.00	11.50	51,300	41,600	54,000	8.50	1031674
	CSCF4860N6A**+TXV	G*V90905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890022
	CSCF4860N6A**+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890164
	CSCF4860N6C**+MBR2000**_1+TXV		55,500	42,200	14.00	11.50	51,300	41,600	54,000	8.50	1296596
	CSCF4860N6C**+TXV	G*V90905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	1296655
	CSCF4860N6C**+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	1296656
	CT*F4860*6A**+MBE2000**_1+TXV		55,500	42,200	15.00	12.50	51,300	41,600	54,000	9.00	1450025
	CT*F4860*6A**+MBR2000**_1+TXV	G*V950905D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	1450026
	CT*F4860*6A**+TXV	G*V951155D**	55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.50	1450027
	CT*F4860*6A**+TXV		55,500	42,200	14.00	12.00	51,300	41,600	55,000	8.75	1450028
	H61F+MBR2000**_1+TXV		55,500	42,200	14.00	11.50	51,300	41,600	54,000	8.50	890380
	H61F+TXV	G*V90905D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890142
	H61F+TXV	G*V951155D**	55,500	42,200	13.50	11.50	51,300	41,600	54,000	8.50	890352

See Notes on Page 28.

DIMENSIONS

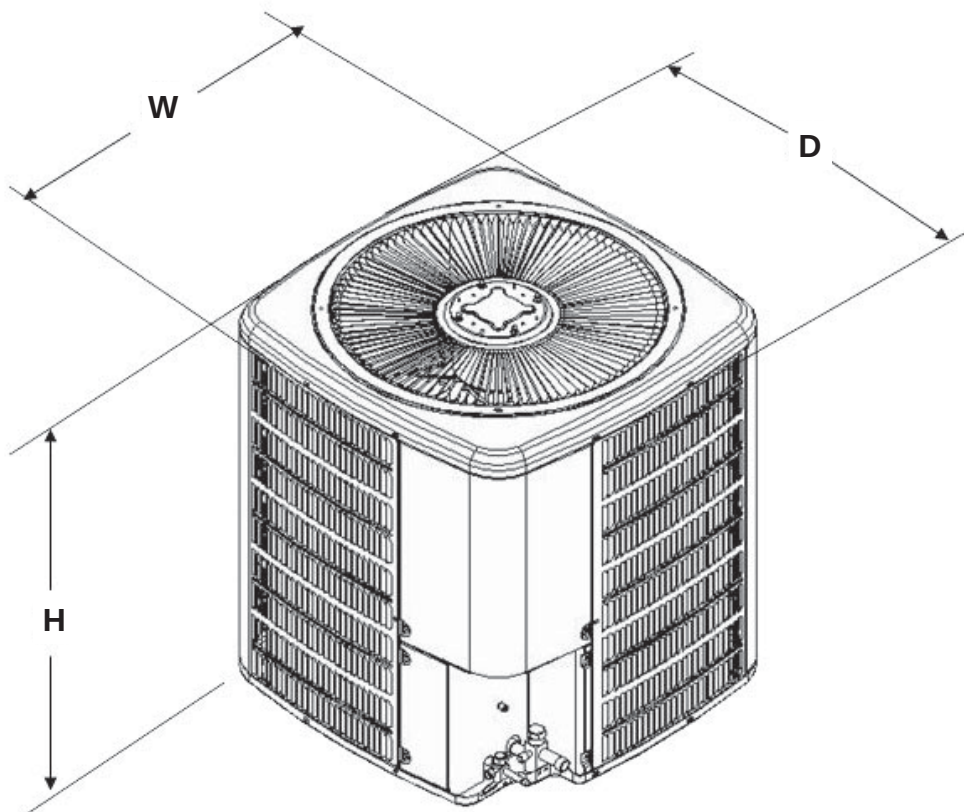

Model	Dimensions W x D x H
GSH140181A	29 x 29 x 34¼
GSH140241A	29 x 29 x 38¼
GSH140301A	29 x 29 x 38¼
GSH140361A	35½ x 35½ x 38¼
GSH140421A	35½ x 35½ x 38¼
GSH140481A	35½ x 35½ x 38¼
GSH140601A	35½ x 35½ x 38¼

ACCESSORIES

Model	Description	GSH14 018	GSH14 024	GSH14 030	GSH14 036	GSH14 042	GSH14 048	GSH14 060
ABK-20	Anchor Bracket Kit *	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
OT18-60A ²	Outdoor Thermostat	X	X	X	X	X	X	X
OY/EHR18-60	Emergency Heat Relay Kit	X	X	X	X	X	X	X
TX2N2 ³	TXV Kit	X						
TX3N2 ³	TXV Kit		X	X	X			
TX5N2 ³	TXV Kit					X	X	X

* Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Required for heat pump applications where ambient temperatures fall below 0 °F with 50% or higher relative humidity.

³ Field-installed, non-bleed, expansion valve kit

NOTES