



COOLING CAPACITIES: 24,000 TO 56,800 BTU/H
HEATING CAPACITIES: 46,000 TO 138,000 BTU/H

PRODUCT SPECIFICATIONS

GPG13

13 SEER/ 80% AFUE

2 – 5 TON SINGLE-PHASE, SELF-CONTAINED PACKAGED GAS/ELECTRIC



The GPG13 Packaged Gas/Electric Unit features energy-efficient cooling and heating performance in one self-contained unit. It is housed in a heavy-gauge, galvanized-steel cabinet with a high-quality, UV-resistant powderpaint finish. This unit allows for a ground-level or rooftop mount and horizontal or downflow applications.

Standard Features

- High-efficiency compressor; two-stage compressor on 5-ton Rev AA models only
- Copper tube/aluminum fin coil with flowrater expansion device; TXV on 5-ton models only
- Recirculating blower motor: PSC type on 2 to 3½ ton; ECM type on 4 and 5 ton
- Fully charged R-22 system
- Durable, corrosion-resistant T-140 aluminized steel tubular heat exchanger
- Redundant gas valve, natural gas and easy conversion to propane
- Power-assisted combustion
- Direct spark ignition system includes a microprocessorbased control for the entire ignition sequence, all blower operation, and all safety circuits complete with self-diagnostics
- California Low NOx approved

Cabinet Features

- High-quality UV-resistant powder-paint finish
- Horizontal or downflow application
- Convenient access panels
- One roof curb fits all units
- Fully insulated cabinet
- Bottom, 2" high base rails for easier handling
- All GPG13 models fit in a standard-size pick-up truck
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Contents

Nomenclature	2
Product Specifications	3
Evaporator Blower Specifications	6
Expanded Cooling Data	10
Dimensions	24
Wiring Diagrams	25
Accessories	35

NOMENCLATURE

	G	P	G	13	24	045	3	A	
	1	2	3	4,5	6,7	8, 9, 10	11	12	
Brand									
G Klimate									Engineering
									Revisions
Product Category									
P Packaged Unit									
									Electrical
Unit Type									1 208-230/1/60
G Gas/Electric									3 208-230/3/60
Efficiency									
13 13 SEER									
15 15 SEER									
									Heat Input
Nominal Capacity									45 46 MBTU/h
24 2 Tons									70 69 MBTU/h
30 2½ tons									90 92 MBTU/h
36 3 Tons									115 115 MBTU/h
									140 138 MBTU/h

SPECIFICATIONS

	GPG13240451A	GPG13240701A	GPG13300451A	GPG13300701A	GPG13360451A
Cooling Capacity (BTU/h)					
Total	24,000	24,000	29,000	29,000	35,400
Sensible	18,200	18,200	22,600	22,600	27,300
SEER/EER	13.0/11.3	13.0/11.3	13.0/11.3	13.0/11.3	13.0/11.3
Decibels	76.0	76.0	76.0	76.0	76.0
Heating Capacity (BTU/h)					
Input	46,000	69,000	46,000	69,000	46,000
Output	36,700	55,000	36,700	55,000	36,700
AFUE	80.0	80.0	80.0	80.0	80.0
Temperature Rise Range	30 - 60	35 - 65	30 - 60	35 - 65	30 - 60
No. of Burners	2	3	2	3	2
Orifice Size (Natural/Propane)	43" / 55"	43" / 55"	43" / 55"	43" / 55"	43" / 55"
Evaporator Motor					
Type	DD	DD	DD	DD	DD
Wheel (D x W)	10" x 8"	10" x 8"	10" x 8"	10" x 8"	10" x 9"
Indoor Nominal CFM	750	750	1,000	1,000	1,200
Motor Speed Tap (Cooling)	Med	Med	Med	Med	High
RPM/Amps (Cooling)	970/1.1	970/1.1	1,000/1.4	1,000/1.4	1,070/2.3
Horsepower - RPM	1/4 - 1,080	1/4 - 1,080	1/3 - 1,080	1/3 - 1,080	1/3 - 1,080
Evaporator Coil					
Face Area (ft²)	4.33	4.33	4.33	4.33	4.33
Rows Deep/Fins per Inch	3 / 14	3 / 14	3 / 14	3 / 14	4 / 14
Piston Size (Cooling)	0.059"	0.059"	0.068"	0.068"	0.071"
Filter Size (ft²)	2.7	2.7	3.3	3.3	4.2
Drain Size (NPT)	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Charge (oz.)	70	70	77	77	110
Condenser Fan					
Horsepower - RPM	1/6 - 850	1/6 - 850	1/4 - 1,075	1/4 - 1,075	1/4 - 1,075
Fan Diameter/No. of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 3
Outdoor Nominal CFM	2,400	2,400	2,700	2,700	2,700
Condenser Coil					
Face Area (ft²)	12.4	12.4	12.4	12.4	12.4
Rows Deep/Fins per Inch	1 / 19	1 / 19	1 / 19	1 / 19	2 / 16
Electrical Data					
Voltage/Phase/Frequency	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60
Compressor RLA/LRA	9.2 / 43.0	9.2 / 43.0	10.3 / 49.0	10.3 / 49.0	14.1 / 61.0
Indoor Blower FLA/LRA	1.5 / 2.2	1.5 / 2.2	2.4 / 2.6	2.4 / 2.6	3.0/3.3
Outdoor Fan RLA/LRA	0.8 / 1.7	0.8 / 1.7	1.8 / 3.8	1.8 / 3.8	1.8 / 3.8
Total Unit Amps	9.2	9.2	11.7	11.7	13.1
Min. Circuit Ampacity	13.8	13.8	16.6	16.6	21.6
Max. Overcurrent Device	20	20	20	20	30
Entrance Size Power Supply	1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Entrance Size Control Voltage	7/8"	7/8"	7/8"	7/8"	7/8"
Operating Weight (lbs)	412	417	415	420	449
Ship Weight (lbs)	435	439	438	442	470

PRODUCT SPECIFICATIONS

SPECIFICATIONS (CONT.)

	GPG13360701A	GPG13360901A	GPG13420701A	GPG13420901A	GPG13480701A
Cooling Capacity (BTU/h)					
Total	35,400	35,400	41,600	41,600	47,200
Sensible	27,300	27,300	32,000	32,000	36,600
SEER/EER	13.0 / 11.3	13.0 / 11.3	13.0 / 11.3	13.0 / 11.3	13.0 / 11.3
Decibels	76.0	76.0	76.0	76.0	76.0
Heating Capacity (BTU/h)					
Input	69,000	92,000	69,000	92,000	69,000
Output	55,000	72,900	55,000	72,900	55,000
AFUE	80.0	80.0	80.0	80.0	80.0
Temperature Rise Range	35 - 65	45 - 75	35 - 65	45 - 75	35 - 65
No. of Burners	3	4	3	4	3
Orifice Size (Natural/Propane)	43" / 55"	43" / 55"	43" / 55"	43" / 55"	43" / 55"
Evaporator Motor					
Type	DD	DD	DD	DD	ECM
Wheel (D x W)	10" x 9"	10" x 9"	10" x 10"	10" x 10"	11" x 10"
Indoor Nominal CFM	1,200	1,200	1,350	1,350	1,510
Motor Speed Tap (Cooling)	High	High	Medium	Medium	"B" Mode
RPM/Amps (Cooling)	1,070/2.3	1,070/2.3	940/2.5	940/2.5	990/3.1
Horsepower - RPM	1/3 - 1,080	1/3 - 1,080	1/3 - 1,080	1/3 - 1,080	3/4 - 1,100
Evaporator Coil					
Face Area (ft²)	4.33	4.33	5.67	5.67	5.67
Rows Deep/Fins per Inch	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14
Piston Size (Cooling)	0.071"	0.071"	0.078"	0.078"	0.080"
Filter Size (ft²)	4.2	4.2	4.7	4.7	5.1
Drain Size (NPT)	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Charge (oz.)	110	110	101	101	130
Condenser Fan					
Horsepower - RPM	1/4 - 1,075	1/4 - 1,075	1/4 - 1,075	1/4 - 1,075	1/3 - 1,075
Fan Diameter/No. of Blades	22" / 3	22" / 3	22" / 3	22" / 3	22" / 4
Outdoor Nominal CFM	2,700	2,700	2,700	2,700	3,500
Condenser Coil					
Face Area (ft²)	12.4	12.4	15.3	15.3	15.3
Rows Deep/Fins per Inch	2 / 16	2 / 16	1 / 19	1 / 19	2 / 16
Electrical Data					
Voltage/Phase/Frequency	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60
Compressor RLA/LRA	14.1 / 61.0	14.1 / 61.0	16.6 / 95.0	16.6 / 95.0	18.0 / 104.0
Indoor Blower FLA/LRA	3.0 / 3.3	3.0 / 3.3	3.0 / 4.5	3.0 / 4.5	6.0 / 12.2
Outdoor Fan RLA/LRA	1.8 / 3.8	1.8 / 3.8	1.8 / 3.8	1.8 / 3.8	2.4 / 5.2
Total Unit Amps	13.1	13.1	16.6	16.6	18.5
Min. Circuit Ampacity	21.6	21.6	25.6	25.6	30.9
Max. Overcurrent Device	30	30	40	40	40
Entrance Size Power Supply	1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Entrance Size Control Voltage	7/8"	7/8"	7/8"	7/8"	7/8"
Operating Weight (lbs)	453	458	493	496	518
Ship Weight (lbs)	475	480	515	520	540

SPECIFICATIONS (CONT.)

	GPG13480901A	GPG13481151A	GPG13600901A	GPG13601151A	GPG13601401A
Cooling Capacity (BTU/h)					
Total	47,200	47,200	56,800	56,800	56,800
Sensible	36,600	36,600	42,800	42,800	42,800
EER	11.3	11.3	10.3	10.3	10.3
Low-Stage Cooling Capacity					
Total	N/A	N/A	42,800	42,800	42,800
Sensible	N/A	N/A	32,400	32,400	32,400
SEER/EER	13.0/N/A	13.0/N/A	13.0/11.3	13.0/11.3	13.0/11.3
Decibels	76.0	76.0	76.0	76.0	76.0
Heating Capacity (BTU/h)					
Input	92,000	115,000	92,000	115,000	138,000
Output	72,900	91,200	72,900	91,200	110,200
AFUE	80.0	80.0	80.0	80.0	80.0
Temperature Rise Range	45 - 75	45 - 75	45 - 75	45 - 75	45 - 75
No. of Burners	4	5	4	5	6
Orifice Size (Natural/Propane)	43" / 55"	43" / 55"	43" / 55"	43" / 55"	43" / 55"
Evaporator Motor					
Type	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	11" x 10"	11" x 10"	11" x 10"	11" x 10"	11" x 10"
Indoor Nominal CFM	1,510	1,510	1,810	1,810	1,810
Motor Speed Tap (Cooling)	"B" Mode	"B" Mode	"A" Mode	"A" Mode	"A" Mode
RPM/Amps (Cooling)	990/3.1	990/3.1	1,080/4.7	1,080/4.7	1,080/4.7
Horsepower - RPM	3/4 - 1,100	3/4 - 1,100	1 - 1,100	1 - 1,100	1 - 1,100
Evaporator Coil					
Face Area (ft²)	5.67	5.67	5.67	5.67	5.67
Rows Deep/Fins per Inch	4 / 14	4 / 14	4 / 14	4 / 14	4 / 14
Piston Size (Cooling)	0.080"	0.080"	TXV	TXV	TXV
Filter Size (ft²)	5.1	5.1	6.3	6.3	6.3
Drain Size (NPT)	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Charge (oz.)	130	130	142	142	142
Condenser Fan					
Horsepower - RPM	1/3 - 1,075	1/3 - 1,075	1/3 - 1,075	1/3 - 1,075	1/3 - 1,075
Fan Diameter/No. of Blades	22" / 4	22" / 4	22" / 4	22" / 4	22" / 4
Outdoor Nominal CFM	3,500	3,500	3,500	3,500	3,500
Condenser Coil					
Face Area (ft²)	15.3	15.3	15.3	15.3	15.3
Rows Deep/Fins per Inch	2 / 16	2 / 16	2 / 16	2 / 16	2 / 16
Electrical Data					
Voltage/Phase/Frequency	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60	208-230/1/60
Compressor RLA/LRA	18.0 / 104.0	18.0 / 104.0	25.0 / 148.0	25.0 / 148.0	25.0 / 148.0
Indoor Blower FLA/LRA	6.0 / 12.2	6.0 / 12.2	7.0 / 12.2	7.0 / 12.2	7.0 / 12.2
Outdoor Fan RLA/LRA	2.4 / 5.2	2.4 / 5.2	2.4 / 5.2	2.4 / 5.2	2.4 / 5.2
Total Unit Amps	18.5	18.5	23.1	23.1	23.1
Min. Circuit Ampacity	30.9	30.9	41.3	41.3	41.3
Max. Overcurrent Device	40	40	50	50	50
Entrance Size Power Supply	1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"
Entrance Size Control Voltage	7/8"	7/8"	7/8"	7/8"	7/8"
Operating Weight (lbs)	523	528	533	538	543
Ship Weight (lbs)	545	550	555	560	565

PRODUCT SPECIFICATIONS

EVAPORATOR BLOWER SPECIFICATIONS WITH PSC MOTORS

GP613— 2-Ton MODELS

Motor Speed	High				Med				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,190	380	823	1.67	850	230	647	1.02	600	150	514	0.67
0.2	1,140	360	845	1.62	830	220	690	1.00	570	140	585	0.65
0.3	1,080	350	878	1.58	765	215	740	0.97	510	130	654	0.63
0.4	1,025	340	907	1.54	715	210	784	0.94	450	125	728	0.61
0.5	975	330	933	1.38	660	205	834	0.90	380	120	801	0.58
0.6	920	310	945	1.37	610	195	888	0.88	-	-	-	-
0.7	830	300	961	1.35	-	-	-	-	-	-	-	-
0.8	730	290	978	1.32	-	-	-	-	-	-	-	-

GP613— 2½-Ton AA MODELS

Speed	High				Med-High				Med-Low				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,460	540	955	2.39	1,370	500	900	2.15	1,160	420	779	1.82	920	325	657	1.43
0.2	1,420	520	972	2.32	1,330	485	927	2.10	1,130	400	828	1.76	890	310	712	1.40
0.3	1,340	500	100	2.24	1,270	470	955	2.05	1,100	390	867	1.70	870	300	769	1.36
0.4	1,285	480	1,016	2.16	1,210	450	988	1.95	1,045	375	905	1.64	850	290	817	1.32
0.5	1,230	460	1,032	2.07	1,160	430	1,005	1.88	1,000	360	939	1.58	800	280	867	1.25
0.6	1,145	430	1,051	1.98	1,080	405	1,032	1.79	950	345	970	1.46	-	-	-	-
0.7	1,070	410	1,066	1.90	1,000	385	1,050	1.70	880	330	997	1.42	-	-	-	-
0.8	980	390	1,079	1.80	920	360	1,064	1.72	810	315	1,021	1.39	-	-	-	-

GP613— 2½-Ton AB MODELS

Motor Speed	High				Med				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,370	509	899	2.23	1,261	452	840	1.95	1,056	350	723	1.51
0.2	1,310	492	926	2.13	1,221	442	867	1.9	1,010	339	773	1.43
0.3	1,262	489	942	2.09	1,174	428	899	1.84	971	343	800	1.45
0.4	1,208	475	963	2.06	1,125	414	921	1.8	937	329	836	1.41
0.5	1,140	453	982	1.93	1,063	398	948	1.7	878	318	852	1.27
0.6	1,081	440	999	1.9	1,004	380	971	1.66	811	306	917	1.29
0.7	1,006	425	1,017	1.88	919	368	998	1.59	723	291	960	1.21
0.8	879	403	1,043	1.74	796	371	1,033	1.46	545	259	1,013	1.1

GP613— 3-Ton AA MODELS

Speed	High				Med-High				Med-Low				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,590	550	950	2.41	1,470	510	894	2.25	1,230	410	784	1.91	965	315	652	1.44
0.2	1,530	525	972	2.31	1,430	480	922	2.16	1,210	400	828	1.79	945	310	713	1.42
0.3	1,480	510	1,003	2.24	1,380	460	961	2.04	1,175	385	867	1.73	925	300	773	1.35
0.4	1,410	480	1,016	2.14	1,320	440	983	1.97	1,120	370	906	1.67	890	295	828	1.30
0.5	1,325	460	1,032	2.07	1,260	430	1,000	1.89	1,070	355	939	1.61	845	290	883	1.24
0.6	1,290	440	1,048	2.02	1,200	395	1,015	1.82	1,010	330	968	1.51	765	260	932	1.15
0.7	1,170	400	1,060	1.88	1,095	365	1,028	1.70	890	300	1,000	1.36	655	240	985	1.07
0.8	950	345	1,075	1.69	900	320	1,041	1.50	720	270	1,031	1.22	515	210	1,020	0.97

EVAPORATOR BLOWER SPECIFICATIONS WITH PSC MOTORS (CONT.)

GP613— 3-Ton AB Models

Motor Speed	High				Med				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,462	596	957	2.58	1,337	471	885	2.08	1,029	346	732	1.51
0.2	1,398	563	972	2.53	1,265	452	921	2.01	982	334	775	1.46
0.3	1,326	550	988	2.47	1,227	448	934	1.97	946	329	808	1.4
0.4	1,260	534	1,002	2.39	1,159	429	955	1.87	888	313	846	1.38
0.5	1,188	513	1,012	2.34	1,073	405	980	1.73	823	304	891	1.29
0.6	1,090	496	1,034	2.27	1,008	393	997	1.71	750	287	932	1.23
0.7	997	478	1,047	2.2	895	371	1,025	1.61	668	271	971	1.16
0.8	852	454	1,064	2.16	760	346	1,050	1.49	454	238	1,017	1

GP613— 3½-Ton Models

Motor Speed	High				Med				Low			
E.S.P.	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,575	585	934	2.64	1,450	480	862	2.15	1,100	340	709	1.55
0.2	1,515	565	951	2.58	1,390	460	894	2.06	1,040	325	760	1.49
0.3	1,430	550	974	2.50	1,300	445	922	1.98	1,000	320	816	1.44
0.4	1,340	525	995	2.42	1,215	425	950	1.89	925	305	848	1.38
0.5	1,240	505	1,005	2.34	1,115	395	967	1.79	860	290	887	1.32
0.6	1,130	465	1,030	2.22	1,030	375	1,000	1.71	800	275	920	1.22
0.7	1,010	450	148	2.18	945	350	1,028	1.60	690	255	964	1.16
0.8	910	430	1,064	2.12	860	335	1,038	1.54	-	-	-	-

EVAPORATOR BLOWER SPECIFICATIONS WITH X-13 MOTORS

GP613— 4-Ton AB Models — COOLING

Speed	T4 (Cooling Speed)				T5 (Cooling Speed)			
E.S.P	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	-	-	-	-	-	-	-	-
0.2	1,593	449	884	3.55	1,699	532	921	4.22
0.3	1,545	463	905	3.69	1,654	539	944	4.25
0.4	1,506	476	934	3.82	1,610	551	969	4.3
0.5	1,448	481	950	3.87	1,545	557	989	4.36
0.6	1,400	493	972	3.95	1,512	566	1,002	4.41
0.7	1,341	502	991	4.03	1,433	578	1,019	4.59
0.8	1,289	511	1,013	4.11	1,392	591	1,036	4.65

GP613— 5-Ton BA Models — COOLING

Speed	T4 (Cooling Speed)				T5 (Cooling Speed)			
E.S.P	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,942	649	993	4.83	2,067	792	1,054	5.81
0.2	1,883	657	1,010	4.87	2,030	811	1,077	5.85
0.3	1,859	670	1,029	4.96	1,982	814	1,088	5.88
0.4	1,827	675	1,047	4.97	1,909	808	1,101	5.86
0.5	1,749	683	1,069	4.99	1,842	798	1,110	5.85
0.6	1,706	693	1,083	5.1	1,789	772	1,117	5.65
0.7	1,655	703	1,104	5.12	1,703	763	1,129	5.58
0.8	1,588	705	1,120	5.11	1,618	732	1,135	5.29

GP613— 4-Ton AB Models — HEATING

Speed	T1 (Heating Speed)				T2 (Heating Speed)				T3 (Heating Speed)			
E.S.P	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	-	-	-	-	-	-	-	-	-	-	-	-
0.2	914	125	611	1.07	1,105	186	686	1.56	1,397	323	801	2.57
0.3	822	134	652	1.14	1,024	193	712	1.6	1,346	331	828	2.67
0.4	733	140	691	1.2	967	202	747	1.65	1,288	342	845	2.76
0.5	664	150	733	1.26	884	214	786	1.76	1,273	352	855	2.82
0.6	606	154	765	1.28	816	220	818	1.78	1,178	359	889	2.88
0.7	584	162	792	1.32	769	230	854	1.85	1,120	369	925	2.97
0.8	551	164	801	1.34	698	236	880	1.89	1,057	381	941	3.09

PRODUCT SPECIFICATIONS

EVAPORATOR BLOWER SPECIFICATIONS WITH X-13 MOTORS (CONT.)

GPG13- 5-Ton BA Models — HEATING

Speed	T1 (Heating Speed)				T2 (Heating Speed)				T3 (Heating Speed)			
E.S.P	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps	CFM	Watts	RPM	Amps
0.1	1,125	162	645	1.44	1,466	315	783	2.67	1,780	496	914	3.33
0.2	1,049	168	678	1.53	1,384	322	817	2.74	1,730	506	937	3.89
0.3	1,000	178	708	1.6	1,347	329	839	2.78	1,664	520	955	4.01
0.4	910	184	741	1.64	1,291	341	865	2.83	1,608	526	977	4.03
0.5	857	197	783	1.75	1,237	350	894	2.9	1,568	532	997	4.12
0.6	809	201	807	1.83	1,185	362	921	3.05	1,515	546	1,020	4.14
0.7	739	207	838	1.86	1,134	369	945	3.09	1,477	552	1,040	4.18
0.8	703	218	869	1.96	1,087	382	976	3.21	1,422	562	1,062	4.23

EVAPORATOR BLOWER SPECIFICATIONS WITH ECM MOTORS

GPG13—4-Ton AA Models

Cooling Speed	Adjust Tap	CFM ¹	Heating Speed	Adjust Tap	CFM ¹
D	Minus	969	D	Minus	867
D	Normal	1,140	D	Normal	1,020
D	Plus	1,254	D	Plus	1,122
C	Minus	1,139	C	Minus	969
C	Normal	1,340	C	Normal	1,140
C	Plus	1,474	C	Plus	1,254
B	Minus	1,309	B	Minus	1,207
B	Normal	1,540	B	Normal	1,420
B	Plus	1,694	B	Plus	1,562
A	Minus	1,539	A	Minus	1,445
A	Normal	1,810	A	Normal	1,700
A	Plus	1,991	A	Plus	1,870

¹ @ 0.1 - 0.5 ESP

GPG13—5-Ton AA Models

Cooling Speed	Adjust Tap	CFM ¹	Heating Speed	Adjust Tap	CFM ¹
D	Minus	969	D	Minus	969
D	Normal	1,140	D	Normal	1,140
D	Plus	1,254	D	Plus	1,254
C	Minus	1,139	C	Minus	1,207
C	Normal	1,340	C	Normal	1,420
C	Plus	1,474	C	Plus	1,562
B	Minus	1,309	B	Minus	1,445
B	Normal	1,540	B	Normal	1,700
B	Plus	1,694	B	Plus	1,870
A	Minus	1,539	A	Minus	1,539
A	Normal	1,810	A	Normal	1,810
A	Plus	1,991	A	Plus	1,991

¹ @ 0.1 - 0.5 ESP


SPEED TAP BOARD FOR 4- AND 5-TON MODELS (WITH FACTORY SETTINGS)

Models	Dip Switch Position							
	Heat				Cool			
	1	2	3	4	5	6	7	8
GPG13480701	ON	ON	OFF	OFF	ON	OFF	OFF	OFF
GPG13480901	OFF	ON	OFF	OFF	ON	OFF	OFF	OFF
GPG13481151	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
GPG13600901	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF
GPG13601151	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
GPG13601401	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF

Note: Disconnect power to unit before moving jumper to prevent damage to TAP board.

Adjust Tap: Normal: 7 OFF, 8 OFF ; Minus: 7 OFF, 8 ON ; Plus: 7 ON, 8 OFF

EVAPORATOR BLOWER SPECIFICATIONS (CONT.)

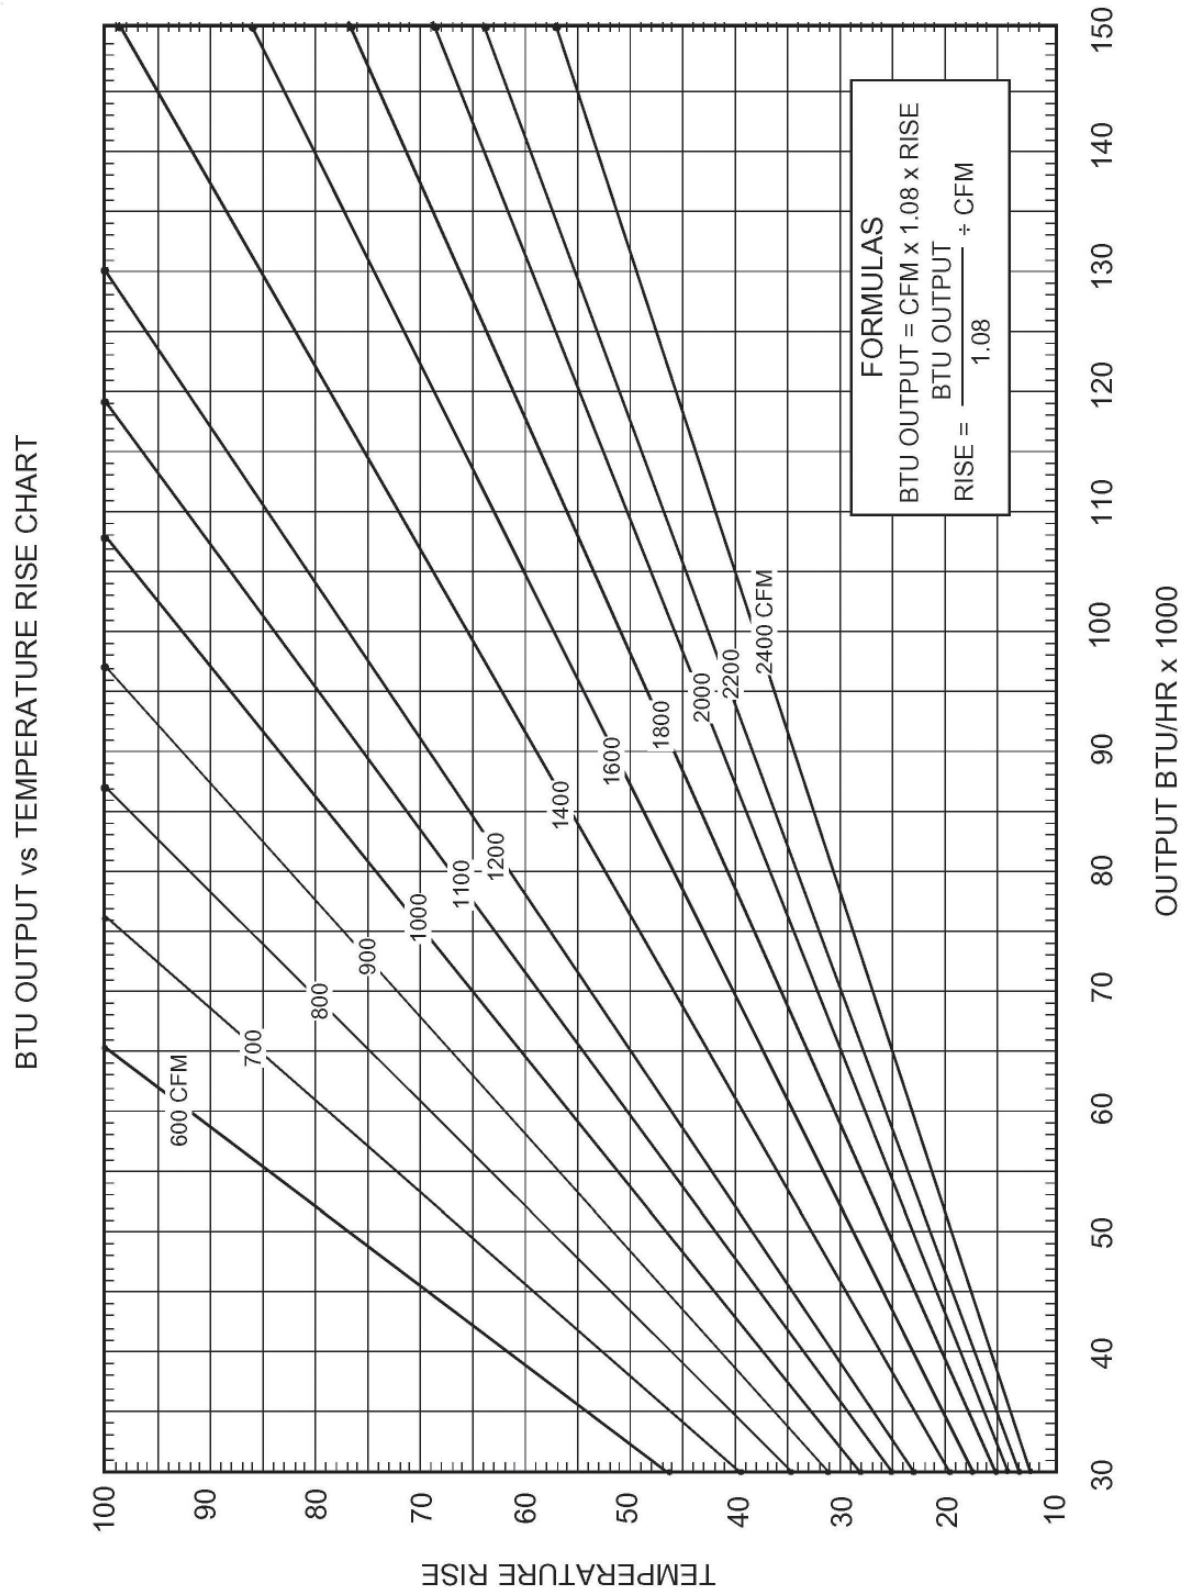

EXPANDED COOLING DATA — GPG1324***1A

		Outdoor Ambient Temperature																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		Entering Indoor Wet Bulb Temperature																								
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	850	MBh	23.5	24.4	26.7	-	23.0	23.8	26.1	-	22.4	23.2	25.5	-	21.9	22.7	24.8	-	20.8	21.5	23.6	-	19.3	20.0	21.9	-
		S/T	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.84	0.70	0.48	-	0.87	0.72	0.50	-	0.87	0.73	0.51	-
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-
		kW	1.67	1.70	1.76	-	1.79	1.83	1.89	-	1.90	1.94	2.00	-	2.00	2.04	2.11	-	2.08	2.13	2.19	-	2.15	2.20	2.27	-
		Amps	6.9	7.0	7.2	-	7.3	7.5	7.7	-	7.9	8.1	8.3	-	8.4	8.6	8.8	-	8.9	9.1	9.3	-	9.3	9.6	9.8	-
		Hi PR	146	157	166	-	164	177	186	-	187	201	212	-	213	229	242	-	239	257	272	-	264	284	300	-
		Lo PR	65	69	76	-	69	73	80	-	71	76	83	-	75	80	87	-	79	84	91	-	81	86	94	-
		MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.2	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-
		ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	20	18	13	-	19	17	13	-
70	750	kW	1.66	1.69	1.74	-	1.78	1.82	1.87	-	1.89	1.93	1.99	-	1.98	2.03	2.09	-	2.06	2.11	2.18	-	2.13	2.18	2.25	-
		Amps	6.8	7.0	7.1	-	7.3	7.4	7.7	-	7.8	8.0	8.2	-	8.3	8.5	8.8	-	8.8	9.0	9.3	-	9.3	9.5	9.8	-
		Hi PR	145	156	165	-	162	175	185	-	185	199	210	-	210	226	239	-	237	255	269	-	262	281	297	-
		Lo PR	64	68	75	-	68	72	79	-	71	75	82	-	74	79	86	-	78	83	90	-	80	86	93	-
		MBh	21.1	21.8	23.9	-	20.6	21.3	23.4	-	20.1	20.8	22.8	-	19.6	20.3	22.3	-	18.6	19.3	21.1	-	17.3	17.9	19.6	-
		S/T	0.70	0.58	0.41	-	0.73	0.61	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.67	0.46	-	0.80	0.67	0.47	-
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	20	17	13	-
		kW	1.62	1.65	1.70	-	1.74	1.77	1.83	-	1.84	1.88	1.94	-	1.94	1.98	2.04	-	2.01	2.06	2.12	-	2.08	2.13	2.19	-
		Amps	6.7	6.8	7.0	-	7.1	7.3	7.5	-	7.6	7.8	8.0	-	8.1	8.3	8.5	-	8.6	8.8	9.0	-	9.0	9.2	9.5	-
		Hi PR	140	151	160	-	158	170	179	-	179	193	204	-	204	220	232	-	230	247	261	-	254	273	288	-
Lo PR	62	66	73	-	66	70	77	-	69	73	80	-	72	77	84	-	75	80	88	-	78	83	91	-		
75	850	MBh	23.9	24.6	26.7	28.6	23.4	24.1	26.0	27.9	22.8	23.5	25.4	27.3	22.2	22.9	24.8	26.6	21.1	21.8	23.6	25.3	19.6	20.2	21.8	23.4
		S/T	0.87	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.99	0.88	0.67	0.43	0.99	0.89	0.67	0.43
		ΔT	22	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	19	16	11
		kW	1.68	1.72	1.77	1.82	1.81	1.85	1.90	1.96	1.92	1.96	2.02	2.09	2.02	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.22	2.29	2.36
		Amps	6.9	7.1	7.3	7.5	7.4	7.6	7.8	8.0	8.0	8.1	8.4	8.7	8.5	8.6	8.9	9.2	8.9	9.1	9.4	9.7	9.4	9.6	9.9	10.3
		Hi PR	148	159	168	175	166	178	188	196	189	203	214	223	215	231	244	254	242	260	274	286	267	287	303	316
		Lo PR	66	70	76	81	69	74	81	86	72	77	84	89	76	81	88	94	79	84	92	98	82	87	95	102
		MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.1	22.8	24.7	26.5	21.6	22.2	24.1	25.8	20.5	21.1	22.9	24.5	19.0	19.6	21.2	22.7
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41
		ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	12
75	750	kW	1.67	1.70	1.76	1.81	1.79	1.83	1.89	1.95	1.90	1.94	2.00	2.07	2.00	2.04	2.11	2.18	2.08	2.13	2.19	2.27	2.15	2.20	2.27	2.34
		Amps	6.9	7.0	7.2	7.4	7.3	7.5	7.7	8.0	7.9	8.1	8.3	8.6	8.4	8.6	8.8	9.1	8.9	9.1	9.3	9.7	9.3	9.6	9.8	10.2
		Hi PR	146	157	166	173	164	177	186	195	187	201	212	221	213	229	242	252	239	257	272	283	264	284	300	313
		Lo PR	65	69	76	80	69	73	80	85	71	76	83	88	75	80	87	93	79	84	91	97	81	87	94	101
		MBh	21.4	22.1	23.9	25.6	20.9	21.6	23.3	25.0	20.4	21.0	22.8	24.4	19.9	20.5	22.2	23.8	18.9	19.5	21.1	22.7	17.5	18.1	19.6	21.0
		S/T	0.80	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.39	0.91	0.82	0.62	0.40
		ΔT	24	22	18	13	24	22	18	13	24	23	18	13	25	23	19	13	24	22	18	13	23	21	17	12
		kW	1.63	1.67	1.72	1.77	1.75	1.79	1.84	1.90	1.86	1.90	1.96	2.02	1.95	1.99	2.06	2.12	2.03	2.07	2.14	2.21	2.10	2.14	2.21	2.29
		Amps	6.7	6.8	7.0	7.3	7.2	7.3	7.5	7.8	7.7	7.9	8.1	8.4	8.2	8.4	8.6	8.9	8.6	8.8	9.1	9.4	9.1	9.3	9.6	9.9
		Hi PR	142	153	161	168	159	171	181	189	181	195	206	215	206	222	234	244	232	250	264	275	256	276	291	304
Lo PR	63	67	73	78	67	71	77	82	69	74	80	86	73	77	85	90	76	81	89	94	79	84	92	98		
Shaded area reflects ACCA (TVA) conditions IDB: Entering Indoor Dry Bulb Temperature kW = Total system power Amps = outdoor unit amps (comp. +fan) High and low pressures are measured at the liquid and suction service valves.																										

EXPANDED COOLING DATA — GPG1324***1A (CONT.)

		Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		Entering Indoor Wet Bulb Temperature																									
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	MBh	24.3	24.9	26.6	28.4	23.8	24.3	26.0	27.7	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	21.5	22.0	23.5	25.1	19.9	20.4	21.8	23.3		
	S/T	0.95	0.89	0.72	0.54	1.00	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.62	1.00	1.00	0.83	0.62		
	ΔT	25	24	21	17	26	24	21	17	25	24	21	17	24	25	21	17	23	24	21	17	22	22	20	16		
	kW	1.70	1.73	1.78	1.84	1.82	1.86	1.92	1.98	1.93	1.97	2.04	2.10	2.03	2.07	2.14	2.21	2.11	2.16	2.23	2.30	2.19	2.23	2.31	2.38		
	Amps	7.0	7.1	7.3	7.6	7.5	7.6	7.8	8.1	8.0	8.2	8.5	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.8	9.5	9.7	10.0	10.4		
750	Hi PR	149	161	170	177	167	180	190	198	190	205	216	226	217	233	246	257	244	263	277	289	270	290	306	319		
	Lo PR	66	71	77	82	70	75	81	87	73	78	85	90	77	81	89	95	80	85	93	99	83	88	96	103		
	MBh	23.6	24.1	25.8	27.6	23.1	23.6	25.2	26.9	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.3	22.8	24.4	19.3	19.8	21.1	22.6		
	S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.97	0.79	0.59		
	ΔT	26	25	22	17	27	25	22	18	27	25	22	18	27	26	22	18	26	25	22	18	24	24	21	16		
650	kW	1.68	1.72	1.77	1.82	1.81	1.85	1.90	1.96	1.92	1.96	2.02	2.09	2.02	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.22	2.29	2.36		
	Amps	6.9	7.1	7.3	7.5	7.4	7.6	7.8	8.0	8.0	8.1	8.4	8.7	8.5	8.6	8.9	9.2	8.9	9.1	9.4	9.7	9.4	9.6	9.9	10.3		
	Hi PR	148	159	168	175	166	178	188	196	189	203	214	223	215	231	244	254	242	260	275	286	267	287	303	316		
	Lo PR	66	70	76	81	69	74	81	86	72	77	84	89	76	81	88	94	79	84	92	98	82	87	95	102		
	MBh	21.8	22.3	23.8	25.5	21.3	21.8	23.3	24.9	20.8	21.3	22.7	24.3	20.3	20.7	22.2	23.7	19.3	19.7	21.0	22.5	17.9	18.2	19.5	20.8		
85	S/T	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57		
	ΔT	27	26	22	18	27	26	23	18	27	26	23	18	27	26	23	18	27	26	23	18	25	24	21	17		
	kW	1.64	1.68	1.73	1.78	1.77	1.80	1.86	1.92	1.87	1.91	1.97	2.03	1.97	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.12	2.16	2.23	2.30		
	Amps	6.8	6.9	7.1	7.3	7.2	7.4	7.6	7.8	7.8	7.9	8.2	8.4	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.5	9.2	9.4	9.7	10.0		
	Hi PR	143	154	163	170	161	173	183	191	183	197	208	217	208	224	237	247	234	252	266	278	259	279	294	307		
850	Lo PR	64	68	74	79	67	72	78	83	70	74	81	87	73	78	85	91	77	82	89	95	80	85	93	99		
	MBh	24.8	25.2	26.4	28.2	24.2	24.7	25.8	27.6	23.6	24.1	25.2	26.9	23.0	23.5	24.6	26.2	21.9	22.3	23.4	24.9	20.3	20.7	21.6	23.1		
	S/T	1.00	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.99	0.80	1.00	1.00	0.99	0.81		
	ΔT	27	26	25	21	26	27	25	22	26	26	25	22	25	25	25	22	24	24	25	22	22	22	23	20		
	kW	1.71	1.74	1.80	1.85	1.84	1.87	1.93	1.99	1.95	1.99	2.05	2.12	2.05	2.09	2.16	2.23	2.13	2.18	2.25	2.32	2.20	2.25	2.33	2.40		
750	Amps	7.0	7.2	7.4	7.6	7.5	7.7	7.9	8.2	8.1	8.3	8.5	8.8	8.6	8.8	9.0	9.4	9.1	9.3	9.6	9.9	9.6	9.8	10.1	10.5		
	Hi PR	151	162	171	179	169	182	192	200	192	207	219	228	219	236	249	260	246	265	280	292	272	293	309	323		
	Lo PR	67	71	78	83	71	75	82	88	74	78	85	91	77	82	90	96	81	86	94	100	84	89	97	104		
	MBh	24.0	24.5	25.7	27.4	23.5	23.9	25.1	26.8	22.9	23.4	24.5	26.1	22.4	22.8	23.9	25.5	21.2	21.7	22.7	24.2	19.7	20.1	21.0	22.4		
	S/T	0.95	0.92	0.83	0.67	0.98	0.95	0.86	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77		
650	ΔT	28	28	26	23	28	28	26	23	28	28	26	23	27	28	27	23	26	27	26	23	24	25	24	21		
	kW	1.70	1.73	1.78	1.84	1.82	1.86	1.92	1.98	1.93	1.97	2.04	2.10	2.03	2.07	2.14	2.21	2.11	2.16	2.23	2.30	2.19	2.23	2.31	2.38		
	Amps	7.0	7.1	7.3	7.6	7.5	7.6	7.8	8.1	8.0	8.2	8.5	8.7	8.5	8.7	9.0	9.3	9.0	9.2	9.5	9.8	9.5	9.7	10.0	10.4		
	Hi PR	149	161	170	177	167	180	190	198	190	205	216	226	217	233	246	257	244	263	277	289	270	290	306	319		
	Lo PR	66	71	77	82	70	75	81	87	73	78	85	90	77	81	89	95	80	85	93	99	83	88	96	103		
85	MBh	22.2	22.6	23.7	25.3	21.7	22.1	23.1	24.7	21.2	21.6	22.6	24.1	20.6	21.0	22.0	23.5	19.6	20.0	20.9	22.3	18.2	18.5	19.4	20.7		
	S/T	0.92	0.88	0.80	0.65	0.95	0.92	0.83	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.91	0.74		
	ΔT	29	28	27	23	29	29	27	23	29	29	27	23	29	29	27	24	28	28	27	23	26	26	25	22		
	kW	1.66	1.69	1.74	1.80	1.78	1.82	1.87	1.93	1.89	1.93	1.99	2.05	1.98	2.02	2.09	2.16	2.06	2.11	2.18	2.25	2.13	2.18	2.25	2.32		
	Amps	6.8	6.9	7.1	7.4	7.3	7.4	7.7	7.9	7.8	8.0	8.2	8.5	8.3	8.5	8.7	9.0	8.8	9.0	9.3	9.6	9.3	9.5	9.8	10.1		
850	Hi PR	145	156	164	172	162	175	185	192	185	199	210	219	210	226	239	249	237	255	269	280	261	281	297	310		
	Lo PR	64	68	75	80	68	72	79	84	71	75	82	87	74	79	86	92	78	83	90	96	80	86	93	100		
	kW = Total system power																										
	IDB: Entering Indoor Dry Bulb Temperature																										
	kW = outdoor unit amps (comp.+fan)																										
Shaded area reflects ARI conditions																											
High and low pressures are measured at the liquid and suction service valves.																											

EXPANDED COOLING DATA — GPG1330***1A

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
		IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70		MBh	28.0	29.0	31.8	-	27.4	28.4	31.1	-	26.7	27.7	30.3	-	26.0	27.0	29.6	-	24.7	25.7	28.1	-	22.9	23.8	26.0	-											
		S/T	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.83	0.69	0.48	-	0.86	0.71	0.50	-	0.89	0.74	0.51	-	0.90	0.75	0.52	-											
		ΔT	18	16	12	-	18	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-											
	1100	kW	2.04	2.08	2.14	-	2.18	2.23	2.29	-	2.31	2.35	2.42	-	2.42	2.47	2.54	-	2.51	2.56	2.64	-	2.59	2.64	2.73	-											
		Amps	9.1	9.2	9.5	-	9.6	9.8	10.0	-	10.2	10.4	10.7	-	10.8	11.0	11.3	-	11.3	11.6	11.9	-	11.9	12.1	12.4	-											
		Hi PR	143	154	163	-	161	173	183	-	183	197	208	-	208	224	237	-	234	252	266	-	259	279	294	-											
		Lo PR	67	71	78	-	71	75	82	-	74	78	85	-	77	82	90	-	81	86	94	-	84	89	97	-											
		MBh	27.6	28.6	31.3	-	26.9	27.9	30.6	-	26.3	27.3	29.9	-	25.7	26.6	29.1	-	24.4	25.3	27.7	-	22.6	23.4	25.6	-											
		S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-											
		ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-											
1000		kW	2.03	2.07	2.13	-	2.17	2.21	2.28	-	2.30	2.34	2.41	-	2.40	2.45	2.53	-	2.50	2.55	2.63	-	2.58	2.63	2.71	-											
		Amps	9.0	9.2	9.4	-	9.6	9.7	10.0	-	10.2	10.4	10.7	-	10.7	10.9	11.2	-	11.3	11.5	11.8	-	11.8	12.0	12.4	-											
		Hi PR	142	153	162	-	160	172	182	-	182	196	207	-	207	223	235	-	233	251	265	-	257	277	292	-											
		Lo PR	67	71	77	-	70	75	82	-	73	78	85	-	77	82	89	-	80	86	93	-	83	89	97	-											
		MBh	27.2	28.2	30.9	-	26.5	27.5	30.1	-	25.9	26.9	29.4	-	25.3	26.2	28.7	-	24.0	24.9	27.3	-	22.2	23.1	25.3	-											
		S/T	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.69	0.47	-	0.83	0.69	0.48	-											
		ΔT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-											
	900		kW	2.01	2.05	2.10	-	2.15	2.19	2.25	-	2.27	2.31	2.38	-	2.37	2.42	2.49	-	2.46	2.51	2.59	-	2.54	2.60	2.67	-										
			Amps	8.9	9.1	9.3	-	9.5	9.6	9.9	-	10.1	10.3	10.5	-	10.6	10.8	11.1	-	11.1	11.4	11.7	-	11.7	11.9	12.2	-										
			Hi PR	140	151	159	-	157	169	178	-	179	192	203	-	203	219	231	-	229	246	260	-	253	272	287	-										
		Lo PR	65	70	76	-	69	74	80	-	72	76	83	-	75	80	88	-	79	84	92	-	82	87	95	-											

75	1100	MBh	28.5	29.3	31.7	34.1	27.8	28.6	31.0	33.3	27.2	28.0	30.3	32.5	26.5	27.3	29.5	31.7	25.2	25.9	28.0	30.1	23.3	24.0	26.0	27.9
		S/T	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.97	0.87	0.66	0.42	1.00	0.90	0.68	0.44	1.00	0.91	0.69	0.44
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	19	18	15	10
		kW	2.06	2.10	2.16	2.22	2.20	2.24	2.31	2.38	2.32	2.37	2.44	2.52	2.44	2.49	2.56	2.64	2.53	2.58	2.66	2.74	2.61	2.67	2.75	2.83
		Amps	9.1	9.3	9.5	9.8	9.7	9.9	10.1	10.4	10.3	10.5	10.8	11.1	10.9	11.1	11.4	11.7	11.4	11.6	12.0	12.3	12.0	12.2	12.5	12.9
		Hi PR	145	156	165	172	163	175	185	193	185	199	210	219	211	227	239	250	237	255	269	281	262	282	297	310
		Lo PR	68	72	79	84	72	76	83	89	74	79	86	92	78	83	91	97	82	87	95	101	85	90	98	105
		MBh	28.1	28.9	31.3	33.6	27.4	28.2	30.5	32.8	26.8	27.5	29.8	32.0	26.1	26.9	29.1	31.2	24.8	25.5	27.6	29.7	23.0	23.6	25.6	27.5
		S/T	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.86	0.65	0.42	0.98	0.87	0.66	0.42
		ΔT	22	20	17	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	16	11
1000		kW	2.05	2.09	2.14	2.21	2.19	2.23	2.30	2.36	2.31	2.36	2.43	2.50	2.42	2.47	2.55	2.62	2.52	2.57	2.65	2.73	2.60	2.65	2.73	2.82
		Amps	9.1	9.3	9.5	9.7	9.6	9.8	10.1	10.3	10.3	10.5	10.7	11.1	10.8	11.0	11.3	11.7	11.4	11.6	11.9	12.3	11.9	12.1	12.5	12.9
		Hi PR	144	155	163	170	161	174	183	191	184	198	209	218	209	225	238	248	235	253	267	279	260	280	295	308
		Lo PR	67	72	78	83	71	76	83	88	74	79	86	91	78	83	90	96	81	86	94	101	84	89	98	104
		MBh	27.6	28.5	30.8	33.1	27.0	27.8	30.1	32.3	26.4	27.1	29.4	31.5	25.7	26.5	28.7	30.7	24.4	25.1	27.2	29.2	22.6	23.3	25.2	27.1
		S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.41	0.94	0.84	0.64	0.41
		ΔT	23	21	17	12	23	22	18	12	23	22	18	12	24	22	18	12	23	21	18	12	22	20	16	11
		kW	2.02	2.06	2.12	2.18	2.16	2.20	2.27	2.33	2.28	2.33	2.40	2.47	2.39	2.44	2.51	2.59	2.48	2.53	2.61	2.69	2.56	2.62	2.70	2.78
		Amps	9.0	9.1	9.4	9.6	9.5	9.7	9.9	10.2	10.1	10.3	10.6	10.9	10.7	10.9	11.2	11.5	11.2	11.4	11.7	12.1	11.8	12.0	12.3	12.7
		Hi PR	141	152	161	168	159	171	180	188	180	194	205	214	206	221	234	244	231	249	263	274	255	275	290	303
Lo PR	66	70	77	82	70	74	81	86	73	77	84	90	76	81	89	94	80	85	93	99	83	88	96	102		

EXPANDED COOLING DATA — GPG1330***1A (CONT.)

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
80	1100	MBh	29.0	29.6	31.6	33.8	28.3	28.9	30.9	33.0	27.6	28.2	30.2	32.3	27.0	27.6	29.4	31.5	25.6	26.2	28.0	29.9	23.7	24.2	25.9	27.7	23.7	24.2	25.9	27.7																			
		S/T	0.97	0.91	0.74	0.56	1.00	0.95	0.77	0.58	1.00	0.97	0.79	0.59	1.00	1.00	0.81	0.61	1.00	1.00	0.85	0.63	1.00	1.00	0.85	0.64	1.00	1.00	0.85	0.64																			
		ΔT	24	23	20	16	24	23	20	16	23	23	20	16	23	23	20	16	21	22	20	16	20	20	18	15	20	20	18	15																			
		kW	2.07	2.11	2.17	2.24	2.22	2.26	2.33	2.39	2.34	2.39	2.46	2.54	2.45	2.50	2.58	2.66	2.55	2.60	2.68	2.77	2.63	2.69	2.77	2.86	2.63	2.69	2.77	2.86																			
		Amps	9.2	9.4	9.6	9.9	9.8	9.9	10.2	10.5	10.4	10.6	10.9	11.2	11.0	11.2	11.5	11.8	11.5	11.7	12.1	12.4	12.1	12.3	12.6	13.0	12.1	12.3	12.6	13.0																			
	Hi PR	146	157	166	173	164	177	187	195	187	201	212	221	213	229	242	252	239	257	272	284	264	284	300	313	264	284	300	313																				
	Lo PR	68	73	79	85	72	77	84	89	75	80	87	93	79	84	92	98	83	88	96	102	86	91	99	106	86	91	99	106																				
	MBh	28.6	29.2	31.2	33.3	27.9	28.5	30.5	32.6	27.2	27.8	29.7	31.8	26.6	27.1	29.0	31.0	25.2	25.8	27.6	29.5	23.4	23.9	25.5	27.3	23.4	23.9	25.5	27.3																				
	S/T	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.55	0.99	0.93	0.76	0.56	1.00	0.96	0.78	0.58	1.00	0.99	0.81	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61																				
	ΔT	24	23	20	16	25	24	21	16	25	24	21	16	24	24	21	17	23	24	21	16	21	22	19	15	21	22	19	15																				
	kW	2.06	2.10	2.16	2.22	2.20	2.25	2.31	2.38	2.33	2.38	2.45	2.52	2.44	2.49	2.57	2.65	2.54	2.59	2.67	2.75	2.62	2.67	2.75	2.84	2.62	2.67	2.75	2.84																				
Amps	9.2	9.3	9.5	9.8	9.7	9.9	10.1	10.4	10.3	10.5	10.8	11.1	10.9	11.1	11.4	11.7	11.4	11.7	12.0	12.4	12.0	12.2	12.6	13.0	12.0	12.2	12.6	13.0																					
Hi PR	145	156	165	172	163	175	185	193	185	200	211	220	211	227	240	250	238	256	270	282	263	283	298	311	263	283	298	311																					
Lo PR	68	72	79	84	72	76	83	89	75	79	87	92	78	83	91	97	82	87	95	102	85	90	99	105	85	90	99	105																					
900	MBh	28.1	28.7	30.7	32.8	27.5	28.1	30.0	32.1	26.8	27.4	29.3	31.3	26.2	26.7	28.6	30.5	24.9	25.4	27.1	29.0	23.0	23.5	25.1	26.9	23.0	23.5	25.1	26.9																				
	S/T	0.90	0.84	0.69	0.51	0.93	0.87	0.71	0.53	0.95	0.90	0.73	0.54	0.99	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.97	0.79	0.59	1.00	0.97	0.79	0.59																				
	ΔT	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	18	25	25	22	17	24	23	20	16	24	23	20	16																				
	kW	2.04	2.08	2.13	2.20	2.18	2.22	2.28	2.35	2.30	2.35	2.42	2.49	2.41	2.46	2.53	2.61	2.50	2.55	2.63	2.71	2.58	2.64	2.72	2.80	2.58	2.64	2.72	2.80																				
	Amps	9.0	9.2	9.4	9.7	9.6	9.8	10.0	10.3	10.2	10.4	10.7	11.0	10.8	11.0	11.3	11.6	11.3	11.5	11.8	12.2	11.8	12.1	12.4	12.8	11.8	12.1	12.4	12.8																				
	Hi PR	143	154	162	169	160	172	182	190	182	196	207	216	208	223	236	246	234	251	265	277	258	278	293	306	258	278	293	306																				
	Lo PR	67	71	78	83	71	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103	83	89	97	103																				

85	1100	MBh	29.5	30.1	31.5	33.6	28.8	29.4	30.8	32.8	28.1	28.7	30.0	32.0	27.4	28.0	29.3	31.2	26.1	26.6	27.8	29.7	24.1	24.6	25.8	27.5
		S/T	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.94	0.77	1.00	1.00	0.97	0.79	1.00	1.00	1.00	0.82	1.00	1.00	1.00	0.83
		ΔT	25	25	23	20	24	25	24	20	24	24	24	20	23	23	24	21	22	22	23	20	20	21	22	19
		kW	2.09	2.13	2.19	2.25	2.23	2.28	2.34	2.41	2.36	2.41	2.48	2.55	2.47	2.52	2.60	2.68	2.57	2.62	2.70	2.79	2.65	2.71	2.79	2.88
		Amps	9.3	9.4	9.7	9.9	9.8	10.0	10.3	10.6	10.5	10.7	10.9	11.3	11.0	11.2	11.5	11.9	11.6	11.8	12.1	12.5	12.1	12.4	12.7	13.1
	Hi PR	148	159	168	175	166	178	188	197	189	203	214	224	215	231	244	255	242	260	275	286	267	287	303	316	
	Lo PR	69	74	80	85	73	78	85	90	76	81	88	94	80	85	93	99	84	89	97	103	86	92	100	107	
	1000	MBh	29.1	29.6	31.0	33.1	28.4	28.9	30.3	32.3	27.7	28.2	29.6	31.6	27.0	27.6	28.9	30.8	25.7	26.2	27.4	29.2	23.8	24.2	25.4	27.1
		S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79
		ΔT	26	26	24	21	26	26	25	21	25	26	25	21	25	25	25	21	24	24	24	21	22	22	23	20
kW		2.08	2.12	2.18	2.24	2.22	2.26	2.33	2.40	2.35	2.39	2.47	2.54	2.46	2.51	2.59	2.67	2.56	2.61	2.69	2.77	2.64	2.69	2.78	2.86	
Amps		9.2	9.4	9.6	9.9	9.8	10.0	10.2	10.5	10.4	10.6	10.9	11.2	11.0	11.2	11.5	11.8	11.5	11.8	12.1	12.5	12.1	12.3	12.7	13.1	
900	Hi PR	147	158	167	174	165	177	187	195	187	202	213	222	213	230	242	253	240	258	273	284	265	285	301	314	
	Lo PR	69	73	80	85	72	77	84	90	75	80	87	93	79	84	92	98	83	88	96	103	86	91	100	106	
	MBh	28.6	29.2	30.6	32.6	28.0	28.5	29.8	31.8	27.3	27.8	29.1	31.1	26.6	27.1	28.4	30.3	25.3	25.8	27.0	28.8	23.4	23.9	25.0	26.7	
	S/T	0.94	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76	
	ΔT	28	27	26	22	28	27	26	22	28	27	26	22	27	28	26	23	26	26	26	22	24	24	24	21	

EXPANDED COOLING DATA — GPG1336***1A

		Outdoor Ambient Temperature																Entering Indoor Wet Bulb Temperature							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	34.0	35.3	38.6	-	33.2	34.4	37.7	-	32.4	33.6	36.8	-	31.6	32.8	35.9	-	30.1	31.2	34.1	-	27.8	28.9	31.6	-
	S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	2.50	2.55	2.62	-	2.67	2.72	2.80	-	2.82	2.87	2.95	-	2.95	3.00	3.09	-	3.06	3.12	3.21	-	3.15	3.22	3.31	-
	Amps	10.2	10.4	10.7	-	10.8	11.1	11.3	-	11.6	11.8	12.1	-	12.2	12.5	12.8	-	12.9	13.1	13.5	-	13.5	13.8	14.2	-
	Hi PR	142	152	161	-	159	171	181	-	181	195	205	-	206	222	234	-	232	249	263	-	256	275	291	-
	Lo PR	65	69	75	-	68	73	79	-	71	75	82	-	74	79	86	-	78	83	91	-	81	86	94	-
	MBh	33.7	34.9	38.2	-	32.9	34.1	37.4	-	32.1	33.3	36.5	-	31.3	32.5	35.6	-	29.8	30.8	33.8	-	27.6	28.6	31.3	-
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-
1100	kW	2.50	2.54	2.61	-	2.66	2.71	2.79	-	2.81	2.86	2.95	-	2.94	3.00	3.09	-	3.05	3.11	3.20	-	3.15	3.21	3.31	-
	Amps	10.2	10.4	10.6	-	10.8	11.0	11.3	-	11.6	11.8	12.1	-	12.2	12.5	12.8	-	12.9	13.1	13.5	-	13.5	13.8	14.2	-
	Hi PR	141	152	160	-	158	171	180	-	180	194	205	-	205	221	233	-	231	248	262	-	255	275	290	-
	Lo PR	64	68	75	-	68	72	79	-	71	75	82	-	74	79	86	-	78	83	90	-	80	86	93	-
	MBh	33.2	34.4	37.7	-	32.4	33.6	36.8	-	31.6	32.8	35.9	-	30.9	32.0	35.0	-	29.3	30.4	33.3	-	27.2	28.1	30.8	-
	S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-
1100	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
	kW	2.47	2.51	2.58	-	2.63	2.68	2.76	-	2.78	2.83	2.91	-	2.90	2.96	3.05	-	3.01	3.07	3.16	-	3.11	3.17	3.26	-
	Amps	10.1	10.2	10.5	-	10.7	10.9	11.2	-	11.4	11.6	12.0	-	12.1	12.3	12.6	-	12.7	12.9	13.3	-	13.3	13.6	14.0	-
	Hi PR	139	149	158	-	156	168	177	-	177	191	201	-	202	217	229	-	227	244	258	-	251	270	285	-
	Lo PR	63	67	73	-	67	71	78	-	69	74	81	-	73	78	85	-	76	81	89	-	79	84	92	-
75	MBh	34.6	35.6	38.6	41.4	33.8	34.8	37.7	40.4	33.0	34.0	36.8	39.5	32.2	33.1	35.9	38.5	30.6	31.5	34.1	36.6	28.3	29.2	31.6	33.9
	S/T	0.86	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43
	ΔT	21	19	16	11	21	19	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
	kW	2.52	2.56	2.64	2.71	2.69	2.74	2.82	2.90	2.84	2.89	2.98	3.06	2.97	3.03	3.12	3.21	3.08	3.14	3.24	3.33	3.18	3.24	3.34	3.44
	Amps	10.3	10.5	10.7	11.1	10.9	11.1	11.4	11.8	11.7	11.9	12.2	12.6	12.3	12.6	12.9	13.3	13.0	13.3	13.6	14.1	13.6	13.9	14.3	14.8
	Hi PR	143	154	163	170	161	173	182	190	183	196	207	216	208	224	236	246	234	252	266	277	259	278	294	306
	Lo PR	65	69	76	81	69	73	80	85	72	76	83	89	75	80	87	93	79	84	92	98	82	87	95	101
	MBh	34.2	35.3	38.2	41.0	33.5	34.4	37.3	40.0	32.7	33.6	36.4	39.1	31.9	32.8	35.5	38.1	30.3	31.2	33.7	36.2	28.0	28.9	31.2	33.5
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42
	ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11
1200	kW	2.51	2.56	2.63	2.70	2.68	2.73	2.81	2.89	2.83	2.89	2.97	3.06	2.96	3.02	3.11	3.20	3.07	3.14	3.23	3.33	3.17	3.23	3.33	3.43
	Amps	10.2	10.4	10.7	11.0	10.9	11.1	11.4	11.7	11.7	11.9	12.2	12.6	12.3	12.6	12.9	13.3	13.0	13.2	13.6	14.0	13.6	13.9	14.3	14.7
	Hi PR	143	154	162	169	160	172	182	190	182	196	207	216	207	223	236	246	233	251	265	276	258	277	293	305
	Lo PR	65	69	76	80	69	73	80	85	71	76	83	88	75	80	87	93	79	84	91	97	81	87	94	101
	MBh	33.7	34.7	37.6	40.4	33.0	33.9	36.7	39.4	32.2	33.1	35.8	38.5	31.4	32.3	35.0	37.5	29.8	30.7	33.2	35.7	27.6	28.4	30.8	33.0
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
1100	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11
	kW	2.48	2.53	2.60	2.67	2.65	2.70	2.78	2.86	2.80	2.85	2.93	3.02	2.92	2.98	3.07	3.16	3.03	3.10	3.19	3.28	3.13	3.19	3.29	3.39
	Amps	10.1	10.3	10.6	10.9	10.8	11.0	11.3	11.6	11.5	11.7	12.1	12.4	12.1	12.4	12.7	13.1	12.8	13.0	13.4	13.8	13.4	13.7	14.1	14.5
	Hi PR	140	151	159	166	157	169	179	186	179	193	203	212	204	219	232	242	229	247	261	272	253	273	288	300
	Lo PR	64	68	74	79	68	72	78	84	70	75	82	87	74	78	86	91	77	82	90	96	80	85	93	99
	MBh	34.6	35.6	38.6	41.4	33.8	34.8	37.7	40.4	33.0	34.0	36.8	39.5	32.2	33.1	35.9	38.5	30.6	31.5	34.1	36.6	28.3	29.2	31.6	33.9

Shaded area reflects ACCA (TVA) conditions IDB: Entering Indoor Dry Bulb Temperature kW = Total system power Amps = outdoor unit amps (comp. +fan)
 High and low pressures are measured at the liquid and suction service valves.

EXPANDED COOLING DATA — GPG1336***1A (CONT.)

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
80	1300	MBh	35.2	36.0	38.4	41.1	34.4	35.1	37.5	40.1	33.6	34.3	36.6	39.2	32.8	33.5	35.8	38.2	31.1	31.8	34.0	36.3	28.8	29.4	31.5	33.6	28.8	29.4	31.5	33.6																			
		S/T	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61																			
		ΔT	23	22	19	16	24	23	20	16	24	23	20	16	23	23	20	16	22	22	20	16	20	20	18	15	20	20	18	15																			
		kW	2.54	2.58	2.65	2.73	2.71	2.76	2.84	2.92	2.86	2.91	3.00	3.09	2.99	3.05	3.14	3.23	3.10	3.17	3.26	3.36	3.20	3.27	3.37	3.47	3.20	3.27	3.37	3.47																			
		Amps	10.3	10.5	10.8	11.1	11.0	11.2	11.5	11.9	11.8	12.0	12.3	12.7	12.4	12.7	13.0	13.4	13.1	13.4	13.7	14.2	13.7	14.0	14.4	14.9	13.7	14.0	14.4	14.9																			
	1200	Hi PR	145	156	164	171	162	175	184	192	184	198	210	219	210	226	239	249	236	254	269	280	261	281	297	309	261	281	297	309																			
		Lo PR	66	70	77	81	70	74	81	86	72	77	84	89	76	81	88	94	80	85	93	99	82	88	96	102	82	88	96	102																			
		MBh	34.9	35.6	38.1	40.7	34.0	34.8	37.2	39.7	33.2	34.0	36.3	38.8	32.4	33.1	35.4	37.8	30.8	31.5	33.6	36.0	28.5	29.2	31.2	33.3	28.5	29.2	31.2	33.3																			
		S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60	1.00	0.99	0.81	0.60																			
		ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	24	24	21	16	22	22	19	15	22	22	19	15																			
	1100	kW	2.53	2.58	2.65	2.72	2.70	2.75	2.83	2.91	2.85	2.91	2.99	3.08	2.98	3.04	3.13	3.23	3.10	3.16	3.25	3.35	3.19	3.26	3.36	3.46	3.19	3.26	3.36	3.46																			
Amps		10.3	10.5	10.8	11.1	11.0	11.2	11.5	11.8	11.7	12.0	12.3	12.7	12.4	12.7	13.0	13.4	13.1	13.3	13.7	14.1	13.7	14.0	14.4	14.9	13.7	14.0	14.4	14.9																				
Hi PR		144	155	164	171	162	174	184	192	184	198	209	218	209	225	238	248	236	254	268	279	260	280	296	309	260	280	296	309																				
Lo PR		66	70	76	81	69	74	81	86	72	77	84	89	76	81	88	94	79	84	92	98	82	87	95	102	82	87	95	102																				
MBh		34.3	35.1	37.5	40.1	33.5	34.3	36.6	39.1	32.7	33.5	35.7	38.2	31.9	32.6	34.9	37.3	30.3	31.0	33.1	35.4	28.1	28.7	30.7	32.8	28.1	28.7	30.7	32.8																				
	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	1.01	0.95	0.77	0.58	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58																				
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	26	25	21	17	23	23	20	16	23	23	20	16																				
	kW	2.50	2.55	2.62	2.69	2.67	2.72	2.80	2.88	2.82	2.87	2.95	3.04	2.95	3.00	3.09	3.19	3.06	3.12	3.21	3.31	3.15	3.22	3.31	3.41	3.15	3.22	3.31	3.41																				
	Amps	10.2	10.4	10.7	11.0	10.8	11.1	11.3	11.7	11.6	11.8	12.1	12.5	12.2	12.5	12.8	13.2	12.9	13.1	13.5	13.9	13.5	13.8	14.2	14.7	13.5	13.8	14.2	14.7																				
	Hi PR	142	152	161	168	159	171	181	188	181	195	205	214	206	222	234	244	232	249	263	275	256	275	291	303	256	275	291	303																				
Lo PR	65	69	75	80	68	73	79	84	71	75	82	88	74	79	87	92	78	83	91	97	81	86	94	100	81	86	94	100																					

1300	MBh	35.8	36.5	38.2	40.8	35.0	35.7	37.4	39.9	34.2	34.8	36.5	38.9	33.3	34.0	35.6	38.0	31.7	32.3	33.8	36.1	29.3	29.9	31.3	33.4
	S/T	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	25	24	23	20	25	25	23	20	24	25	23	20	24	24	24	20	22	23	23	20	21	21	22	19
	kW	2.55	2.60	2.67	2.75	2.73	2.78	2.86	2.94	2.88	2.93	3.02	3.11	3.01	3.07	3.16	3.26	3.13	3.19	3.29	3.39	3.23	3.29	3.39	3.50
	Amps	10.4	10.6	10.9	11.2	11.1	11.3	11.6	12.0	11.9	12.1	12.4	12.8	12.5	12.8	13.1	13.5	13.2	13.5	13.8	14.3	13.8	14.1	14.5	15.0
	Hi PR	146	157	166	173	164	176	186	194	186	200	212	221	212	228	241	251	239	257	271	283	264	284	300	313
	Lo PR	67	71	77	82	70	75	82	87	73	78	85	90	77	82	89	95	80	86	93	99	83	89	97	103
	MBh	35.5	36.2	37.9	40.4	34.6	35.3	37.0	39.5	33.8	34.5	36.1	38.5	33.0	33.6	35.2	37.6	31.3	31.9	33.5	35.7	29.0	29.6	31.0	33.1
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78
	ΔT	26	26	24	21	27	26	25	21	26	26	25	21	25	26	25	22	24	24	25	21	22	23	23	20
1200	kW	2.55	2.60	2.67	2.74	2.72	2.77	2.85	2.93	2.87	2.93	3.01	3.10	3.01	3.07	3.16	3.25	3.12	3.18	3.28	3.38	3.22	3.28	3.38	3.49
	Amps	10.4	10.6	10.9	11.2	11.1	11.3	11.6	11.9	11.8	12.1	12.4	12.8	12.5	12.7	13.1	13.5	13.2	13.4	13.8	14.3	13.8	14.1	14.5	15.0
	Hi PR	146	157	165	172	163	176	186	194	186	200	211	220	212	228	240	251	238	256	270	282	263	283	299	312
	Lo PR	66	71	77	82	70	75	81	87	73	78	85	90	77	81	89	95	80	85	93	99	83	88	96	103
	MBh	34.9	35.6	37.3	39.8	34.1	34.8	36.4	38.9	33.3	34.0	35.6	37.9	32.5	33.1	34.7	37.0	30.9	31.5	33.0	35.2	28.6	29.2	30.5	32.6
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	27	27	25	22	27	27	26	22	28	27	26	22	27	27	26	22	26	26	25	22	24	24	24	21
	kW	2.52	2.56	2.64	2.71	2.69	2.74	2.82	2.90	2.84	2.89	2.98	3.06	2.97	3.03	3.12	3.21	3.08	3.14	3.24	3.33	3.18	3.24	3.34	3.44
	Amps	10.3	10.5	10.7	11.1	10.9	11.1	11.4	11.8	11.7	11.9	12.2	12.6	12.3	12.6	12.9	13.3	13.0	13.3	13.6	14.1	13.6	13.9	14.3	14.8
	Hi PR	143	154	163	170	161	173	182	190	183	196	207	216	208	224	236	246	234	252	266	277	258	278	294	306
Lo PR	65	69	76	81	69	73	80	85	72	76	83	89	75	80	87	93	79	84	92	98	82	87	95	101	

EXPANDED COOLING DATA — GPG1342***1A

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70		MBh	40.0	41.4	45.4	-	39.0	40.5	44.3	-	38.1	39.5	43.3	-	37.2	38.5	42.2	-	35.3	36.6	40.1	-	32.7	33.9	37.2	-	32.7	33.9	37.2	-							
		S/T	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-							
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-							
	1450	kW	2.85	2.91	3.00	-	3.07	3.14	3.24	-	3.26	3.34	3.44	-	3.44	3.51	3.63	-	3.58	3.66	3.78	-	3.71	3.79	3.92	-	3.71	3.79	3.92	-							
		Amps	12.8	13.1	13.5	-	13.7	14.0	14.4	-	14.7	15.0	15.4	-	15.6	15.9	16.4	-	16.4	16.8	17.3	-	17.3	17.7	18.2	-	17.3	17.7	18.2	-							
		Hi PR	157	169	179	-	176	190	200	-	200	216	228	-	228	246	259	-	257	276	292	-	284	305	323	-	284	305	323	-							
		Lo PR	67	71	78	-	71	75	82	-	73	78	85	-	77	82	89	-	81	86	94	-	83	89	97	-	83	89	97	-							
		MBh	39.6	41.0	44.9	-	38.7	40.1	43.9	-	37.7	39.1	42.9	-	36.8	38.2	41.8	-	35.0	36.3	39.7	-	32.4	33.6	36.8	-	32.4	33.6	36.8	-							
		S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-							
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-							
	1350	kW	2.84	2.90	3.00	-	3.06	3.13	3.23	-	3.26	3.33	3.44	-	3.43	3.50	3.62	-	3.57	3.65	3.77	-	3.70	3.78	3.91	-	3.70	3.78	3.91	-							
	Amps	12.8	13.1	13.4	-	13.7	14.0	14.3	-	14.7	15.0	15.4	-	15.5	15.9	16.3	-	16.4	16.8	17.3	-	17.3	17.6	18.2	-	17.3	17.6	18.2	-								
	Hi PR	157	169	178	-	176	189	200	-	200	215	227	-	228	245	259	-	256	276	291	-	283	305	322	-	283	305	322	-								
	Lo PR	67	71	77	-	70	75	82	-	73	78	85	-	77	82	89	-	80	86	93	-	83	89	97	-	83	89	97	-								
1250		MBh	39.0	40.4	44.3	-	38.1	39.5	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	34.5	35.7	39.1	-	31.9	33.1	36.2	-	31.9	33.1	36.2	-							
		S/T	0.71	0.59	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-							
		ΔT	20	18	13	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	13	-	19	17	13	-	19	17	13	-							
		kW	2.80	2.86	2.95	-	3.02	3.09	3.18	-	3.21	3.28	3.39	-	3.38	3.45	3.57	-	3.52	3.60	3.72	-	3.64	3.73	3.85	-	3.64	3.73	3.85	-							
		Amps	12.7	12.9	13.3	-	13.5	13.8	14.2	-	14.5	14.8	15.2	-	15.3	15.7	16.1	-	16.2	16.5	17.0	-	17.0	17.4	17.9	-	17.0	17.4	17.9	-							
		Hi PR	154	166	175	-	173	186	196	-	196	211	223	-	224	241	254	-	252	271	286	-	278	299	316	-	278	299	316	-							
		Lo PR	65	70	76	-	69	74	80	-	72	76	83	-	75	80	88	-	79	84	92	-	82	87	95	-	82	87	95	-							
	75		MBh	40.7	41.9	45.3	48.6	39.7	40.9	44.2	47.5	38.8	39.9	43.2	46.4	37.8	38.9	42.1	45.2	35.9	37.0	40.0	43.0	33.3	34.3	37.1	39.8	33.3	34.3	37.1	39.8						
			S/T	0.86	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.62	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43	0.98	0.88	0.66	0.43						
			ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11	21	19	16	11						
			kW	2.87	2.93	3.02	3.12	3.09	3.15	3.26	3.36	3.28	3.36	3.47	3.58	3.46	3.53	3.65	3.77	3.60	3.68	3.81	3.94	3.73	3.81	3.94	4.08	3.73	3.81	3.94	4.08						
		Amps	12.9	13.2	13.5	14.0	13.8	14.1	14.5	14.9	14.8	15.1	15.5	16.0	15.7	16.0	16.5	17.0	16.5	16.9	17.4	18.0	17.4	17.8	18.3	18.9	17.4	17.8	18.3	18.9							

EXPANDED COOLING DATA — GPG1342***1A (CONT.)

		Outdoor Ambient Temperature																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
1450	MBh	41.4	42.3	45.2	48.3	40.4	41.3	44.1	47.2	39.4	40.3	43.1	46.0	38.5	39.3	42.0	44.9	36.6	37.4	39.9	42.7	33.9	34.6	37.0	39.5
	S/T	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.57	1.00	0.96	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61
	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	24	24	21	17	23	24	21	16	21	22	19	15
	kW	2.90	2.96	3.05	3.15	3.12	3.19	3.29	3.40	3.32	3.39	3.50	3.62	3.49	3.57	3.69	3.81	3.64	3.72	3.85	3.98	3.77	3.86	3.99	4.12
	Amps	13.0	13.3	13.7	14.1	13.9	14.2	14.6	15.1	14.9	15.3	15.7	16.2	15.8	16.2	16.6	17.2	16.7	17.1	17.6	18.2	17.6	18.0	18.5	19.1
1350	Hi PR	160	173	182	190	180	194	204	213	205	220	232	242	233	251	265	276	262	282	298	311	290	312	329	343
	Lo PR	68	72	79	84	72	77	84	89	75	80	87	93	79	84	91	97	82	88	96	102	85	91	99	105
	MBh	41.0	41.9	44.7	47.8	40.0	40.9	43.7	46.7	39.1	39.9	42.6	45.6	38.1	38.9	41.6	44.5	36.2	37.0	39.5	42.2	33.5	34.3	36.6	39.1
	S/T	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	0.99	0.81	0.60
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	25	25	22	17	23	23	20	16
1250	kW	2.89	2.95	3.04	3.14	3.11	3.18	3.28	3.39	3.31	3.38	3.49	3.61	3.49	3.56	3.68	3.81	3.63	3.72	3.84	3.97	3.76	3.85	3.98	4.11
	Amps	13.0	13.3	13.6	14.1	13.9	14.2	14.6	15.0	14.9	15.2	15.7	16.2	15.8	16.1	16.6	17.1	16.7	17.0	17.5	18.1	17.5	17.9	18.5	19.1
	Hi PR	160	172	182	189	179	193	204	213	204	220	232	242	232	250	264	275	261	281	297	310	289	311	328	342
	Lo PR	68	72	79	84	72	76	83	89	75	79	87	92	78	83	91	97	82	87	95	102	85	90	99	105
	MBh	40.3	41.2	44.0	47.1	39.4	40.3	43.0	46.0	38.5	39.3	42.0	44.9	37.5	38.4	41.0	43.8	35.7	36.4	38.9	41.6	33.0	33.8	36.1	38.5
1250	S/T	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.56	1.01	0.95	0.77	0.58	1.00	0.95	0.78	0.58
	ΔT	26	25	22	18	27	26	22	18	27	26	22	18	27	26	22	18	26	25	22	18	24	24	21	16
	kW	2.85	2.91	3.00	3.10	3.07	3.14	3.24	3.34	3.26	3.34	3.45	3.56	3.44	3.51	3.63	3.75	3.58	3.66	3.78	3.91	3.71	3.79	3.92	4.05
	Amps	12.8	13.1	13.5	13.9	13.7	14.0	14.4	14.8	14.7	15.0	15.5	16.0	15.6	15.9	16.4	16.9	16.4	16.8	17.3	17.9	17.3	17.7	18.2	18.8
	Hi PR	157	169	179	186	176	190	200	209	201	216	228	238	228	246	260	271	257	276	292	305	284	305	323	336
	Lo PR	67	71	78	83	71	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103

1450	MBh	42.1	42.9	44.9	47.9	41.1	41.9	43.9	46.8	40.1	40.9	42.9	45.7	39.2	39.9	41.8	44.6	37.2	37.9	39.7	42.4	34.5	35.1	36.8	39.2
	S/T	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	26	26	24	21	26	26	25	21	25	26	25	21	25	25	25	22	24	24	25	21	22	22	23	20
	kW	2.92	2.98	3.08	3.18	3.15	3.21	3.32	3.43	3.35	3.42	3.53	3.65	3.52	3.60	3.72	3.85	3.67	3.76	3.88	4.01	3.80	3.89	4.02	4.16
	Amps	13.1	13.4	13.8	14.2	14.0	14.3	14.7	15.2	15.1	15.4	15.8	16.3	16.0	16.3	16.8	17.3	16.9	17.2	17.7	18.3	17.7	18.1	18.7	19.3
1350	Hi PR	162	174	184	192	182	196	206	215	207	222	235	245	235	253	267	279	265	285	301	314	293	315	332	347
	Lo PR	69	73	80	85	73	77	84	90	76	80	88	93	79	84	92	98	83	88	97	103	86	92	100	106
	MBh	41.7	42.5	44.5	47.5	40.7	41.5	43.5	46.4	39.7	40.5	42.4	45.3	38.8	39.5	41.4	44.2	36.8	37.5	39.3	42.0	34.1	34.8	36.4	38.9
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.96	0.78
	ΔT	27	27	25	22	28	27	26	22	27	27	26	22	26	27	26	22	25	26	26	22	23	24	24	21
1250	kW	2.91	2.97	3.07	3.17	3.14	3.21	3.31	3.42	3.34	3.41	3.52	3.64	3.51	3.59	3.71	3.84	3.66	3.75	3.87	4.00	3.79	3.88	4.01	4.15
	Amps	13.1	13.4	13.7	14.2	14.0	14.3	14.7	15.2	15.0	15.3	15.8	16.3	15.9	16.3	16.7	17.3	16.8	17.2	17.7	18.3	17.7	18.1	18.6	19.2
	Hi PR	161	174	183	191	181	195	206	215	206	222	234	244	235	253	267	278	264	284	300	313	292	314	331	346
	Lo PR	69	73	80	85	72	77	84	90	75	80	87	93	79	84	92	98	83	88	96	103	86	91	100	106
	MBh	41.1	41.8	43.8	46.8	40.1	40.9	42.8	45.7	39.1	39.9	41.8	44.6	38.2	38.9	40.8	43.5	36.3	37.0	38.7	41.3	33.6	34.3	35.9	38.3
1250	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	28	28	26	23	28	28	26	23	28	28	26	23	28	28	27	23	27	27	26	23	25	25	25	21
	kW	2.87	2.93	3.03	3.12	3.09	3.16	3.26	3.37	3.29	3.36	3.47	3.59	3.46	3.54	3.66	3.78	3.61	3.69	3.82	3.95	3.74	3.82	3.95	4.09
	Amps	12.9	13.2	13.6	14.0	13.8	14.1	14.5	15.0	14.8	15.1	15.6	16.1	15.7	16.0	16.5	17.0	16.6	16.9	17.4	18.0	17.4	17.8	18.4	19.0
	Hi PR	159	171	180	188	178	192	202	211	203	218	230	240	231	248	262	273	259	279	295	308	287	309	326	340
	Lo PR	67	72	78	83	71	76	83	88	74	79	86	92	78	83	90	96	82	87	95	101	84	90	98	104

Shaded area reflects ARI conditions
High and low pressures are measured at the liquid and suction service valves.

IDB: Entering Indoor Dry Bulb Temperature
kW = Total system power
Amps = outdoor unit amps (comp. + fan)

EXPANDED COOLING DATA — GPG1348***1A

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Entering Indoor Wet Bulb Temperature																																			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1610	MBh	45.4	47.0	51.5	-	44.3	45.9	50.3	-	43.2	44.8	49.1	-	42.2	43.7	47.9	-	40.1	41.5	45.5	-	37.1	38.5	42.2	-	37.1	38.5	42.2	-							
		S/T	0.76	0.63	0.44	-	0.78	0.66	0.45	-	0.80	0.67	0.47	-	0.83	0.69	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-							
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-							
		kW	3.32	3.39	3.48	-	3.55	3.62	3.72	-	3.75	3.82	3.93	-	3.93	4.00	4.12	-	4.07	4.16	4.28	-	4.20	4.29	4.42	-	4.20	4.29	4.42	-							
		Amps	14.3	14.6	15.0	-	15.2	15.5	16.0	-	16.3	16.7	17.1	-	17.3	17.6	18.1	-	18.2	18.6	19.2	-	19.2	19.6	20.2	-	19.2	19.6	20.2	-							
	1510	Hi PR	145	156	165	-	163	175	185	-	185	199	211	-	211	227	240	-	237	256	270	-	262	282	298	-	262	282	298	-							
		Lo PR	66	70	77	-	70	74	81	-	73	77	84	-	76	81	88	-	80	85	93	-	83	88	96	-	83	88	96	-							
		MBh	44.9	46.5	51.0	-	43.9	45.5	49.8	-	42.8	44.4	48.6	-	41.8	43.3	47.4	-	39.7	41.1	45.1	-	36.8	38.1	41.7	-	36.8	38.1	41.7	-							
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.81	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-							
		ΔT	20	18	13	-	21	18	13	-	21	18	14	-	21	18	14	-	20	18	13	-	19	17	13	-	19	17	13	-							
	1410	kW	3.32	3.38	3.47	-	3.54	3.61	3.71	-	3.74	3.81	3.93	-	3.92	3.99	4.11	-	4.07	4.15	4.27	-	4.19	4.28	4.41	-	4.19	4.28	4.41	-							
Amps		14.2	14.5	14.9	-	15.2	15.5	15.9	-	16.3	16.6	17.1	-	17.2	17.6	18.1	-	18.2	18.6	19.1	-	19.1	19.5	20.1	-	19.1	19.5	20.1	-								
Hi PR		145	156	165	-	162	175	185	-	185	199	210	-	210	226	239	-	237	255	269	-	262	281	297	-	262	281	297	-								
Lo PR		66	70	76	-	70	74	81	-	72	77	84	-	76	81	88	-	80	85	92	-	82	88	96	-	82	88	96	-								
MBh		44.2	45.8	50.2	-	43.2	44.8	49.1	-	42.2	43.7	47.9	-	41.1	42.6	46.7	-	39.1	40.5	44.4	-	36.2	37.5	41.1	-	36.2	37.5	41.1	-								
	S/T	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.45	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-								
	ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-	19	17	13	-								
	kW	3.28	3.34	3.43	-	3.50	3.57	3.67	-	3.69	3.77	3.88	-	3.87	3.94	4.06	-	4.01	4.09	4.22	-	4.14	4.22	4.35	-	4.14	4.22	4.35	-								
	Amps	14.1	14.3	14.7	-	15.0	15.3	15.7	-	16.1	16.4	16.9	-	17.0	17.4	17.9	-	17.9	18.3	18.9	-	18.9	19.3	19.8	-	18.9	19.3	19.8	-								
	Hi PR	142	153	162	-	160	172	181	-	182	195	206	-	207	223	235	-	233	250	264	-	257	277	292	-	257	277	292	-								
	Lo PR	65	69	75	-	68	73	79	-	71	76	83	-	75	79	87	-	78	83	91	-	81	86	94	-	81	86	94	-								

1610	MBh	46.1	47.5	51.4	55.2	45.1	46.4	50.2	53.9	44.0	45.3	49.0	52.6	42.9	44.2	47.8	51.3	40.8	42.0	45.4	48.8	37.8	38.9	42.1	45.2
	S/T	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.91	0.82	0.62	0.40	0.94	0.84	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.88	0.67	0.43
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11
	kW	3.35	3.41	3.51	3.61	3.58	3.64	3.75	3.86	3.78	3.85	3.96	4.08	3.96	4.03	4.15	4.28	4.11	4.19	4.32	4.45	4.24	4.32	4.46	4.59
	Amps	14.4	14.7	15.1	15.5	15.3	15.7	16.1	16.6	16.5	16.8	17.3	17.8	17.4	17.8	18.3	18.9	18.4	18.8	19.3	20.0	19.3	19.7	20.3	21.0
	Hi PR	147	158	167	174	165	177	187	195	187	201	213	222	213	229	242	253	240	258	273	284	265	285	301	314
	Lo PR	67	71	77	83	70	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103
	MBh	45.7	47.0	50.9	54.6	44.6	45.9	49.7	53.4	43.5	44.8	48.5	52.1	42.5	43.7	47.3	50.8	40.4	41.6	45.0	48.3	37.4	38.5	41.7	44.7
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	23	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	24	22	18	12	22	20	17	11
75	kW	3.34	3.40	3.50	3.60	3.57	3.64	3.74	3.85	3.77	3.84	3.96	4.07	3.95	4.03	4.15	4.27	4.10	4.18	4.31	4.44	4.23	4.31	4.45	4.58
	Amps	14.4	14.6	15.0	15.5	15.3	15.6	16.1	16.6	16.4	16.8	17.2	17.8	17.4	17.7	18.3	18.8	18.3	18.7	19.3	19.9	19.3	19.7	20.3	21.0
	Hi PR	146	157	166	173	164	177	186	195	187	201	212	221	213	229	242	252	239	257	272	283	264	284	300	313
	Lo PR	67	71	77	82	70	75	82	87	73	78	85	90	77	82	89	95	80	86	93	99	83	88	97	103
	MBh	45.0	46.3	50.1	53.8	43.9	45.2	49.0	52.6	42.9	44.2	47.8	51.3	41.8	43.1	46.6	50.0	39.8	40.9	44.3	47.5	36.8	37.9	41.0	44.0
	S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.59	0.38	0.89	0.80	0.60	0.39	0.93	0.83	0.63	0.40	0.93	0.84	0.63	0.41
1410	ΔT	24	22	18	12	24	22	18	13	24	22	18	13	24	22	18	13	24	22	18	13	22	21	17	12
	kW	3.30	3.36	3.46	3.55	3.52	3.59	3.69	3.80	3.72	3.79	3.91	4.02	3.90	3.97	4.09	4.22	4.04	4.13	4.25	4.38	4.17	4.26	4.39	4.52
	Amps	14.2	14.5	14.8	15.3	15.1	15.4	15.8	16.3	16.2	16.5	17.0	17.5	17.1	17.5	18.0	18.6	18.1	18.5	19.0	19.6	19.0	19.4	20.0	20.7
	Hi PR	144	155	163	170	161	174	183	191	183	197	208	217	209	225	237	248	235	253	267	279	260	280	295	308
	Lo PR	65	70	76	81	69	73	80	85	72	76	83	89	75	80	88	93	79	84	92	98	82	87	95	101
	Shaded area reflects ACCA (TVA) conditions IDB: Entering Indoor Dry Bulb Temperature kW = Total system power Amps = outdoor unit amps (comp.+fan) High and low pressures are measured at the liquid and suction service valves.																								

EXPANDED COOLING DATA — GPG1348***1A (CONT.)

		Outdoor Ambient Temperature																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		Entering Indoor Wet Bulb Temperature																																															
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
80	MBh	46.9	48.0	51.2	54.8	45.9	46.9	50.1	53.5	44.8	45.7	48.9	52.2	43.7	44.6	47.7	51.0	41.5	42.4	45.3	48.4	38.4	39.3	42.0	44.8	38.4	39.3	42.0	44.8																				
	S/T	0.94	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.94	0.77	0.57	1.00	0.97	0.79	0.59	1.00	1.00	0.82	0.61	1.00	1.00	0.83	0.62	1.00	1.00	0.83	0.62																				
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	25	25	22	17	24	24	21	17	22	22	20	16	22	22	20	16																				
	kW	3.37	3.43	3.53	3.63	3.60	3.67	3.78	3.89	3.81	3.88	3.99	4.11	3.99	4.07	4.19	4.31	4.14	4.22	4.35	4.48	4.27	4.36	4.49	4.63	4.27	4.36	4.49	4.63																				
	Amps	14.5	14.8	15.2	15.7	15.5	15.8	16.2	16.7	16.6	16.9	17.4	18.0	17.6	17.9	18.4	19.0	18.5	18.9	19.5	20.1	19.5	19.9	20.5	21.2	19.5	19.9	20.5	21.2																				
	Hi PR	148	159	168	176	166	179	189	197	189	203	215	224	215	232	245	255	242	261	275	287	268	288	304	317	268	288	304	317																				
	Lo PR	67	72	78	83	71	76	83	88	74	79	86	92	78	83	90	96	81	87	95	101	84	90	98	104	84	90	98	104																				
	MBh	46.5	47.5	50.7	54.2	45.4	46.4	49.6	53.0	44.3	45.3	48.4	51.7	43.2	44.2	47.2	50.5	41.1	42.0	44.8	47.9	38.0	38.9	41.5	44.4	38.0	38.9	41.5	44.4																				
	S/T	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.99	0.80	0.60	1.00	1.00	0.81	0.61	1.00	1.00	0.81	0.61																				
	ΔT	26	25	22	17	27	25	22	18	27	25	22	18	26	26	22	18	25	25	22	18	23	24	21	16	23	24	21	16																				
	kW	3.36	3.43	3.52	3.62	3.59	3.66	3.77	3.88	3.80	3.87	3.99	4.11	3.98	4.06	4.18	4.30	4.13	4.21	4.34	4.47	4.26	4.35	4.48	4.62	4.26	4.35	4.48	4.62																				
Amps	14.5	14.8	15.2	15.6	15.4	15.7	16.2	16.7	16.6	16.9	17.4	17.9	17.5	17.9	18.4	19.0	18.5	18.9	19.4	20.1	19.4	19.9	20.4	21.1	19.4	19.9	20.4	21.1																					
Hi PR	148	159	168	175	166	178	188	196	189	203	214	223	215	231	244	254	242	260	275	286	267	287	303	316	267	287	303	316																					
Lo PR	67	71	78	83	71	76	82	88	74	78	86	91	77	82	90	96	81	86	94	100	84	89	98	104	84	89	98	104																					
1410	MBh	45.8	46.8	50.0	53.4	44.7	45.7	48.8	52.2	43.7	44.6	47.7	50.9	42.6	43.5	46.5	49.7	40.5	41.3	44.2	47.2	37.5	38.3	40.9	43.7	37.5	38.3	40.9	43.7																				
	S/T	0.89	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	1.00	0.95	0.78	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58																				
	ΔT	27	26	22	18	27	26	22	18	27	26	23	18	27	26	23	18	26	26	22	18	24	24	21	17	24	24	21	17																				
	kW	3.32	3.39	3.48	3.58	3.55	3.62	3.72	3.83	3.75	3.82	3.93	4.05	3.93	4.00	4.12	4.25	4.08	4.16	4.28	4.41	4.20	4.29	4.42	4.56	4.20	4.29	4.42	4.56																				
	Amps	14.3	14.6	15.0	15.4	15.2	15.5	16.0	16.5	16.3	16.7	17.1	17.7	17.3	17.6	18.2	18.7	18.2	18.6	19.2	19.8	19.2	19.6	20.2	20.8	19.2	19.6	20.2	20.8																				
	Hi PR	145	156	165	172	163	175	185	193	185	199	211	220	211	227	240	250	237	256	270	281	262	282	298	311	262	282	298	311																				
	Lo PR	66	70	77	82	70	74	81	86	73	77	84	90	76	81	88	94	80	85	93	99	83	88	96	102	83	88	96	102																				

1610	MBh	47.8	48.7	51.0	54.4	46.7	47.6	49.8	53.1	45.5	46.4	48.6	51.9	44.4	45.3	47.4	50.6	42.2	43.0	45.1	48.1	39.1	39.9	41.7	44.5
	S/T	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80
	ΔT	27	27	25	22	27	27	25	22	26	27	25	22	25	26	26	22	24	25	25	22	22	23	24	20
	kW	3.39	3.46	3.56	3.66	3.63	3.70	3.81	3.92	3.83	3.91	4.02	4.15	4.02	4.10	4.22	4.35	4.17	4.25	4.38	4.52	4.30	4.39	4.53	4.67
	Amps	14.6	14.9	15.3	15.8	15.6	15.9	16.3	16.9	16.7	17.1	17.5	18.1	17.7	18.1	18.6	19.2	18.7	19.1	19.6	20.3	19.6	20.1	20.7	21.4
	Hi PR	150	161	170	177	168	181	191	199	191	206	217	226	218	234	247	258	245	263	278	290	270	291	307	320
	Lo PR	68	72	79	84	72	76	84	89	75	80	87	92	78	84	91	97	82	88	96	102	85	91	99	105
	MBh	47.3	48.2	50.5	53.9	46.2	47.1	49.3	52.6	45.1	46.0	48.1	51.4	44.0	44.8	47.0	50.1	41.8	42.6	44.6	47.6	38.7	39.5	41.3	44.1
	S/T	0.97	0.94	0.84	0.69	1.00	0.97	0.88	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	28	27	26	22	28	28	26	23	27	28	26	23	27	27	27	23	25	26	26	23	24	24	24	21
	1510	kW	3.39	3.45	3.55	3.65	3.62	3.69	3.80	3.91	3.82	3.90	4.02	4.14	4.01	4.09	4.21	4.34	4.16	4.24	4.37	4.51	4.29	4.38	4.51
Amps		14.6	14.9	15.3	15.7	15.5	15.9	16.3	16.8	16.7	17.0	17.5	18.1	17.7	18.0	18.5	19.2	18.6	19.0	19.6	20.2	19.6	20.0	20.6	21.3
Hi PR		149	161	170	177	167	180	190	198	190	205	216	226	217	233	246	257	244	263	277	289	270	290	306	319
Lo PR		68	72	79	84	72	76	83	89	75	79	87	92	78	83	91	97	82	87	95	101	85	90	99	105
MBh		46.6	47.5	49.7	53.1	45.5	46.4	48.6	51.8	44.4	45.3	47.4	50.6	43.3	44.2	46.3	49.4	41.2	42.0	43.9	46.9	38.1	38.9	40.7	43.4
S/T		0.94	0.90	0.81	0.66	0.97	0.94	0.84	0.69	0.99	0.96	0.87	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.94	0.76
ΔT		28	28	26	23	29	28	27	23	29	28	27	23	28	29	27	23	27	27	27	23	25	25	25	21
kW		3.35	3.41	3.51	3.61	3.57	3.64	3.75	3.86	3.78	3.85	3.96	4.08	3.95	4.03	4.15	4.28	4.11	4.19	4.32	4.45	4.24	4.32	4.45	4.59
Amps		14.4	14.7	15.1	15.5	15.3	15.7	16.1	16.6	16.5	16.8	17.3	17.8	17.4	17.8	18.3	18.9	18.4	18.8	19.3	20.0	19.3	19.7	20.3	21.0
Hi PR		147	158	167	174	165	177	187	195	187	201	213	222	213	229	242	253	240	258	273	284	265	285	301	314
Lo PR		67	71	77	83	70	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103
1410	Shaded area reflects ARI conditions																								
	IDB: Entering Indoor Dry Bulb Temperature																								
	kW = Total system power																								
	Amps = outdoor unit amps (comp.+fan)																								
	High and low pressures are measured at the liquid and suction service valves.																								

EXPANDED COOLING DATA — GPG1360***1A — SINGLE STAGE

		Outdoor Ambient Temperature																																					
		65°F						75°F						85°F						95°F						105°F						115°F							
		Entering Indoor Wet Bulb Temperature																																					
		IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70		MBh	41.1	42.6	46.7	-	40.2	41.6	45.6	-	39.2	40.6	44.5	-	38.3	39.7	43.4	-	36.3	37.7	41.3	-	33.7	34.9	38.2	-													
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-													
		ΔT	19	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-													
	1450	kW	2.98	3.04	3.13	-	3.20	3.26	3.36	-	3.39	3.45	3.56	-	3.55	3.62	3.74	-	3.69	3.77	3.89	-	3.81	3.89	4.02	-													
		Amps	13.0	13.3	13.6	-	13.9	14.1	14.5	-	14.8	15.1	15.5	-	15.6	15.9	16.4	-	16.5	16.8	17.3	-	17.3	17.6	18.1	-													
		Hi PR	139	149	158	-	156	167	177	-	177	190	201	-	202	217	229	-	227	244	258	-	251	270	285	-													
		Lo PR	66	70	77	-	70	74	81	-	73	77	84	-	76	81	88	-	80	85	93	-	83	88	96	-													
		MBh	40.7	42.2	46.2	-	39.8	41.2	45.2	-	38.8	40.2	44.1	-	37.9	39.3	43.0	-	36.0	37.3	40.9	-	33.3	34.5	37.9	-													
		S/T	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.80	0.66	0.46	-	0.83	0.69	0.48	-	0.83	0.70	0.48	-													
		ΔT	20	17	13	-	20	18	13	-	20	18	13	-	21	18	13	-	20	18	13	-	19	16	12	-													
	1350	kW	2.98	3.04	3.13	-	3.19	3.25	3.35	-	3.38	3.45	3.55	-	3.54	3.62	3.73	-	3.68	3.76	3.88	-	3.80	3.88	4.01	-													
	Amps	13.0	13.3	13.6	-	13.8	14.1	14.5	-	14.8	15.1	15.5	-	15.6	15.9	16.3	-	16.4	16.8	17.2	-	17.2	17.6	18.1	-														
	Hi PR	138	149	157	-	155	167	176	-	176	190	200	-	201	216	228	-	226	243	257	-	250	269	284	-														
	Lo PR	66	70	76	-	70	74	81	-	72	77	84	-	76	81	88	-	80	85	92	-	82	88	96	-														
1250		MBh	40.1	41.6	45.5	-	39.2	40.6	44.5	-	38.2	39.6	43.4	-	37.3	38.7	42.4	-	35.4	36.7	40.3	-	32.8	34.0	37.3	-													
		S/T	0.70	0.58	0.40	-	0.72	0.61	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-													
		ΔT	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	21	18	14	-	19	17	13	-													
		kW	2.94	3.00	3.09	-	3.15	3.21	3.31	-	3.33	3.40	3.50	-	3.50	3.57	3.68	-	3.63	3.71	3.83	-	3.75	3.83	3.95	-													
		Amps	12.9	13.1	13.4	-	13.7	13.9	14.3	-	14.6	14.9	15.3	-	15.4	15.7	16.1	-	16.2	16.5	17.0	-	17.0	17.3	17.8	-													
		Hi PR	136	146	154	-	152	164	173	-	173	187	197	-	198	213	224	-	222	239	253	-	246	264	279	-													
		Lo PR	65	69	75	-	68	73	79	-	71	76	83	-	75	79	87	-	78	83	91	-	81	86	94	-													
	75		MBh	41.4	42.6	46.1	49.5	40.4	41.6	45.1	48.4	39.5	40.7	44.0	47.2	38.5	39.7	42.9	46.1	36.6	37.7	40.8	43.8	33.9	34.9	37.8	40.5	33.9	34.9	37.8	40.5	33.9	34.9	37.8	40.5	33.9	34.9	37.8	40.5
			S/T	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.94	0.84	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41	0.95	0.85	0.64	0.41
			ΔT	23	21	18	12	24	22	18	12	24	22	18	12	24	22	18	12	23	22	18	12	22	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11
			kW	3.00	3.06	3.15	3.24	3.21	3.28	3.38	3.48	3.40	3.47	3.58	3.69	3.57	3.65	3.76	3.88	3.71	3.79	3.91	4.03	3.84	3.92	4.04	4.17	3.84	3.92	4.04	4.17	3.84	3.92	4.04	4.17	3.84	3.92	4.04	4.17
		Amps	13.1	13.4	13.7	14.1	13.9	14.2	14.6	15.0	14.9	15.2	15.6	16.1	15.7	16.0	16.5	17.0	16.5	16.9	17.4	17.9	17.4	17.8	18.8	18.8	17.4	17.8	18.8	18.8	17.4	17.8	18.8	18.8	17.4	17.8	18.8	18.8	

EXPANDED COOLING DATA — GPG1360***1A — SINGLE STAGE (CONT.)

		Outdoor Ambient Temperature																									
		65°F				75°F				85°F				95°F				105°F				115°F					
		Entering Indoor Wet Bulb Temperature																									
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80		MBh	42.6	43.5	46.5	49.7	41.6	42.5	45.4	48.5	40.6	41.5	44.3	47.4	39.6	40.5	43.2	46.2	37.6	38.4	41.1	43.9	34.8	35.6	38.0	40.7	
		S/T	0.92	0.86	0.70	0.53	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.56	1.00	0.95	0.77	0.58	1.00	0.98	0.80	0.60	1.00	1.00	0.81	0.60	
		ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	24	24	21	17	22	23	19	16	
	1450	kW	3.03	3.09	3.18	3.28	3.25	3.31	3.41	3.52	3.44	3.51	3.62	3.73	3.61	3.68	3.80	3.92	3.75	3.83	3.95	4.08	3.88	3.96	4.08	4.21	
		Amps	13.2	13.5	13.8	14.2	14.1	14.3	14.7	15.2	15.0	15.3	15.7	16.2	15.9	16.2	16.6	17.2	16.7	17.1	17.5	18.1	17.5	17.9	18.4	19.0	
		Hi PR	141	152	161	168	159	171	180	188	181	194	205	214	206	221	234	244	231	249	263	274	256	275	290	303	
		Lo PR	67	72	78	83	71	76	83	88	74	79	86	92	78	83	90	96	81	87	95	101	84	90	98	104	
		MBh	42.1	43.1	46.0	49.2	41.2	42.1	44.9	48.0	40.2	41.1	43.9	46.9	39.2	40.1	42.8	45.8	37.2	38.1	40.7	43.5	34.5	35.3	37.7	40.3	
		S/T	0.90	0.85	0.69	0.52	0.94	0.88	0.72	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.97	0.79	0.59	1.00	0.97	0.79	0.59	
		ΔT	26	25	22	17	26	25	22	17	26	25	22	18	26	25	22	18	25	25	22	17	23	23	20	16	
1350		kW	3.02	3.08	3.17	3.27	3.24	3.30	3.40	3.51	3.43	3.50	3.61	3.72	3.60	3.67	3.79	3.91	3.74	3.82	3.94	4.07	3.87	3.95	4.07	4.20	
		Amps	13.2	13.4	13.8	14.2	14.0	14.3	14.7	15.1	15.0	15.3	15.7	16.2	15.8	16.2	16.6	17.1	16.7	17.0	17.5	18.0	17.5	17.9	18.4	19.0	
		Hi PR	141	152	160	167	158	170	180	188	180	194	205	213	205	221	233	243	231	248	262	273	255	274	290	302	
		Lo PR	67	71	78	83	71	76	82	88	74	78	86	91	77	82	90	96	81	86	94	100	84	89	98	104	
		MBh	41.5	42.4	45.3	48.4	40.5	41.4	44.3	47.3	39.6	40.4	43.2	46.2	38.6	39.5	42.2	45.1	36.7	37.5	40.1	42.8	34.0	34.7	37.1	39.7	
		S/T	0.87	0.82	0.67	0.50	0.90	0.85	0.69	0.52	0.93	0.87	0.71	0.53	0.96	0.90	0.73	0.55	0.99	0.93	0.76	0.57	1.00	0.94	0.76	0.57	
		ΔT	27	26	22	18	27	26	22	18	27	26	22	18	27	26	23	18	27	26	22	18	25	24	21	17	
	1250		kW	2.98	3.04	3.13	3.23	3.20	3.26	3.36	3.46	3.39	3.45	3.56	3.67	3.55	3.62	3.74	3.85	3.69	3.77	3.89	4.01	3.81	3.89	4.02	4.15
			Amps	13.0	13.3	13.6	14.0	13.9	14.1	14.5	14.9	14.8	15.1	15.5	16.0	15.6	15.9	16.4	16.9	16.5	16.8	17.3	17.8	17.3	17.6	18.1	18.7
			Hi PR	139	149	158	164	156	167	177	184	177	190	201	210	202	217	229	239	227	244	258	269	251	270	285	297
		Lo PR	66	70	77	82	70	74	81	86	73	77	84	90	76	81	88	94	80	85	93	99	83	88	96	102	

1450	MBh	43.3	44.1	46.2	49.3	42.3	43.1	45.2	48.2	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	38.3	39.0	40.9	43.6	35.5	36.1	37.9	40.4
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78
	ΔT	27	26	25	21	27	26	25	22	26	26	25	22	26	26	25	22	24	25	25	21	22	23	23	20
	kW	3.05	3.11	3.20	3.30	3.27	3.34	3.44	3.54	3.46	3.54	3.64	3.76	3.64	3.71	3.83	3.95	3.78	3.86	3.98	4.11	3.91	3.99	4.12	4.25
	Amps	13.3	13.6	13.9	14.3	14.2	14.4	14.8	15.3	15.1	15.4	15.9	16.4	16.0	16.3	16.8	17.3	16.8	17.2	17.7	18.2	17.7	18.0	18.6	19.2
	Hi PR	143	154	162	169	160	173	182	190	182	196	207	216	208	224	236	246	234	251	266	277	258	278	293	306
	Lo PR	68	72	79	84	72	76	84	89	75	80	87	92	78	84	91	97	82	88	96	102	85	91	99	105
	MBh	42.9	43.7	45.8	48.8	41.9	42.7	44.7	47.7	40.9	41.7	43.7	46.6	39.9	40.7	42.6	45.4	37.9	38.6	40.5	43.2	35.1	35.8	37.5	40.0
	S/T	0.95	0.91	0.83	0.67	0.98	0.95	0.86	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	28	27	26	22	28	28	26	23	28	28	26	23	27	28	26	23	26	26	26	22	24	24	24	21
1350	kW	3.05	3.11	3.20	3.29	3.26	3.33	3.43	3.54	3.46	3.53	3.64	3.75	3.63	3.70	3.82	3.94	3.77	3.85	3.97	4.10	3.90	3.98	4.11	4.24
	Amps	13.3	13.5	13.9	14.3	14.1	14.4	14.8	15.2	15.1	15.4	15.8	16.3	16.0	16.3	16.7	17.3	16.8	17.1	17.6	18.2	17.6	18.0	18.5	19.1
	Hi PR	142	153	162	169	160	172	182	189	182	196	207	216	207	223	235	245	233	251	265	276	257	277	293	305
	Lo PR	68	72	79	84	72	76	83	89	75	79	87	92	78	83	91	97	82	87	95	101	85	90	99	105
	MBh	42.2	43.1	45.1	48.1	41.3	42.1	44.0	47.0	40.3	41.1	43.0	45.9	39.3	40.1	41.9	44.8	37.3	38.0	39.8	42.5	34.6	35.2	36.9	39.4
	S/T	0.91	0.88	0.80	0.65	0.95	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.97	0.87	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.91	0.74
	ΔT	28	28	26	23	29	28	27	23	29	28	27	23	29	29	27	23	27	28	27	23	25	26	25	21
	kW	3.01	3.07	3.16	3.25	3.22	3.29	3.39	3.49	3.41	3.48	3.59	3.70	3.58	3.65	3.77	3.89	3.72	3.80	3.92	4.04	3.84	3.93	4.05	4.18
	Amps	13.1	13.4	13.7	14.1	14.0	14.2	14.6	15.0	14.9	15.2	15.6	16.1	15.8	16.1	16.5	17.0	16.6	16.9	17.4	17.9	17.4	17.8	18.3	18.9
	Hi PR	140	151	159	166	157	169	179	186	179	192	203	212	204	219	231	241	229	246	260	271	253	272	288	300
	Lo PR	67	71	77	83	70	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103

Shaded area reflects ARI conditions IDB: Entering Indoor Dry Bulb Temperature kW = Total system power Amps = outdoor unit amps (comp. +fan)
 High and low pressures are measured at the liquid and suction service valves.


EXPANDED COOLING DATA — GPG1360***1A — Two STAGE

IDB		Outdoor Ambient Temperature												115°F																																			
		65°F						75°F						85°F						95°F						105°F						115°F																	
		Entering Indoor Wet Bulb Temperature																																															
Airflow		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																				
70	MBh	54.6	56.6	62.0	-	53.3	55.3	60.5	-	52.0	53.9	59.1	-	50.8	52.6	57.7	-	48.2	50.0	54.8	-	44.7	46.3	50.7	-	44.7	46.3	50.7	-																				
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-																				
	ΔT	19	17	13	-	19	17	13	-	20	17	13	-	20	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-																				
	kW	4.35	4.44	4.57	-	4.66	4.75	4.90	-	4.93	5.03	5.18	-	5.17	5.28	5.44	-	5.38	5.49	5.66	-	5.55	5.67	5.84	-	5.55	5.67	5.84	-																				
	Amps	20.3	20.6	21.1	-	21.5	21.8	22.4	-	22.8	23.2	23.8	-	24.0	24.5	25.1	-	25.2	25.7	26.3	-	26.4	26.9	27.6	-	26.4	26.9	27.6	-																				
	Hi PR	154	166	175	-	173	186	197	-	197	212	224	-	224	241	255	-	252	271	286	-	278	300	316	-	278	300	316	-																				
	Lo PR	65	69	76	-	69	73	80	-	72	76	83	-	75	80	87	-	79	84	92	-	82	87	95	-	82	87	95	-																				
	MBh	54.0	56.0	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	50.3	52.1	57.1	-	47.8	49.5	54.2	-	44.2	45.8	50.2	-	44.2	45.8	50.2	-																				
	S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-																				
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	19	16	12	-																				
	kW	4.35	4.43	4.56	-	4.65	4.74	4.88	-	4.92	5.02	5.17	-	5.16	5.27	5.43	-	5.36	5.47	5.64	-	5.54	5.65	5.83	-	5.54	5.65	5.83	-																				
70	Amps	20.2	20.6	21.1	-	21.4	21.8	22.3	-	22.8	23.2	23.8	-	24.0	24.4	25.0	-	25.1	25.6	26.3	-	26.3	26.8	27.5	-	26.3	26.8	27.5	-																				
	Hi PR	154	165	175	-	172	186	196	-	196	211	223	-	223	240	254	-	251	270	286	-	278	299	315	-	278	299	315	-																				
	Lo PR	65	69	76	-	69	73	80	-	71	76	83	-	75	80	87	-	79	84	91	-	81	87	95	-	81	87	95	-																				
	MBh	53.2	55.2	60.4	-	52.0	53.9	59.0	-	50.8	52.6	57.6	-	49.5	51.3	56.2	-	47.0	48.8	53.4	-	43.6	45.2	49.5	-	43.6	45.2	49.5	-																				
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	0.80	0.66	0.46	-																				
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-																				
	kW	4.29	4.37	4.50	-	4.59	4.68	4.82	-	4.86	4.96	5.11	-	5.09	5.20	5.36	-	5.29	5.40	5.57	-	5.46	5.58	5.75	-	5.46	5.58	5.75	-																				
	Amps	20.0	20.4	20.8	-	21.2	21.5	22.1	-	22.5	22.9	23.5	-	23.7	24.1	24.7	-	24.8	25.3	26.0	-	26.0	26.5	27.2	-	26.0	26.5	27.2	-																				
	Hi PR	151	163	172	-	170	182	193	-	193	207	219	-	220	236	250	-	247	266	281	-	273	294	310	-	273	294	310	-																				
	Lo PR	64	68	74	-	68	72	79	-	70	75	82	-	74	79	86	-	77	82	90	-	80	85	93	-	80	85	93	-																				
	75	MBh	55.5	57.1	61.9	66.4	54.2	55.8	60.4	64.8	52.9	54.5	59.0	63.3	51.6	53.2	57.5	61.8	49.0	50.5	54.7	58.7	45.4	46.8	50.6	54.3	45.4	46.8	50.6	54.3																			
S/T		0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42																				
ΔT		22	20	17	12	23	21	17	12	23	21	17	12	23	21	17	12	22	21	17	12	21	19	16	11	21	19	16	11																				
kW		4.39	4.47	4.60	4.74	4.70	4.79	4.93	5.08	4.97	5.07	5.23	5.39	5.21	5.32	5.48	5.66	5.42	5.53	5.70	5.88	5.60	5.71	5.89	6.08	5.60	5.71	5.89	6.08																				
Amps		20.4	20.8	21.3	21.8	21.6	22.0	22.5	23.2	23.0	23.4	24.0	24.7	24.2	24.6	25.3	26.0	25.4	25.9	26.5	27.3	26.6	27.1	27.8	28.6	26.6	27.1	27.8	28.6																				
Hi PR		156	168	177	185	175	188	199	207	199	214	226	236	226	244	257	268	255	274	289	302	281	303	320	333	281	303	320	333																				
Lo PR		66	70	77	82	70	74	81	86	72	77	84	90	76	81	88	94	80	85	93	99	82	88	96	102	82	88	96	102																				
MBh		55.0	56.6	61.2	65.7	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.7	51.1	52.6	57.0	61.1	48.6	50.0	54.1	58.1	45.0	46.3	50.1	53.8	45.0	46.3	50.1	53.8																				
S/T		0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41	0.94	0.84	0.63	0.41																				
ΔT		23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	21	20	16	11																				
kW		4.38	4.46	4.59	4.73	4.69	4.78	4.92	5.07	4.96	5.06	5.21	5.37	5.20	5.31	5.47	5.64	5.41	5.52	5.69	5.87	5.58	5.70	5.88	6.07	5.58	5.70	5.88	6.07																				
75	Amps	20.4	20.7	21.2	21.8	21.6	21.9	22.5	23.1	22.9	23.4	23.9	24.6	24.1	24.6	25.2	26.0	25.3	25.8	26.5	27.3	26.5	27.0	27.7	28.6	26.5	27.0	27.7	28.6																				
	Hi PR	155	167	176	184	174	187	198	206	198	213	225	235	226	243	256	267	254	273	288	301	280	302	319	332	280	302	319	332																				
	Lo PR	66	70	76	81	69	74	81	86	72	77	84	89	76	81	88	94	80	85	92	98	82	87	96	102	82	87	96	102																				
	MBh	54.1	55.7	60.3	64.7	52.9	54.4	58.9	63.2	51.6	53.1	57.5	61.7	50.4	51.8	56.1	60.2	47.8	49.3	53.3	57.2	44.3	45.6	49.4	53.0	44.3	45.6	49.4	53.0																				
	S/T	0.79	0.70	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.90	0.80	0.61	0.39	0.90	0.81	0.61	0.39	0.90	0.81	0.61	0.39																				
	ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12	22	20	16	11	22	20	16	11																				
	kW	4.32	4.41	4.53	4.67	4.63	4.72	4.86	5.01	4.90	4.99	5.15	5.30	5.13	5.24	5.40	5.57	5.33	5.44	5.61	5.79	5.51	5.62	5.80	5.98	5.51	5.62	5.80	5.98																				
	Amps	20.1	20.5	21.0	21.5	21.3	21.7	22.2	22.8	22.7	23.1	23.7	24.3	23.8	24.3	24.9	25.6	25.0	25.5	26.2	26.9	26.2	26.7	27.4	28.2	26.2	26.7	27.4	28.2																				
Hi PR	153	164	173	181	171	184	195	203	195	210	221	231	222	239	252	263	250	269	284	296	276	297	313	327	276	297	313	327																					
Lo PR	65	69	75	80	68	73	79	84	71	76	82	88	75	79	87	92	78	83	91	97	81	86	94	100	81	86	94	100																					
Shaded area reflects ACCA (TVA) conditions																														kW = Total system power										Amps = outdoor unit amps (comp.+fan)									
High and low pressures are measured at the liquid and suction service valves.																																																	

EXPANDED COOLING DATA — GPG1360***1A – Two Stage (CONT.)


		Outdoor Ambient Temperature																																			
		65°F				75°F				85°F				95°F				105°F				115°F															
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	MBh	56.5	57.7	61.7	65.9	55.2	56.4	60.2	64.4	53.9	55.0	58.8	62.9	52.5	53.7	57.4	61.3	49.9	51.0	54.5	58.3	46.2	47.3	50.5	54.0												
	S/T	0.91	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.98	0.79	0.59	1.00	0.98	0.80	0.60												
	ΔT	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	24	24	21	17	22	22	19	16												
	kW	4.42	4.51	4.64	4.78	4.73	4.83	4.97	5.12	5.01	5.11	5.27	5.43	5.25	5.36	5.53	5.70	5.46	5.58	5.75	5.93	5.64	5.76	5.94	6.13												
	Amps	20.5	20.9	21.4	22.0	21.7	22.1	22.7	23.3	23.1	23.6	24.2	24.9	24.4	24.8	25.5	26.2	25.6	26.1	26.7	27.5	26.8	27.3	28.0	28.9												
	Hi PR	157	169	179	186	176	190	201	209	201	216	228	238	229	246	260	271	257	277	292	305	284	306	323	337												
	Lo PR	67	71	77	82	70	75	82	87	73	78	85	91	77	82	89	95	81	86	94	100	83	89	97	103												
	MBh	55.9	57.2	61.1	65.3	54.6	55.8	59.6	63.8	53.3	54.5	58.2	62.2	52.0	53.2	56.8	60.7	49.4	50.5	54.0	57.7	45.8	46.8	50.0	53.4												
	S/T	0.90	0.84	0.68	0.51	0.93	0.87	0.71	0.53	0.95	0.89	0.73	0.54	0.98	0.92	0.75	0.56	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.59												
	ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	25	25	21	17	23	23	20	16												
	kW	4.41	4.50	4.63	4.76	4.72	4.82	4.96	5.11	5.00	5.10	5.25	5.42	5.24	5.35	5.51	5.69	5.45	5.56	5.73	5.92	5.63	5.75	5.93	6.11												
85	Amps	20.5	20.9	21.4	21.9	21.7	22.1	22.6	23.3	23.1	23.5	24.1	24.8	24.3	24.8	25.4	26.2	25.5	26.0	26.7	27.5	26.7	27.2	27.9	28.8												
	Hi PR	157	169	178	186	176	189	200	209	200	215	227	237	228	245	259	270	256	276	291	304	283	305	322	336												
	Lo PR	66	71	77	82	70	75	82	87	73	78	85	90	77	82	89	95	80	85	93	99	83	88	96	103												
	MBh	55.1	56.3	60.1	64.3	53.8	55.0	58.7	62.8	52.5	53.7	57.3	61.3	51.2	52.4	55.9	59.8	48.7	49.7	53.2	56.8	45.1	46.1	49.2	52.6												
	S/T	0.86	0.81	0.66	0.49	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.56	0.99	0.93	0.76	0.57												
	ΔT	26	25	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16												
	kW	4.36	4.44	4.57	4.70	4.66	4.75	4.90	5.04	4.93	5.03	5.19	5.35	5.17	5.28	5.44	5.61	5.38	5.49	5.66	5.84	5.55	5.67	5.84	6.03												
	Amps	20.3	20.6	21.1	21.7	21.5	21.8	22.4	23.0	22.8	23.2	23.8	24.5	24.0	24.5	25.1	25.8	25.2	25.7	26.3	27.1	26.4	26.9	27.6	28.4												
	Hi PR	154	166	175	183	173	186	197	205	197	212	224	233	224	241	255	266	252	271	286	299	278	300	316	330												
	Lo PR	65	69	76	81	69	73	80	85	72	76	83	89	75	80	87	93	79	84	92	98	82	87	95	101												
	1710	MBh	57.5	58.6	61.4	65.5	56.1	57.2	59.9	63.9	54.8	55.9	58.5	62.4	53.5	54.5	57.1	60.9	50.8	51.8	54.2	57.9	47.1	48.0	50.2	53.6											
S/T		0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78												
ΔT		26	26	25	21	27	26	25	22	26	26	25	22	26	26	25	22	24	25	25	21	23	23	20	20												
kW		4.45	4.54	4.67	4.81	4.77	4.86	5.01	5.16	5.05	5.15	5.31	5.47	5.29	5.40	5.57	5.75	5.50	5.62	5.79	5.98	5.68	5.80	5.99	6.18												
Amps		20.7	21.0	21.5	22.1	21.9	22.3	22.8	23.5	23.3	23.7	24.3	25.0	24.5	25.0	25.6	26.4	25.7	26.2	26.9	27.7	26.9	27.5	28.2	29.1												
Hi PR		159	171	181	188	178	192	203	211	203	218	230	240	231	248	262	274	260	280	295	308	287	309	326	340												
Lo PR		67	72	78	83	71	76	83	88	74	79	86	91	78	83	90	96	81	87	94	101	84	90	98	104												
MBh		56.9	58.0	60.8	64.8	55.6	56.7	59.3	63.3	54.3	55.3	57.9	61.8	52.9	54.0	56.5	60.3	50.3	51.3	53.7	57.3	46.6	47.5	49.7	53.1												
S/T		0.94	0.91	0.82	0.66	0.97	0.94	0.85	0.69	1.00	0.96	0.87	0.71	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.94	0.76												
ΔT		27	27	25	22	27	27	26	22	28	27	26	22	27	27	26	22	26	26	25	22	24	24	21	21												
kW		4.44	4.53	4.66	4.80	4.76	4.85	5.00	5.15	5.04	5.14	5.30	5.46	5.28	5.39	5.56	5.73	5.49	5.61	5.78	5.96	5.67	5.79	5.97	6.16												
1710	Amps	20.6	21.0	21.5	22.1	21.9	22.2	22.8	23.4	23.3	23.7	24.3	25.0	24.5	24.9	25.6	26.3	25.7	26.2	26.9	27.7	26.9	27.4	28.2	29.0												
	Hi PR	158	170	180	188	178	191	202	211	202	218	230	240	230	248	262	273	259	279	294	307	286	308	325	339												
	Lo PR	67	71	78	83	71	75	82	88	74	78	86	91	77	82	90	96	81	86	94	100	84	89	97	104												
	MBh	56.1	57.1	59.8	63.8	54.8	55.8	58.5	62.4	53.4	54.5	57.1	60.9	52.1	53.2	55.7	59.4	49.5	50.5	52.9	56.4	45.9	46.8	49.0	52.3												
	S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.99	0.90	0.73	1.00	1.00	0.91	0.73												
	ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	26	22	25	25	24	21												
	kW	4.39	4.47	4.60	4.74	4.70	4.79	4.93	5.08	4.97	5.07	5.23	5.39	5.21	5.32	5.48	5.65	5.42	5.53	5.70	5.88	5.59	5.71	5.89	6.08												
	Amps	20.4	20.8	21.3	21.8	21.6	22.0	22.5	23.2	23.0	23.4	24.0	24.7	24.2	24.6	25.3	26.0	25.4	25.9	26.5	27.3	26.6	27.1	27.8	28.6												
	Hi PR	156	168	177	185	175	188	199	207	199	214	226	235	226	244	257	268	255	274	289	302	281	303	320	333												
	Lo PR	66	70	77	82	70	74	81	86	72	77	84	90	76	81	88	94	80	85	93	99	82	88	96	102												
	Shaded area reflects ARI conditions		IDB: Entering Indoor Dry Bulb Temperature												kW = Total system power												Amps = outdoor unit amps (comp.+fan)										
High and low pressures are measured at the liquid and suction service valves.																																					

DIMENSIONS

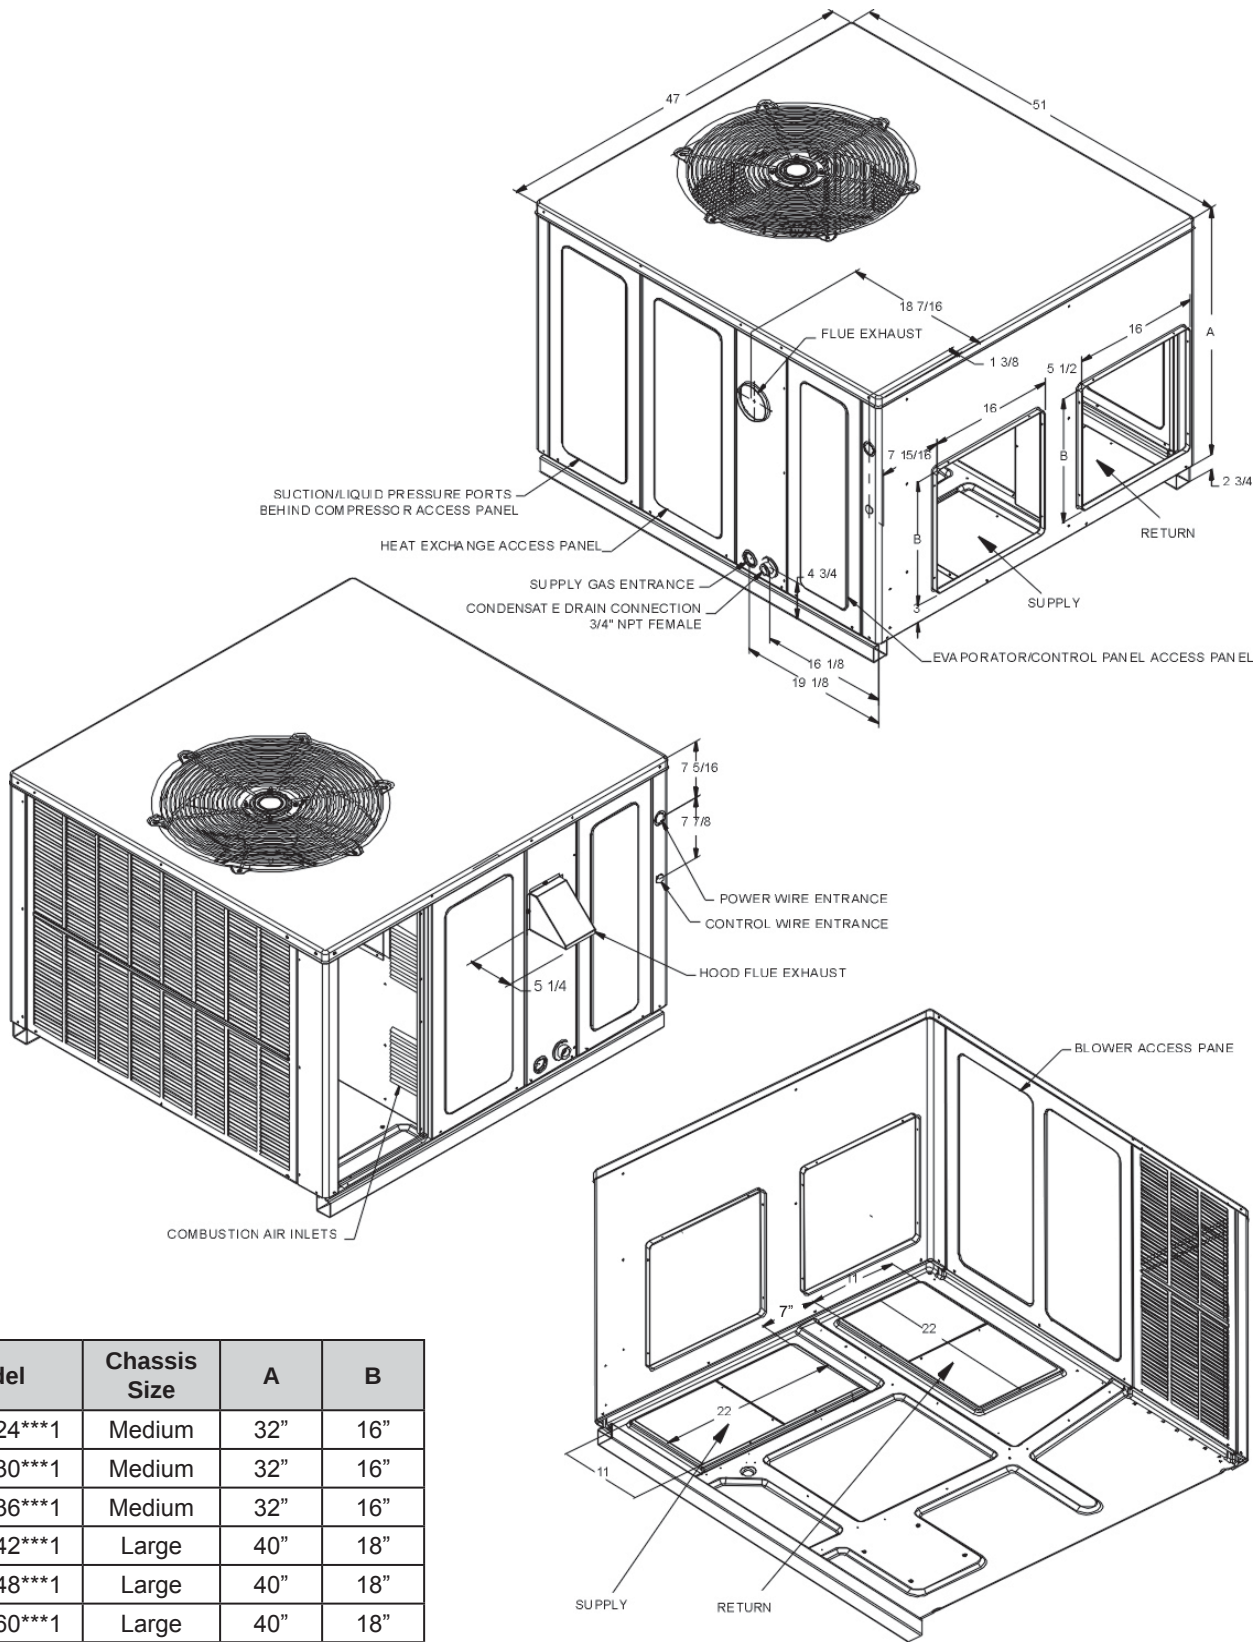


Model	Chassis Size	A	B
GPG1324***1	Medium	32"	16"
GPG1330***1	Medium	32"	16"
GPG1336***1	Medium	32"	16"
GPG1342***1	Large	40"	18"
GPG1348***1	Large	40"	18"
GPG1360***1	Large	40"	18"

WIRING DIAGRAM — GPG1324-42***1A*

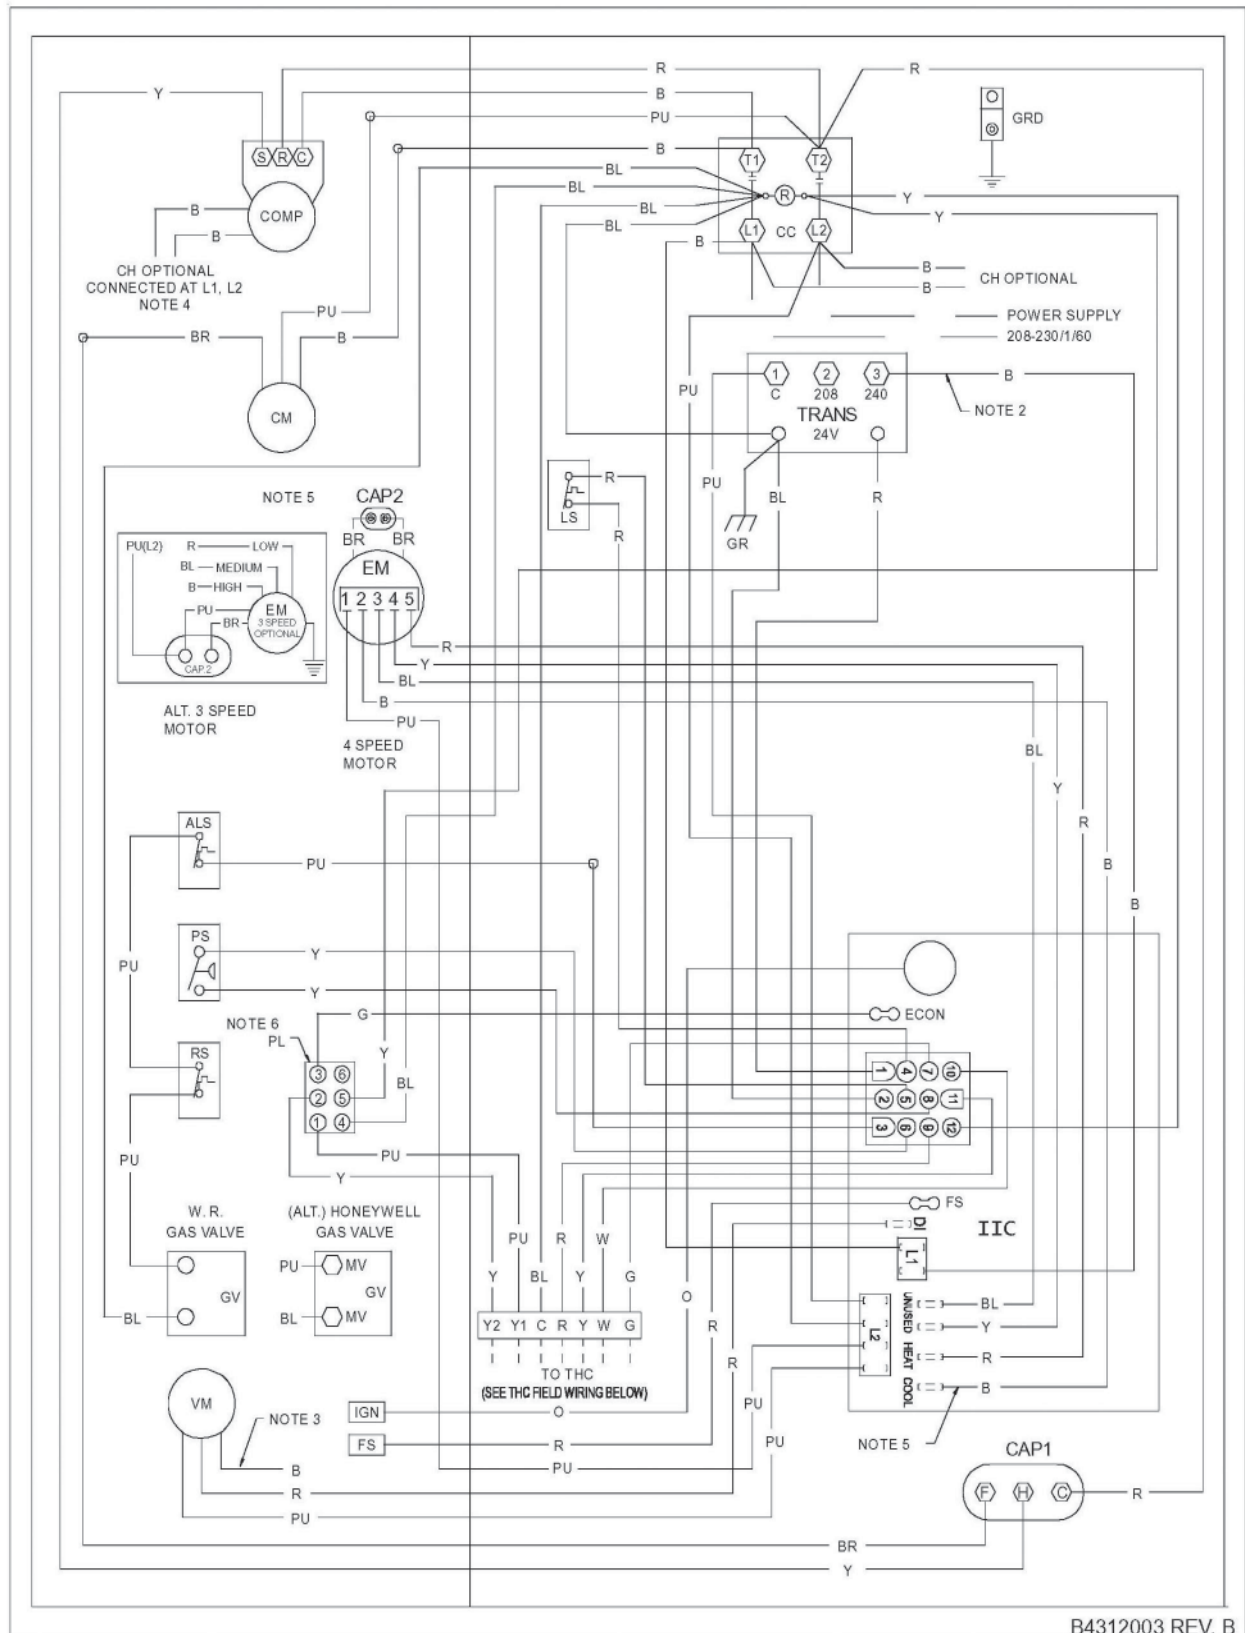

B4312003 REV. B

WIRING DIAGRAM — GPG1324-42***1A* (CONT.)

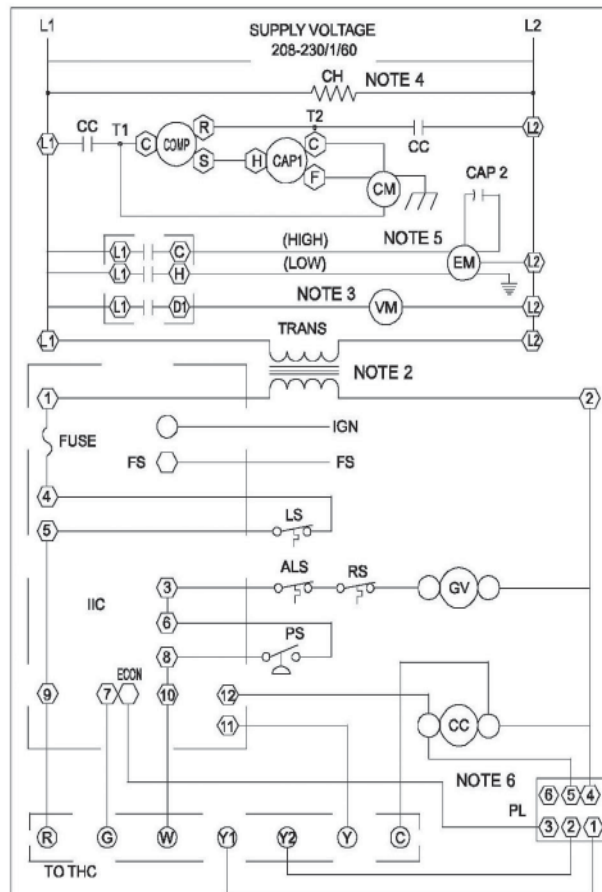

COMPONENT LEGEND

ALS AUXILIARY LIMIT SWITCH
CAP CAPACITOR
COMP COMPRESSOR
CM CONDENSER MOTOR
CC CONTACTOR
CH CRANKCASE HEATER
EM EVAPORATOR MOTOR
FS FLAME SENSOR
GV GAS VALVE
IIC INTEGRATED IGNITION CONTROL
IGN IGNITOR
LS LIMIT SWITCH
PL PLUG
PS PRESSURE SWITCH
RS ROLLOUT SWITCH
THC THERMOSTAT HEAT & COOL
TRANS TRANSFORMER
VM VENT MOTOR

• WIRE SPLICE
○ MARKED TERMINAL
○ UNMARKED TERMINAL

WIRING
— LINE VOLTAGE
— LOW VOLTAGE
— FIELD INSTALLED POWER
— FIELD INSTALLED CONTROL

WIRE CODE

B BLACK
BL BLUE
BR BROWN
G GREEN
O ORANGE
PK PINK
PU PURPLE
R RED
W WHITE
Y YELLOW

NOTES

1. REPLACEMENT WIRE MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (USE COPPER CONDUCTOR ONLY).
 2. FOR 208 VOLT TRANSFORMER OPERATION MOVE BLACK WIRE FROM TERMINAL (3) TO TERMINAL (2) ON TRANSFORMER.
 3. SOME MODELS HAVE VENT MOTORS EQUIPPED WITH A 230V LEAD (RED) AND A 208V (BLACK). IF EQUIPPED, CONNECT VENT MOTOR BLACK LEAD IN PLACE OF RED LEAD AT IIC (DI) FOR 208V OPERATION.
 4. CRANKCASE HEATER (OPTIONAL).
 5. FOR DIFFERENT THAN FACTORY SPEED TAP, CHANGE COOLING SPEED AT COOL TERMINAL (IIC). CHANGE HEATING SPEED AT HEAT TERMINAL (IIC).
- 4 SPEED MOTOR**
B - HIGH SPEED
BL - MEDIUM HIGH SPEED
Y - MEDIUM LOW SPEED
R - LOW SPEED
- 3 SPEED MOTOR**
B - HIGH SPEED
BL - MEDIUM SPEED
R - LOW SPEED

6. ACCESSORY ECONOMIZER PLUG (ON SELECT MODELS) ADJACENT TO BLOWER HOUSING IN RETURN AIR COMPARTMENT.

208-230/1/60


INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:


STATUS LIGHT	EQUIP. STATUS	CHECK
ON	NORMAL OPERATION	-
OFF	NO POWER OR INTERNAL CONTROL FAULT	CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL
1 BLINK	IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH	GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN
2 BLINKS	PRESSURE SWITCH OPEN	CHECK PRESSURE SWITCH
3 BLINKS	PRESSURE SWITCH CLOSED WITHOUT INDUCER ON	CHECK PRESSURE SWITCH
4 BLINKS	OPEN LIMIT SWITCH	MAIN LIMIT OPEN BAD SWITCH
5 BLINKS	FALSE FLAME SENSED	STICKING GAS VALVE
6 BLINKS	COMPRESSOR OUTPUT DELAY	3 MIN. COMP. ANTI-CYCLE TIMER

THC-FIELD WIRING


THC-NO ECONOMIZER



2 STAGE COOLING




THC-WITH ECONOMIZER OPTION



B4312003 REV. B


Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1330-48***1AB/AC

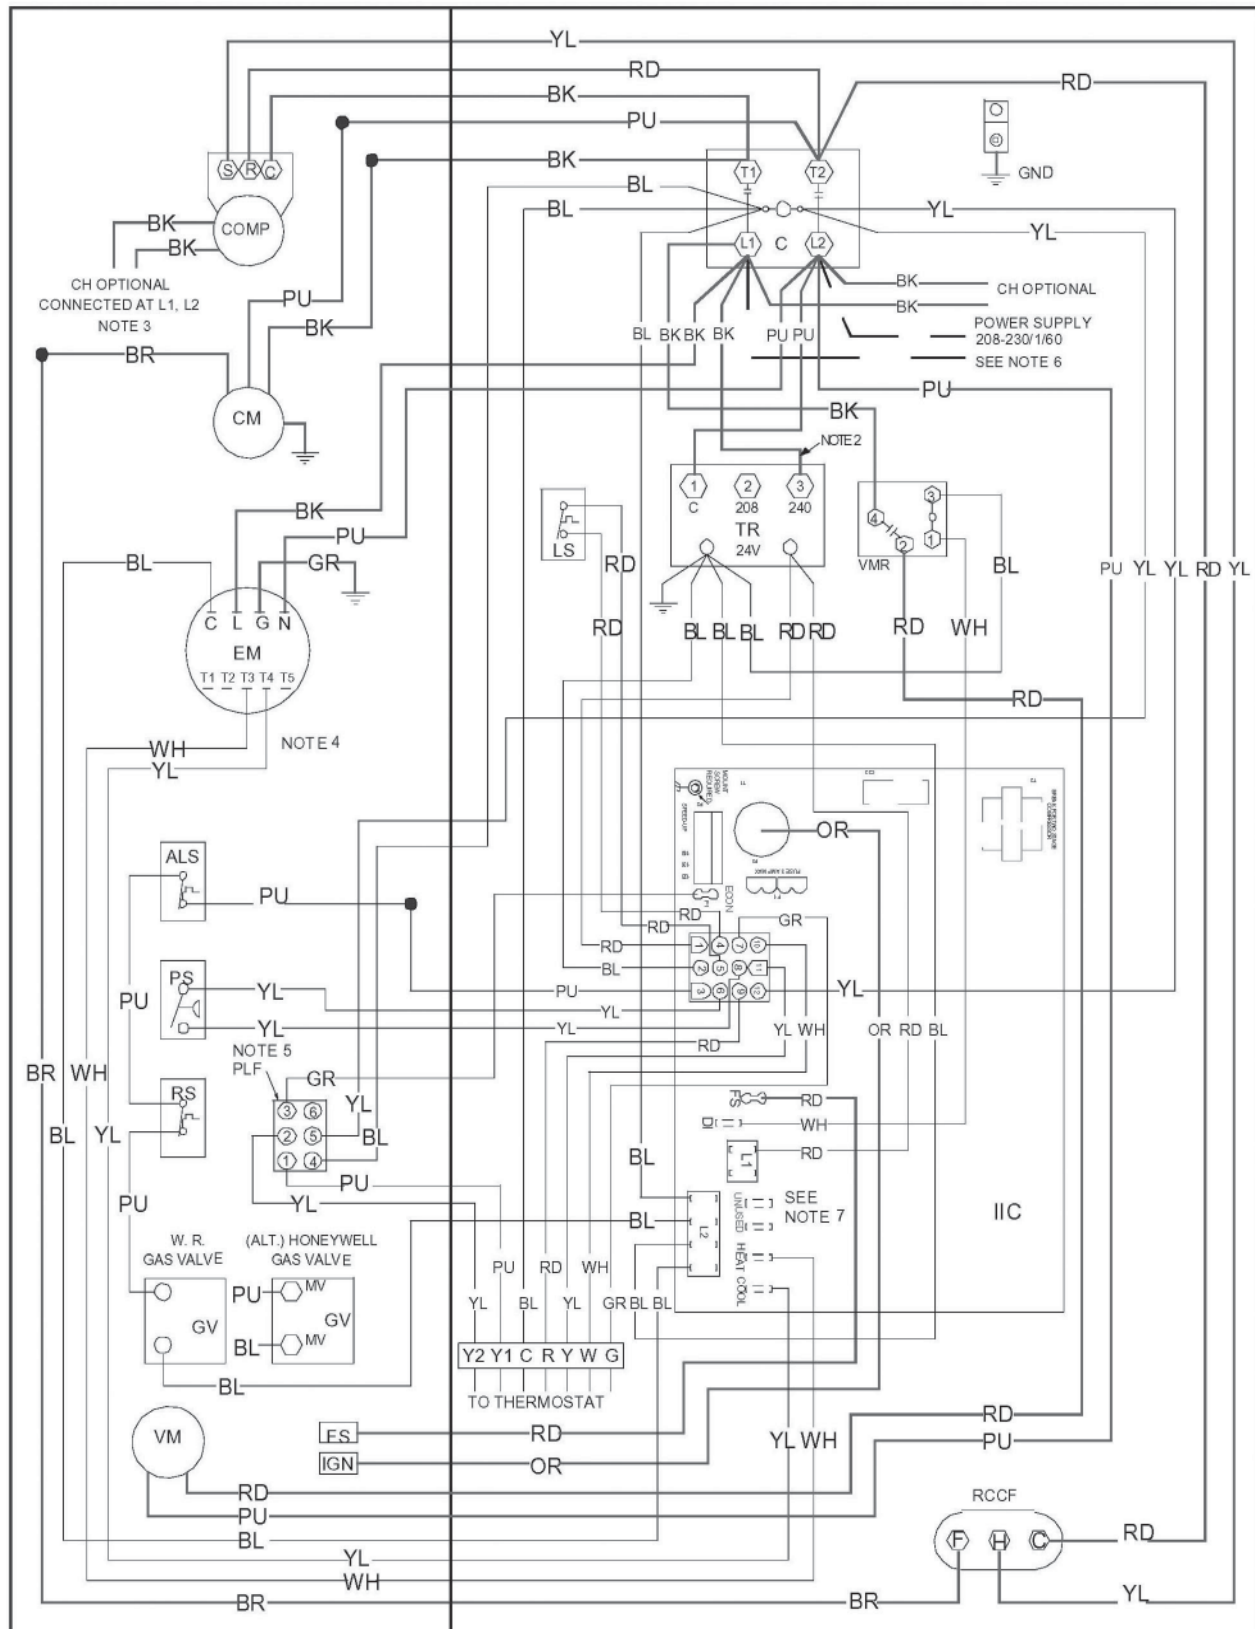


Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1348***1A/AA

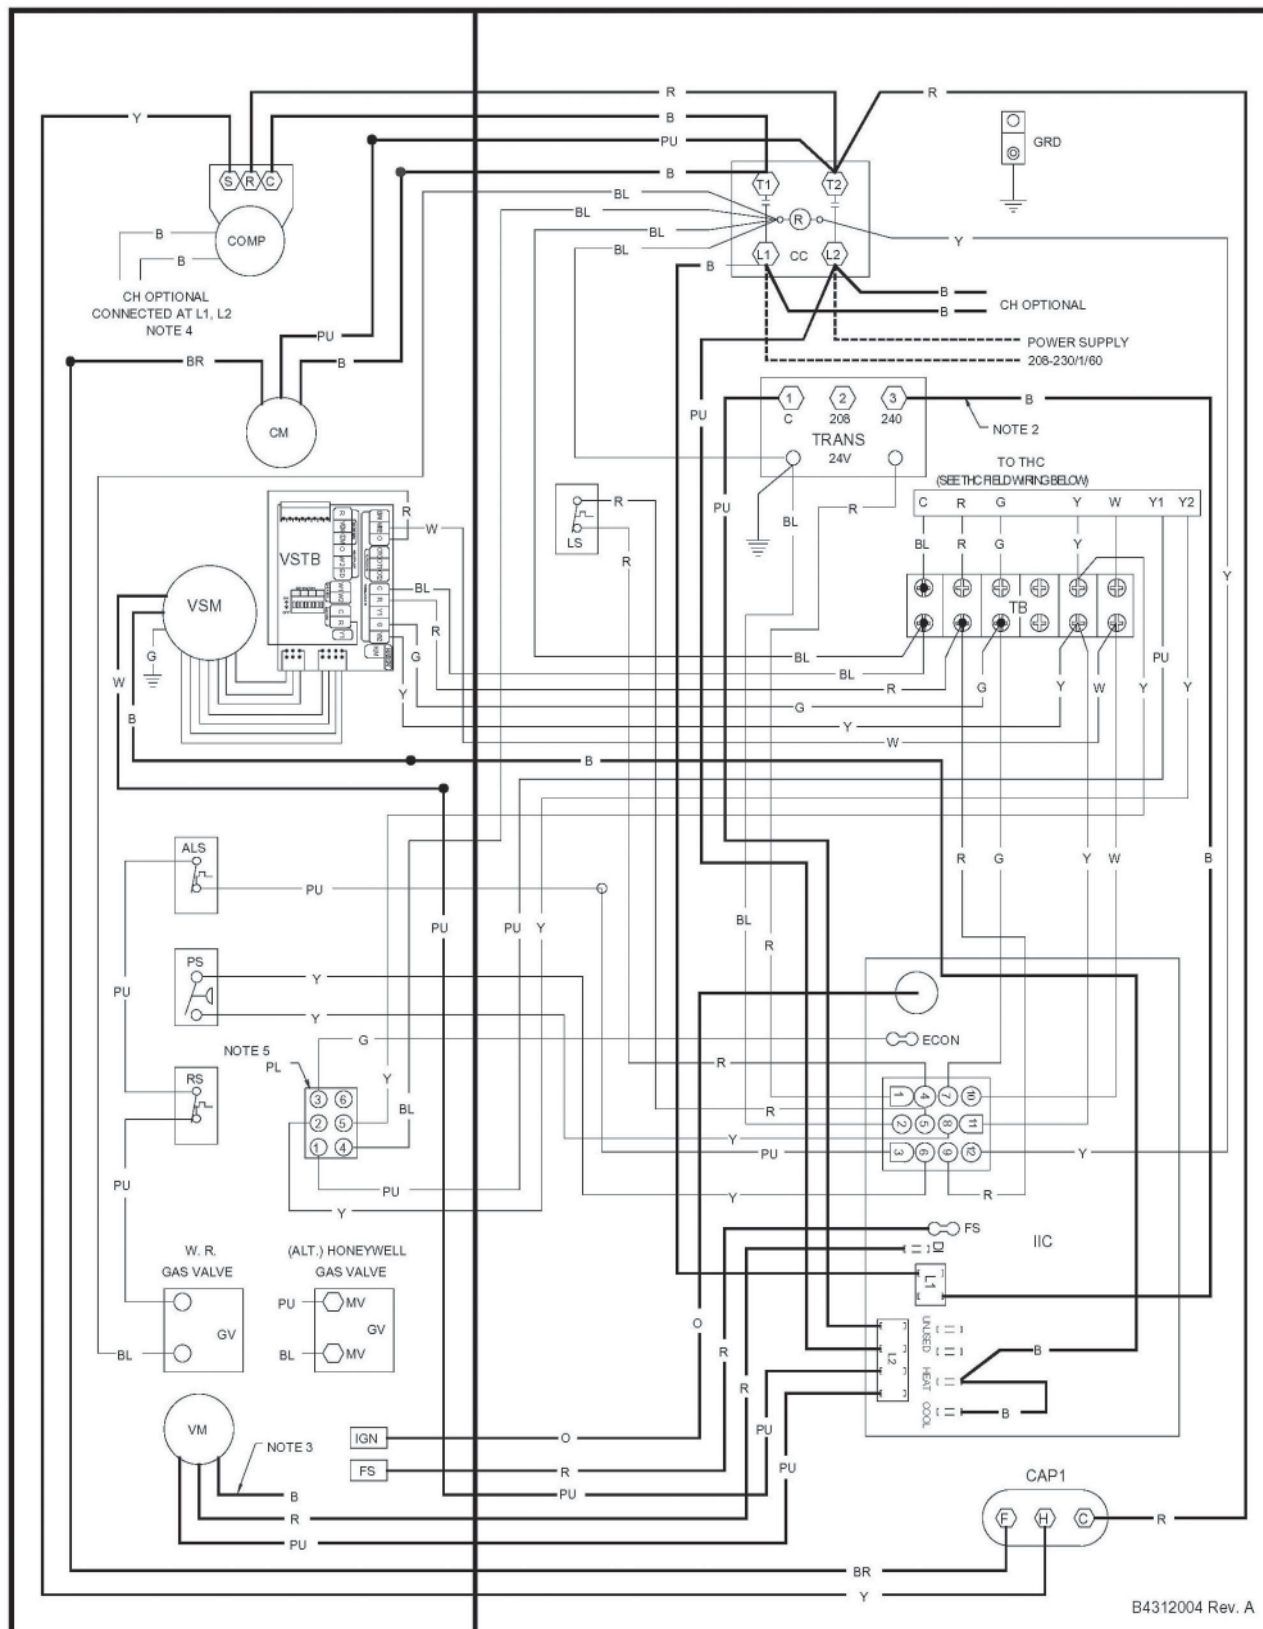

B4312004 Rev. A

WIRING DIAGRAM — GPG1348***1A/AA

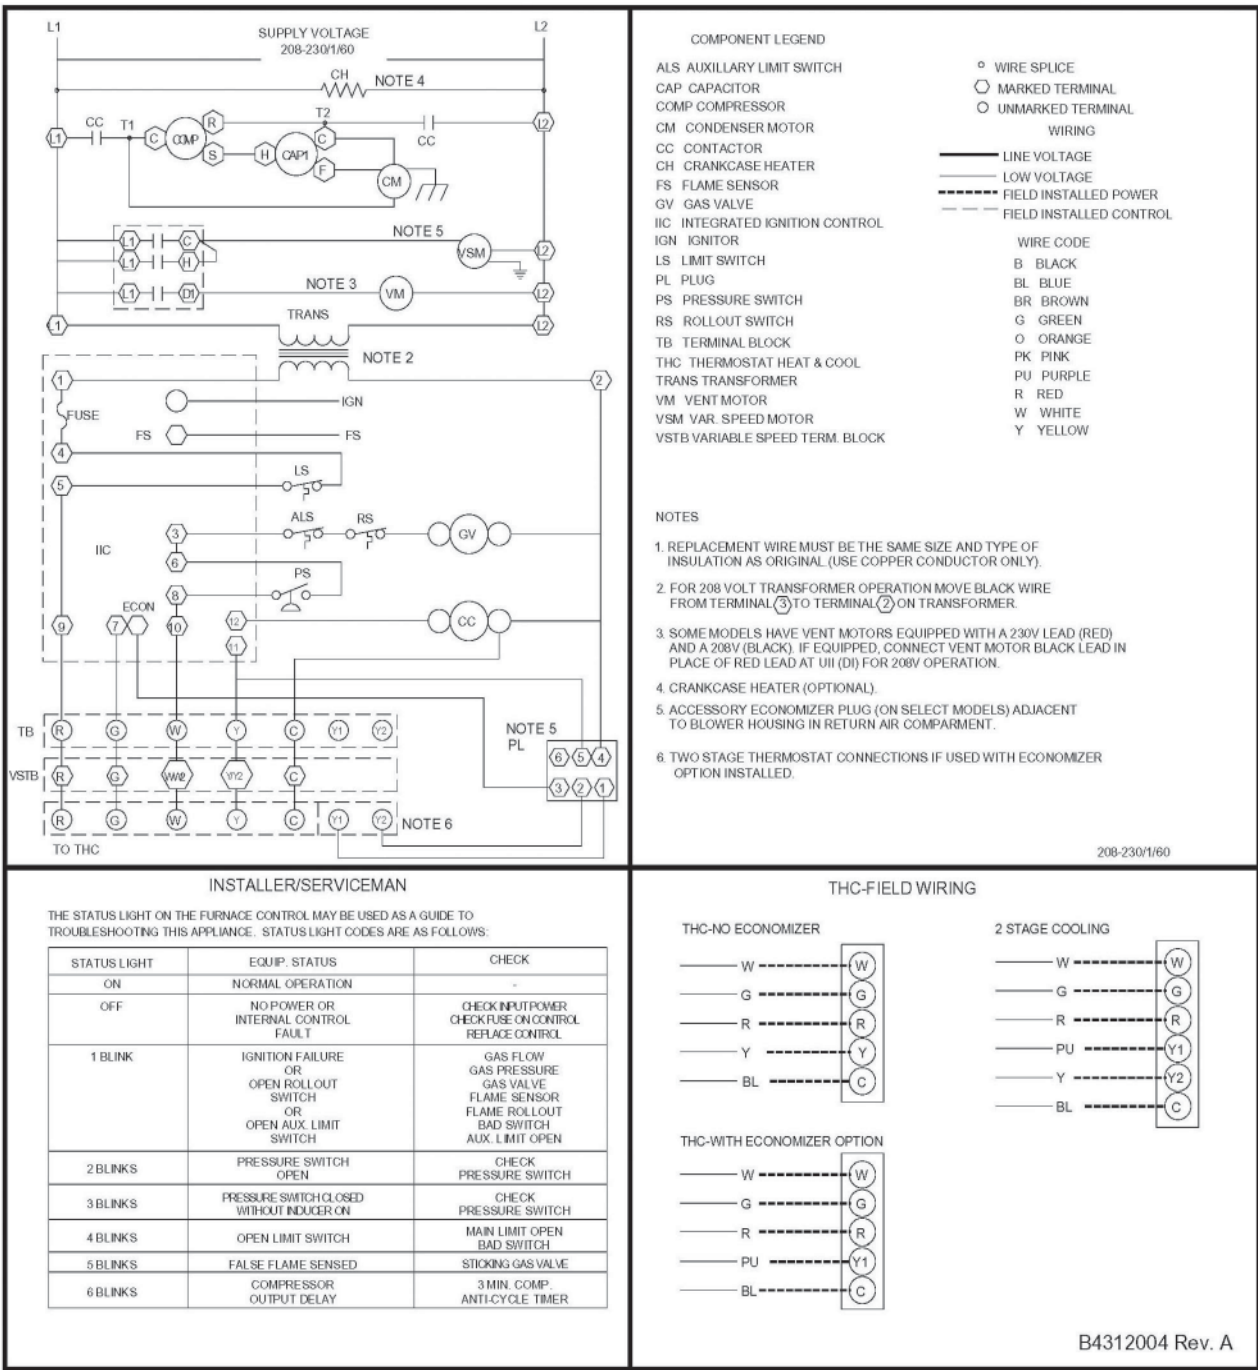

INSTALLER/SERVICEMAN

THE STATUS LIGHT ON THE FURNACE CONTROL MAY BE USED AS A GUIDE TO TROUBLESHOOTING THIS APPLIANCE. STATUS LIGHT CODES ARE AS FOLLOWS:

STATUS LIGHT	EQUIP. STATUS	CHECK
ON	NORMAL OPERATION	-
OFF	NO POWER OR INTERNAL CONTROL FAULT	CHECK INPUT POWER CHECK FUSE ON CONTROL REPLACE CONTROL
1 BLINK	IGNITION FAILURE OR OPEN ROLLOUT SWITCH OR OPEN AUX. LIMIT SWITCH	GAS FLOW GAS PRESSURE GAS VALVE FLAME SENSOR FLAME ROLLOUT BAD SWITCH AUX. LIMIT OPEN
2 BLINKS	PRESSURE SWITCH OPEN	CHECK PRESSURE SWITCH
3 BLINKS	PRESSURE SWITCH CLOSED WITHOUT INDUCER ON	CHECK PRESSURE SWITCH
4 BLINKS	OPEN LIMIT SWITCH	MAIN LIMIT OPEN BAD SWITCH
5 BLINKS	FALSE FLAME SENSED	STICKING GAS VALVE
6 BLINKS	COMPRESSOR OUTPUT DELAY	3 MIN. COMP. ANTI-CYCLE TIMER

THC-FIELD WIRING

THC-NO ECONOMIZER

W — W
G — G
R — R
Y — Y
BL — C

2 STAGE COOLING


W — W
G — G
R — R
PU — Y1
Y — Y2
BL — C

THC-WITH ECONOMIZER OPTION


W — W
G — G
R — R
PU — Y1
BL — C

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1348***1AB/AC

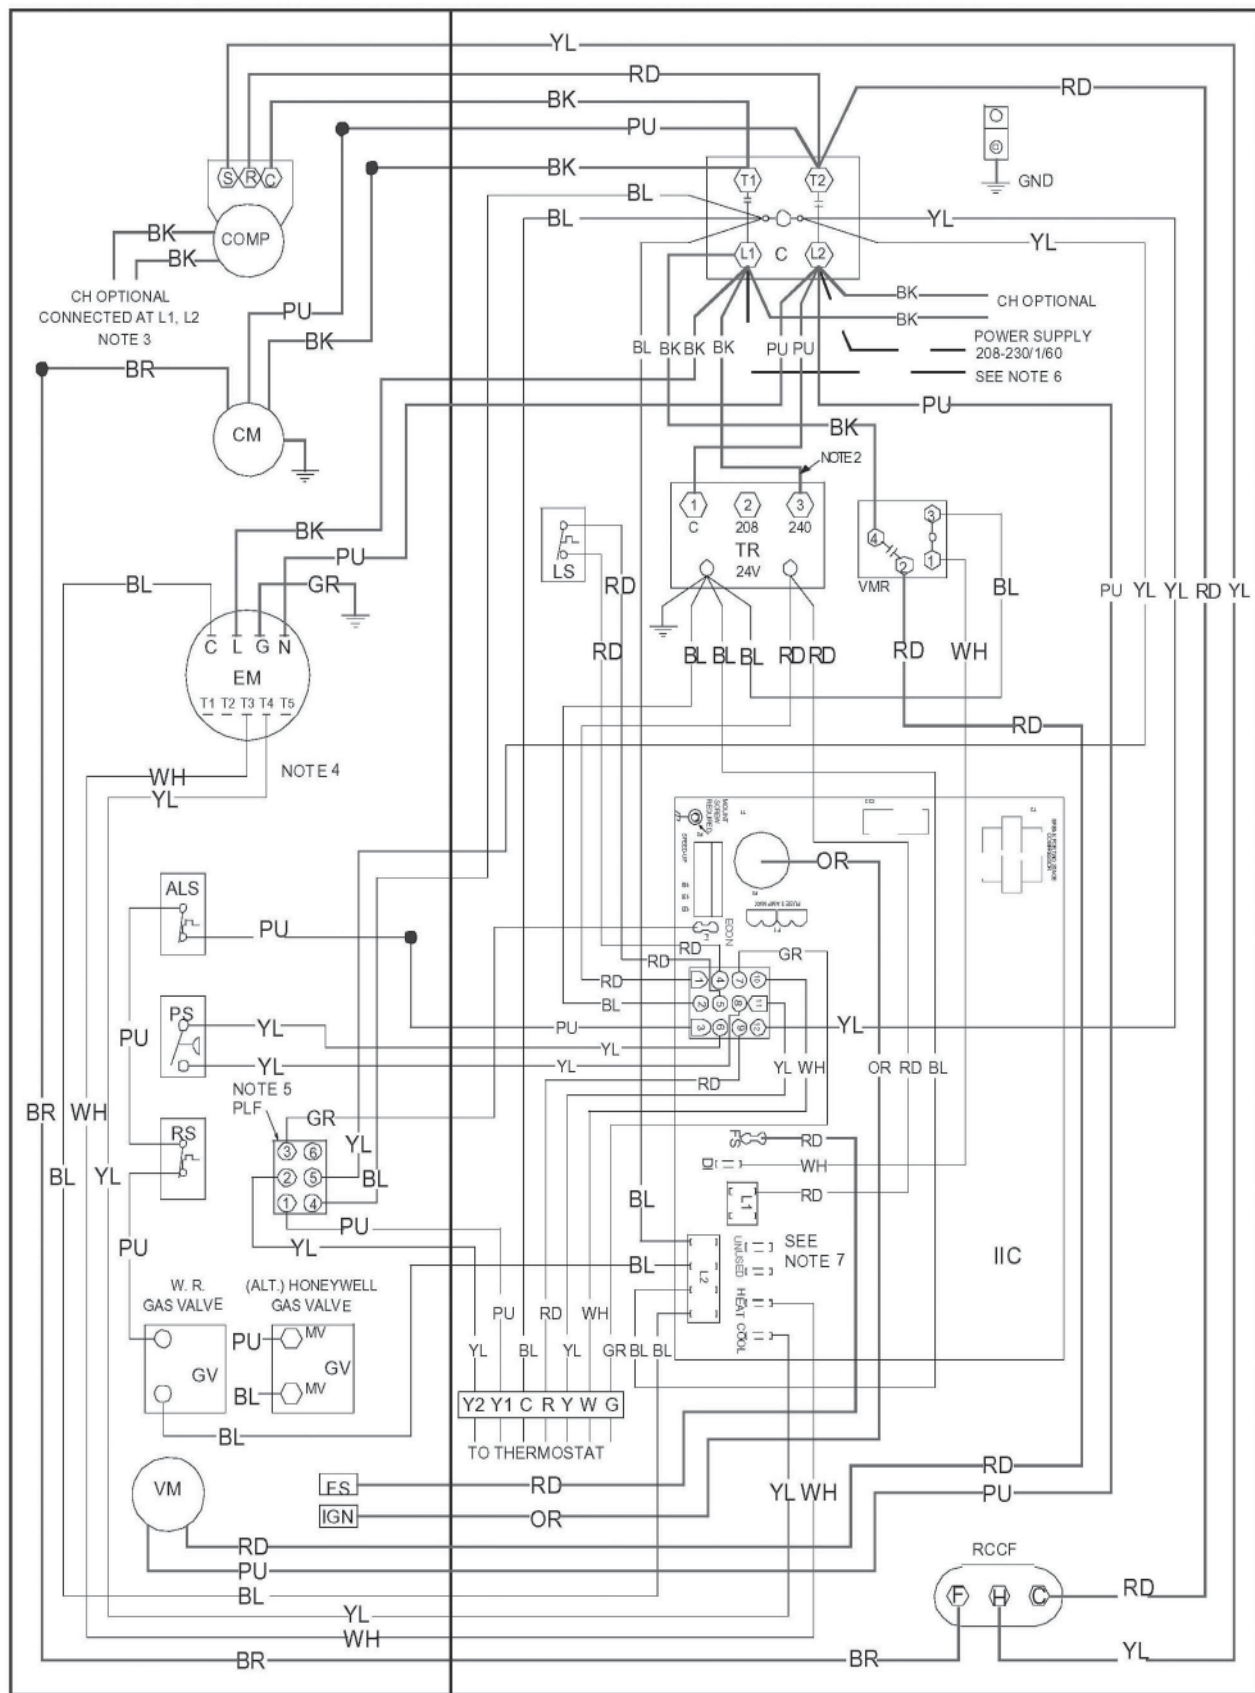


WIRING DIAGRAM — GPG1360***1A/AA

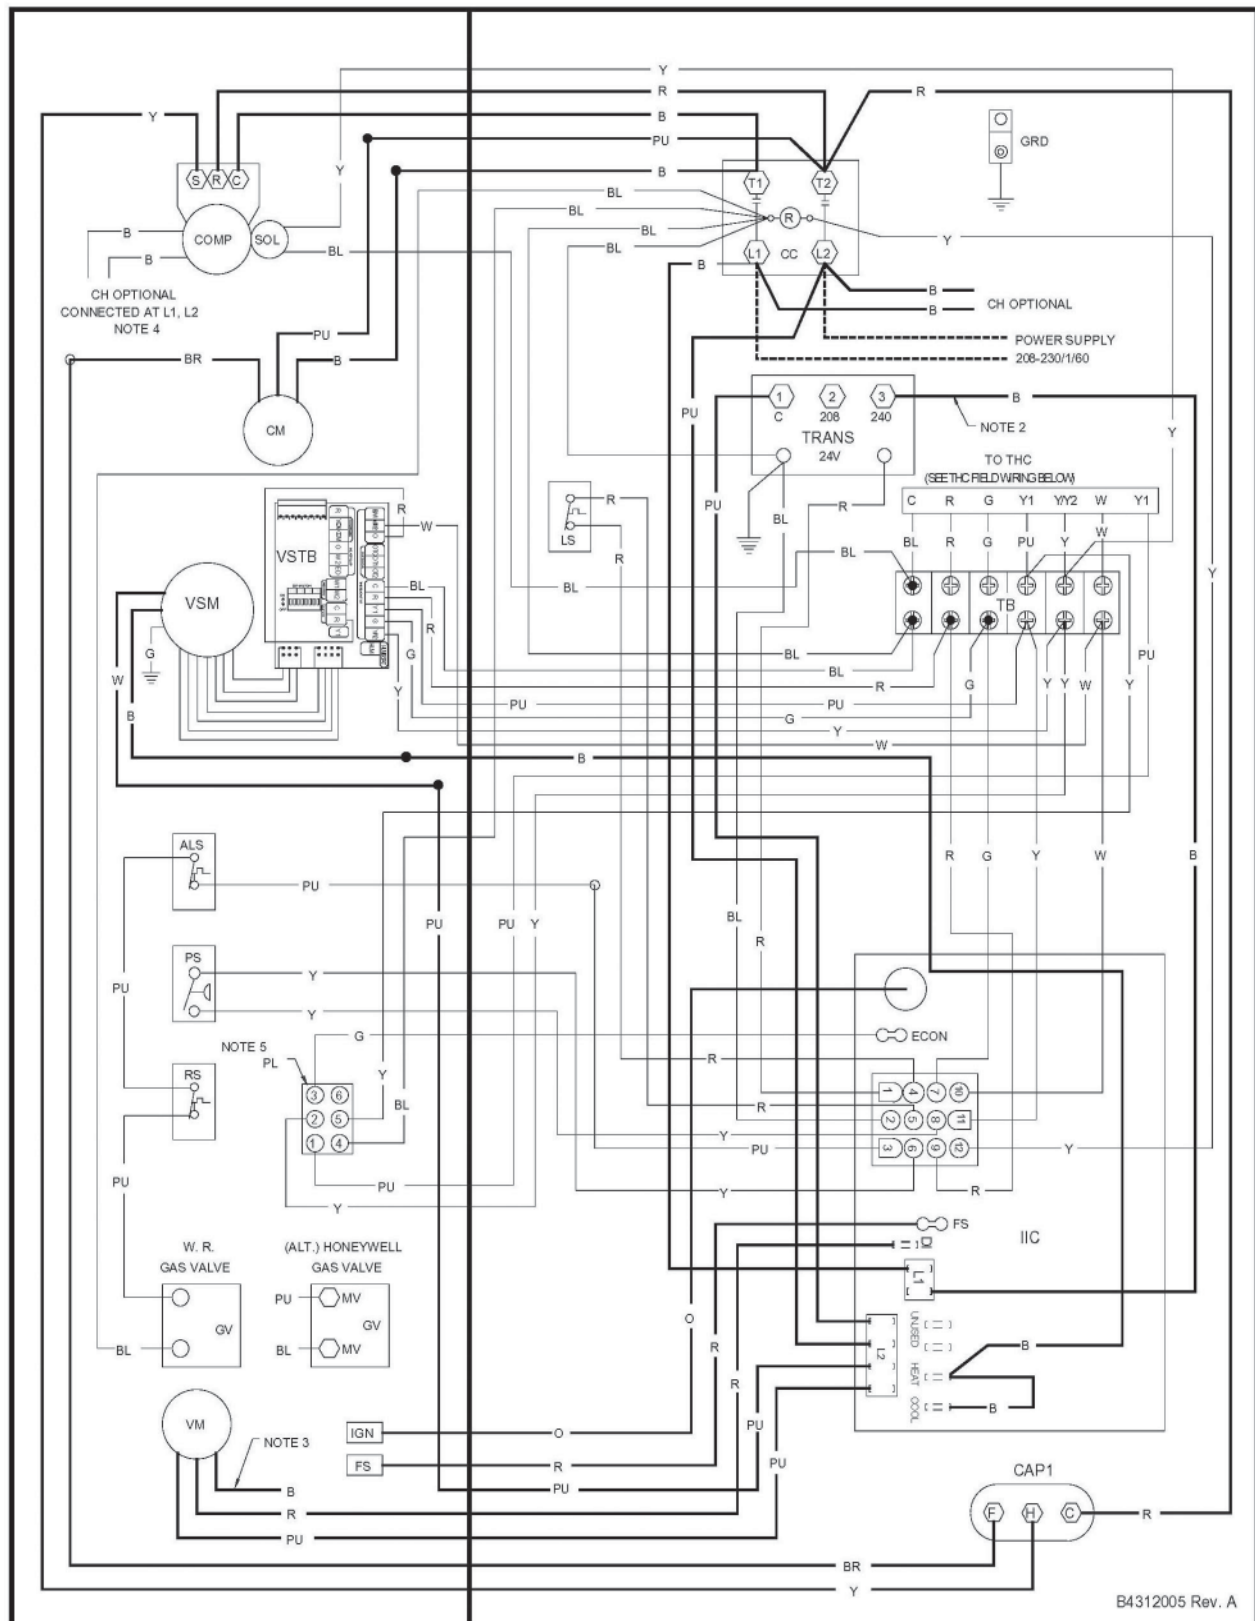

B4312005 Rev. A


Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1360***1A/AA (CONT.)

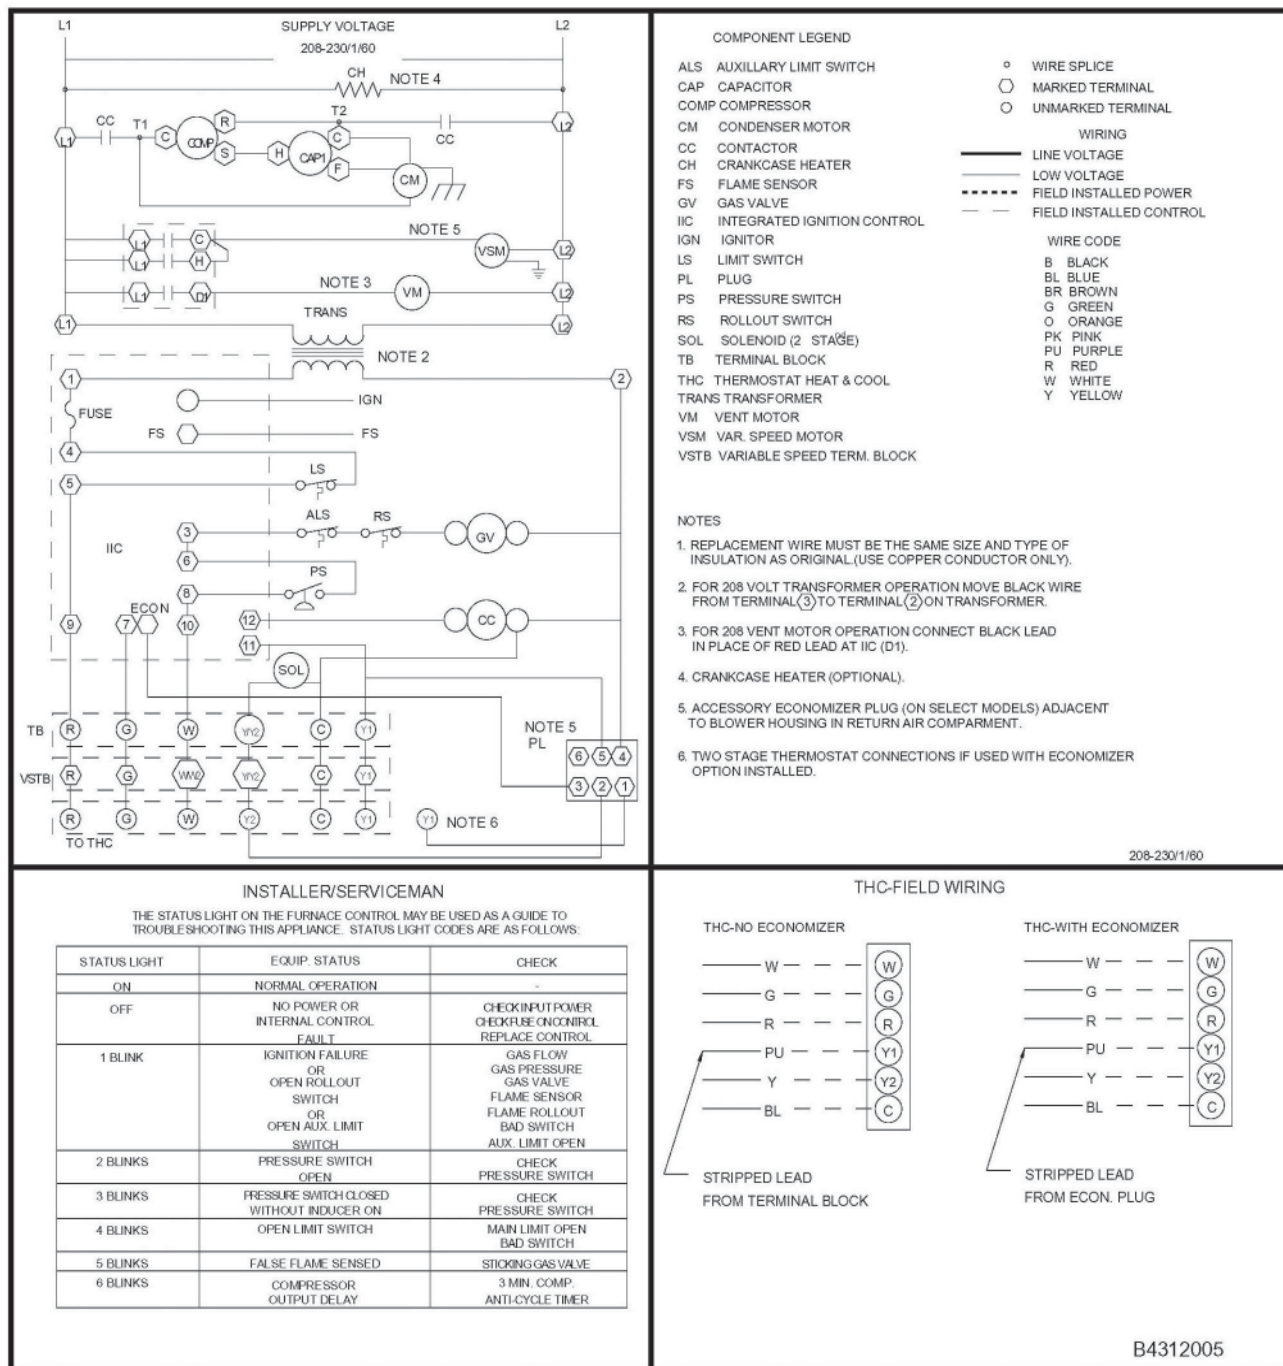


Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1360***1BA/BB

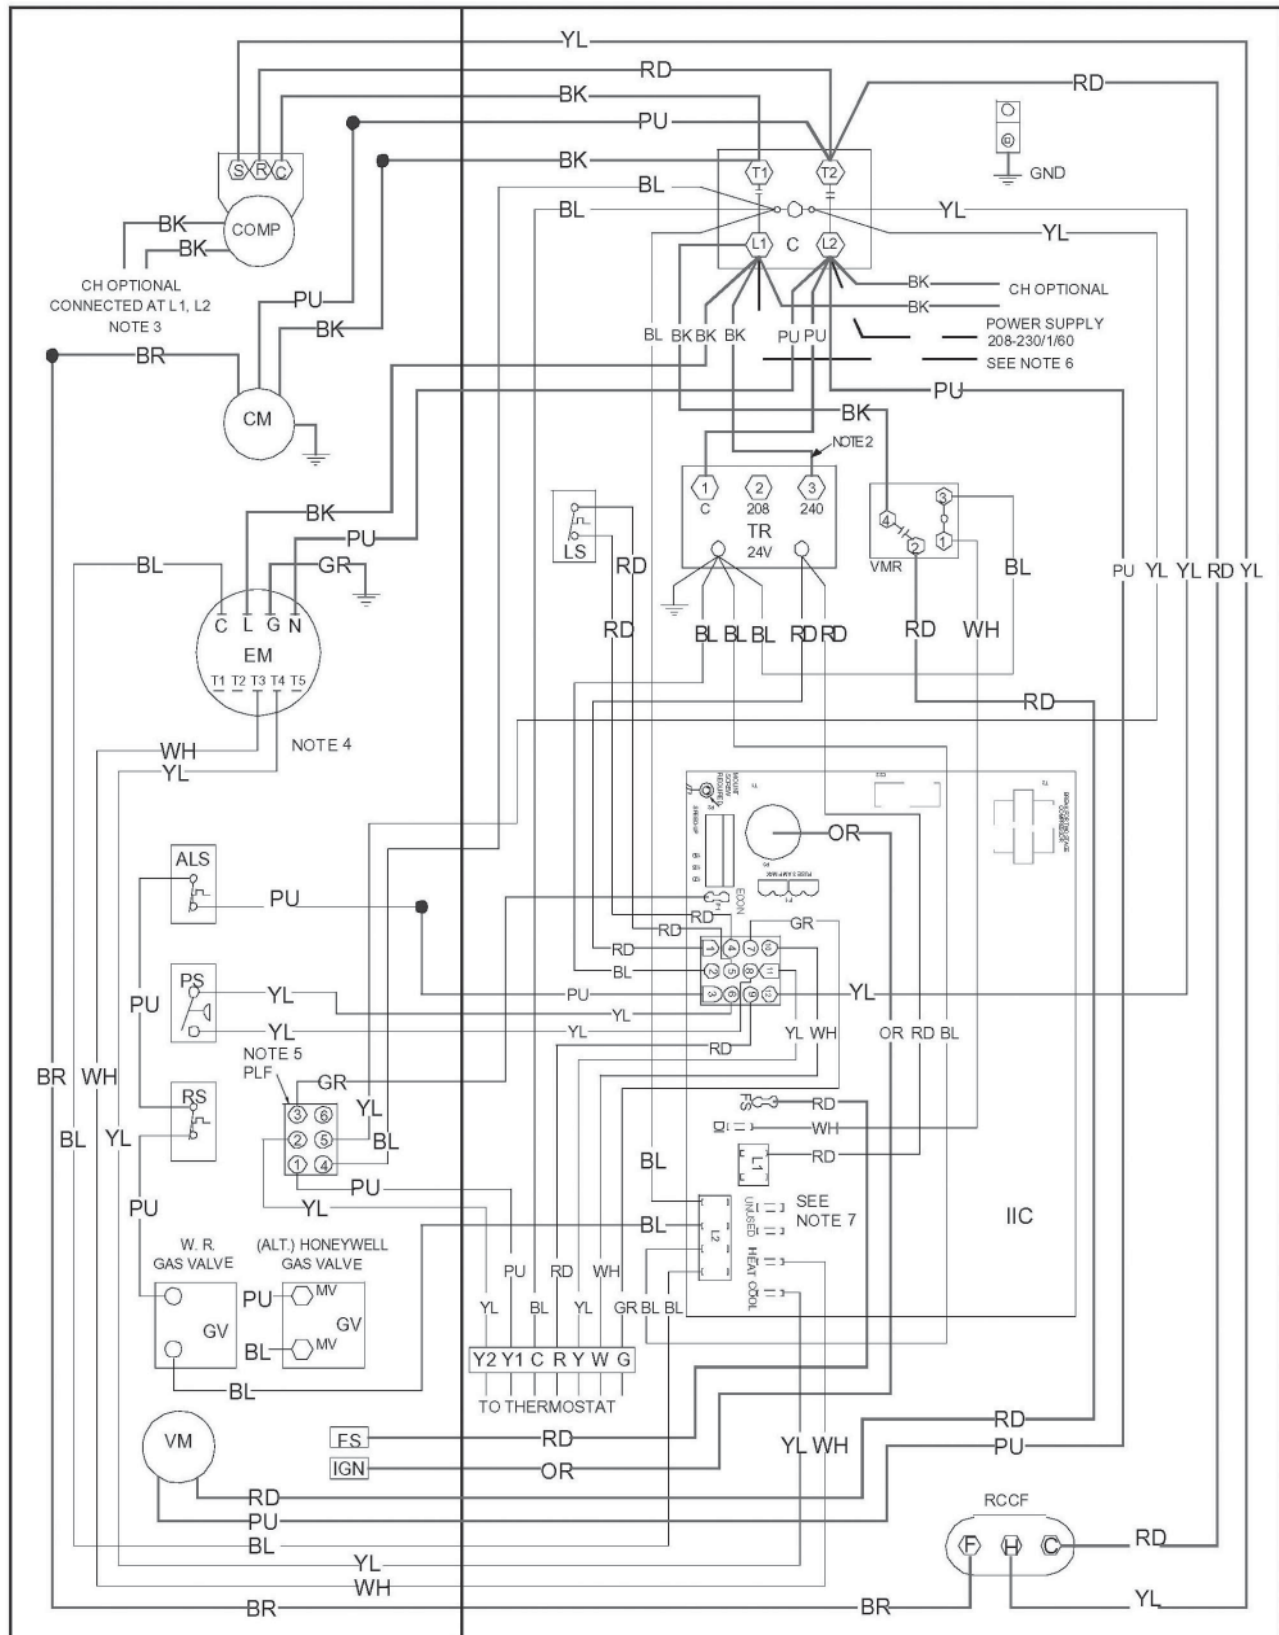

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

WIRING DIAGRAM — GPG1360***1BA/BB (CONT.)

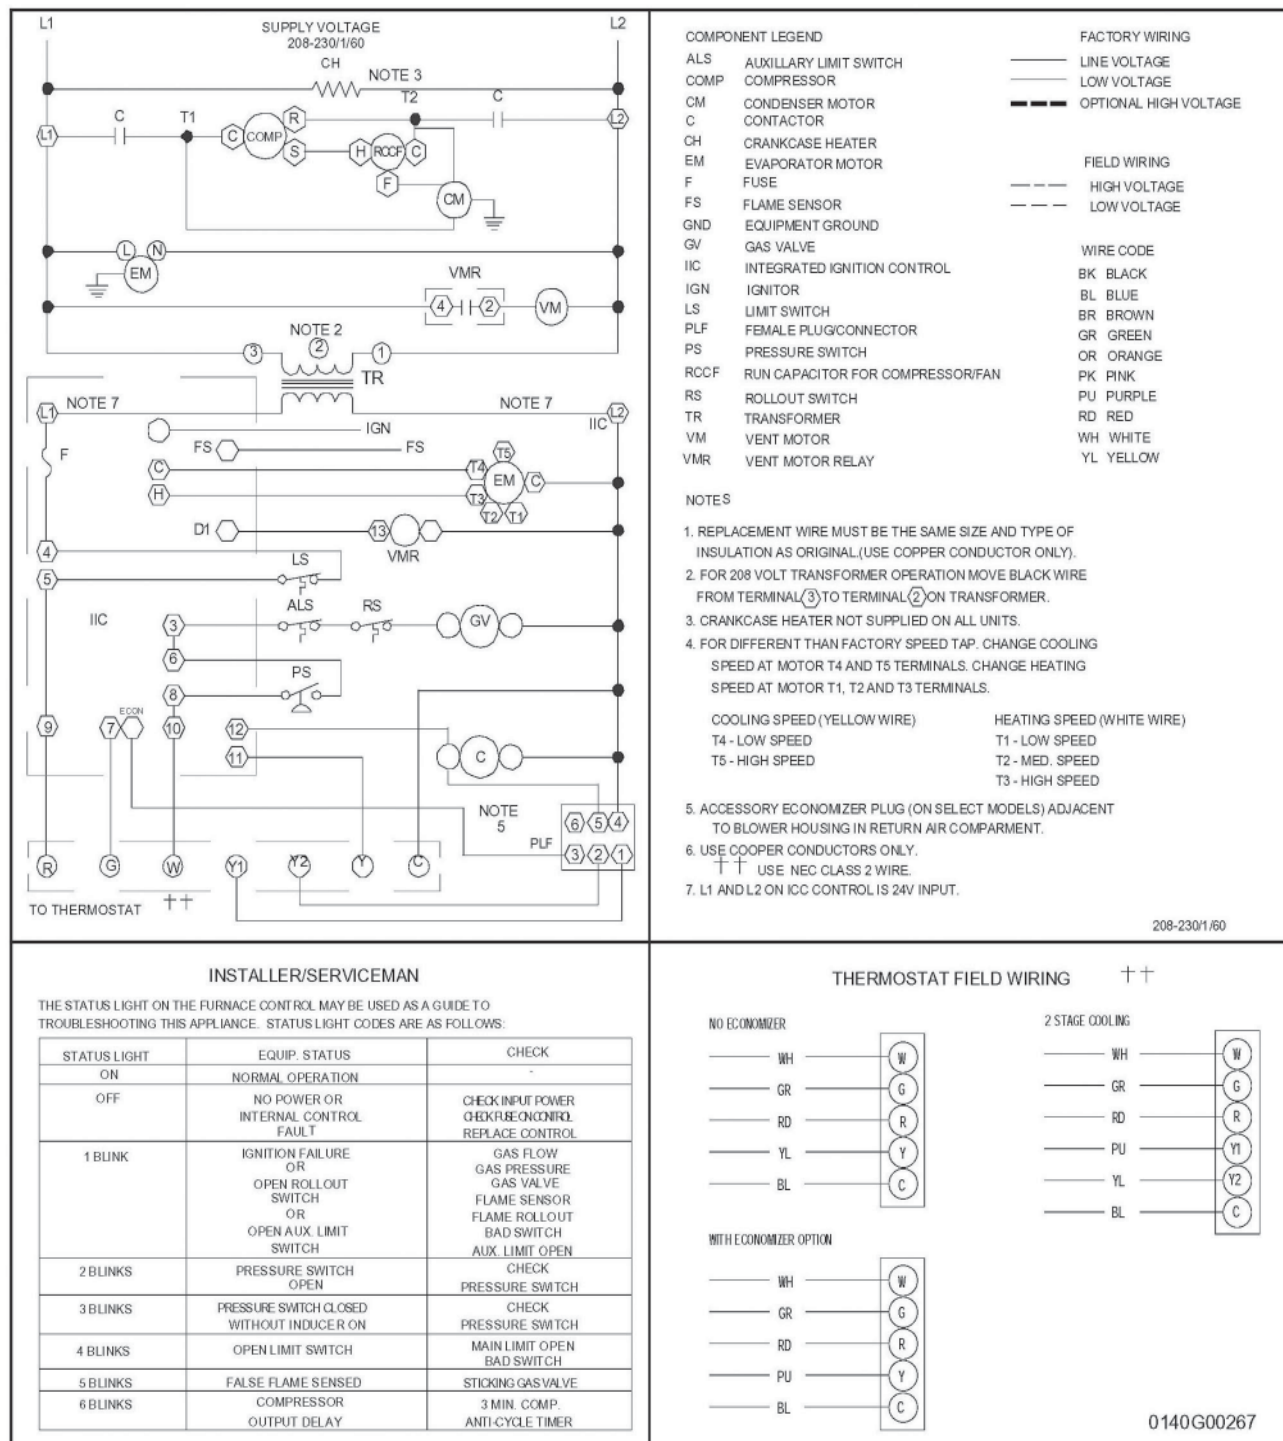

Wiring is subject to change, always refer to the wiring diagram on the unit for the most up-to-date wiring.

ACCESSORIES

Description	Part Numbers		
	Small Chassis	Medium Chassis	Large Chassis
Roof Curb	PGC101/102/103	PGC101/102/103	PGC101/102/103
Downflow Economizer	PGED101/102	PGED101/102	PGED103
Horizontal Economizer	PGEH101/102	PGEH101/102	PGEH103
Downflow Manual Damper	PGMDD101/102	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD 101/102	PGMDMD 101/102	PGMDMD 103
Horizontal Manual Damper	PGMDH101	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH 101	PGMDMH 102	PGMDMH 103
Filter Rack	PGFR101/102/103	PGFR101/102/103	PGFR101/102/103
Downflow Square-to-Round	SQRPG101/102	SQRPG101/102	SQRPG103
Horizontal Square-to-Round	SQRPGH101/102	SQRPGH101/102	SQRPGH103
Concentric Converter	CDK1-2	CDK1-2	CDK3
The above accessories are offered by McDaniel Metals • Main: (281) 987-8400 • Fax: (281) 987-9494			
LPT-00A	L.P. Conversion Kit for all size chassis		

THERMOSTATS

Part Number	Description
CHSATG	White, 1-Stage Heating/1-Stage Cooling, Non-programmable
CH70TG	White, 1-Stage Heating/1-Stage Cooling, Non-programmable, Digital
CHTS36-60	Beige, 1-Stage Heating/2-Stage Cooling
1213423	White, 2-Stage Heating/2-Stage Cooling, Digital

